




Disconnect Terminal Blocks

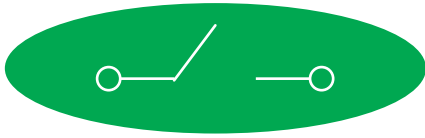


Both the DN-DIS10 and the DN-KBD12 allow fast circuit disconnection without rewiring. The DN-DIS10 is supplied with a copper disconnect bar installed in the fuse holder. The DN-KBD12 offers circuit disconnection capability by means of a pivoting, insulated “knife blade”.




DN-DIS10

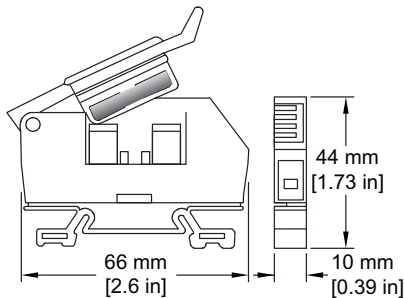

DN-KBD12

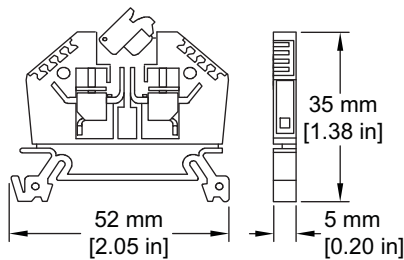

DN-ECKBD

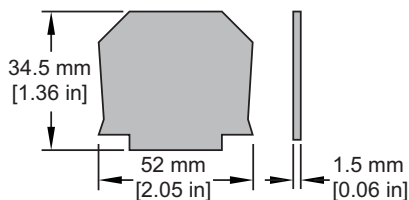

| | Part # | Pcs/Pkg | Price/Pkg | Part # | Pcs/Pkg | Price/Pkg |
|--|---|---------|------------------|---------------------|---------|--------------------|
| Gray Disconnect Block | DN-DIS10 | 50 | <---> | DN-KBD12 | 50 | <---> |
| Disconnect Terminal Blocks Specifications | | | | | | |
| UL Approval* | 300V | 30A | 24-10AWG | 600V | 20A | 22-12AWG |
| CSA Approval | 300V | 25A | 18-12 AWG | 600V | 16A | 18-12AWG |
| VDE Approval | 500V | 25A | 4mm ² | 600V | 16A | 2.5mm ² |
| CE Conformity | CE 23/20, CE 23/21 | | | CE 23/20, CE 23/21 | | |
| Agency File# | E179129, LR84816 | | | E179129, LR84816 | | |
| Wire Strip Length | 0.39" (10mm) | | | 0.39" (10mm) | | |
| Tightening Torque | 5.5 lb-in. (0.6Nm) | | | 4.5 lb-in. (0.5Nm) | | |
| Density | 30 pcs./ft. (125/m) | | | 60 pcs./ft. (200/m) | | |
| Disconnect Type | Copper bar | | | Copper blade | | |
| Operating Temperature | Ambient air temperature: -13°F to 104°F (-25°C to 40°C) Relative humidity: 50% max at 104°F (40°C); 90% max at 68°F (20°C) | | | | | |

| Accessories | | | | | | |
|-------------------------------|---|---------|-----------|---------------------|---------|-----------|
| | Part # | Pcs/Pkg | Price/Pkg | Part # | Pcs/Pkg | Price/Pkg |
| 35 mm DIN Rail | ADC Part No. DN-R35S1 (7.5 mm) or DN-R35HS1 (15 mm) | | | | 10 | various |
| End Bracket | DN-EB35 | | | | 50 | <---> |
| | DN-EB35MN | | | | 20 | <---> |
| | DN-EB35-A | | | | 50 | <---> |
| | DN-QEB35 | | | | 50 | <---> |
| End Cover | Included | - | - | DN-ECKBD | 100 | <---> |
| Marking Tags | DN-L/DN-LT series | 500/100 | various | DN-LA /DN-LT series | 500/100 | various |
| Angled Support Bracket | DN-ASB1 | | | | 50 | <---> |

*Note: For copper wire only

For more information on accessories, see the “DINnectors Accessories” section of this chapter.