


Specialty Modules

Please note: \$US prices shown
For current \$AUD visit www.directautomation.com.au

P3-HSI \$563.00

High-Speed Pulse Input The P3-HSI is a high-speed pulse (1MHz) input module that has both differential and single ended inputs. This module accepts Pulse/Direction and Quadrature signals on each of the two independent input channels. It also provides four general purpose high-speed inputs and four general purpose 5–24 VDC 0.5 amp, outputs.

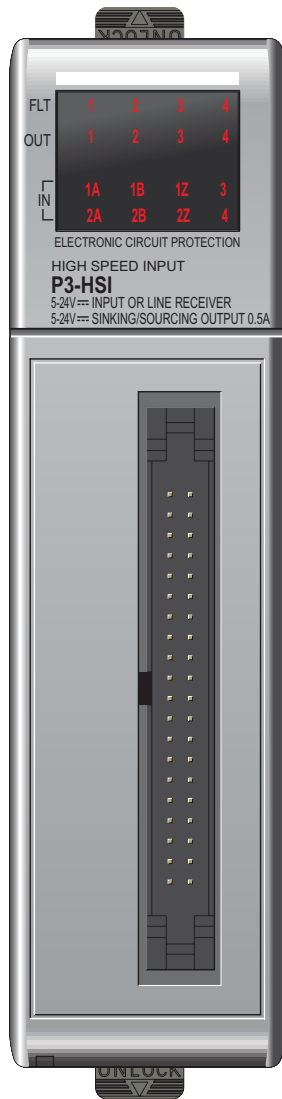

**No terminal block sold
for this module; ZIPLink
required.**

| General Specifications | |
|--------------------------------------|--|
| Module Type | Intelligent |
| Modules per Base | 11 Max |
| I/O Points Used | None, mapped directly to tags in CPU |
| Surrounding Air Temperature | 0°C– 60°C (32°F–140°F) |
| Storage Temperature | -20°C–70°C (-4°F–158°F) |
| Humidity | 5 to 95% (non-condensing) |
| Environmental Air | No corrosive gases permitted |
| Vibration | IEC60068-2-6 (Test Fc) |
| Shock | IEC60068-2-27 (Test Ea) |
| Field to Logic Side Isolation | 1800VAC applied for 1s |
| Insulation Resistance | >10MΩ @ 500VDC |
| Heat Dissipation | 5.76 W |
| Enclosure Type | Open equipment |
| Emissions | EN61000-6-4 (Conducted and radiated RF emissions) |
| Module Keying to Backplane | Electronic |
| Module Location | Any I/O slot in any local, expansion, or remote base in a Productivity3000 system. |
| Field Wiring | Use ZIPLink wiring system. See Wiring Solutions. |
| Weight | 113.4 g (4oz) |
| Agency Approvals | UL508 file E157382, Canada & USA CE (EN61131-2*) |

*Meets EMC and Safety requirements. See the Declaration of Conformity for details.

| Power Specifications | |
|--|--------------------------|
| External Power | 24VDC +10%/-15%, Class 2 |
| Maximum Voltage | 26.4 VDC |
| Minimum Voltage | 20.4 VDC |
| Current Consumption Excluding Outputs | 47mA |
| Maximum Current Consumption Total of the 4 Status Outputs | 2A |

| Connector Specifications | |
|--------------------------|--|
| Connector Type | IDC style header with latch, Omron XG4A-4034 |
| Number of Pins | 40 point |
| Pitch | 0.1 in. (2.54 mm) |

See Wiring Solutions for part numbers of ZIPLink cables and connection modules required with this I/O module.



NOTE: The most recent Productivity Suite software and firmware versions may be required to support new modules and new features.


Specialty Modules

P3-HSI (cont'd)

| Single Ended (5-24V) Input Specifications | |
|---|---|
| Status Input | Single ended inputs (8 pts: 1A, 1B, 1Z, 2A, 2B, 2Z, 3IN, 4IN) |
| Isolation | Each input is isolated from other circuits |
| Input Volts Range | 5–24 VDC |
| Input Volts Maximum | ±34 VDC, limited by protection |
| Input Impedance | 1k Ω min., 5k Ω max. |
| Inputs Rated Current | 5–24 VDC, 16mA 5.2 mA typ. @ 5VDC 22mA max. @ 34VDC |
| Input Minimum ON Voltage | 4.5 VDC |
| Input Maximum OFF Voltage | 2.0 VDC |
| Input Minimum ON Current | 5.0 mA |
| Input Maximum OFF Current | 1.4 mA |
| OFF to ON Response Time | 1A, 1B, 2A, 2B: 0.48 μ s 1Z, 2Z, 3IN, 4IN: 6 μ s |
| ON to OFF Response Time | 1A, 1B, 2A, 2B: 0.48 μ s 1Z, 2Z, 3IN, 4IN: 6 μ s |
| Max. Input Frequency | 1A, 1B, 2A, 2B: 200kHz* 1Z, 2Z, 3IN, 4IN: 200kHz* |

* Inputs are not limited to this speed but single ended signals are not usually reliable above 200kHz due to cabling capacitance.

Status Inputs

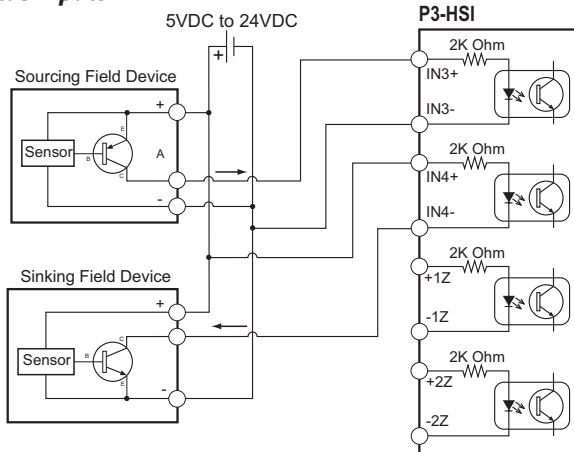


| Differential (5V) Input Specifications | |
|--|---|
| Pulse Inputs | Differential inputs (6 pts: 1A, 1B, 1Z, 2A, 2B, 2Z) |
| Isolation | Each input is isolated from other circuits |
| Input Signal Type, per Channel Select | Differential |
| Input Volts | 5VDC |
| Input Volts Maximum | ±5.6 VDC, limited by protection |
| Input Impedance | 200 Ω min., 500 Ω max. |
| Inputs Rated Current | 5VDC, 15mA (8mA typ., 15mA max.) |
| Input Minimum ON Voltage | 3.0 VDC |
| Input Maximum OFF Voltage | 1.0 VDC |
| Input Minimum ON Current | 5.0 mA |
| Input Maximum OFF Current | 2.0 mA |
| OFF to ON Response Time | 1A, 1B, 2A, 2B: 0.48 μ s 1Z, 2Z, 3IN, 4IN: 6 μ s |
| ON to OFF Response Time | 1A, 1B, 2A, 2B: 0.48 μ s 1Z, 2Z, 3IN, 4IN: 6 μ s |
| Max. Input Frequency | 1A, 1B, 2A, 2B: 1MHz 1Z, 2Z, 3IN, 4IN: 300kHz* |

| Status Output Specifications | |
|--|---|
| Status Outputs | 4 Outputs |
| Output Signal Type, per Output | Current Sinking Current Sourcing |
| Operating Voltage¹ | 5–24 VDC 5–24 VDC ¹ |
| Output Volts Maximum | 36VDC 26.4 VDC ¹ |
| Output Current Maximum | 500mA 500mA |
| Overcurrent Protection | Short circuit detect and current limit with automatic retry for each output |
| Output Self Limiting Current | 1.2 to 2.4 amps |
| Max. Inrush Current | Self limited |
| Output Voltage Drop | 0.7 VDC @ 0.5 A 0.7 VDC @ 0.5 A |
| Thermal Protection | Independent over-temperature protection each output |
| Output Voltage Clamp During Inductive Switching | +45VDC -20VDC |
| Maximum OFF to ON Response | 25ms ² |
| Maximum ON to OFF Response | 25ms ² |

Notes:

1. Operating voltage of current sourcing outputs must be no greater than external power.
2. Measured at 5VDC operating voltage, 0.5 A load current.

Status Outputs

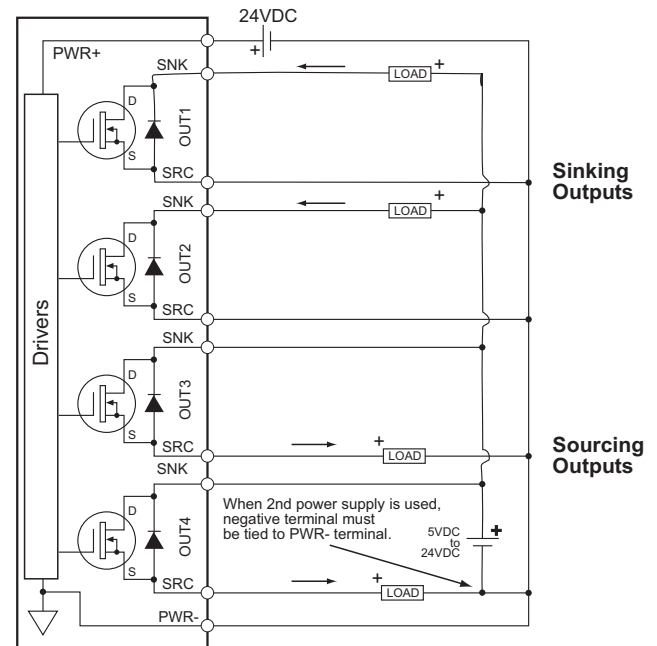

Note: The voltage difference between the input pairs must be between 3–5.6 volts.


* The Z pulse input (1Z & 2Z) is capable of capturing a 1 MHz wide pulse for the purpose of resetting an encoder count but a 3 microsecond pause (300kHz) is required between pulses.

Specialty Modules


P3-HSI (cont'd)

5V Encoder Inputs

To prevent damage to P3-HSI 5V inputs, do not exceed 6.8 V or 30mA on inputs 1A, 1A, 1B, 1B, 1Z, 1Z, 2A, 2A, 2B, 2B, 2Z, & 2Z.

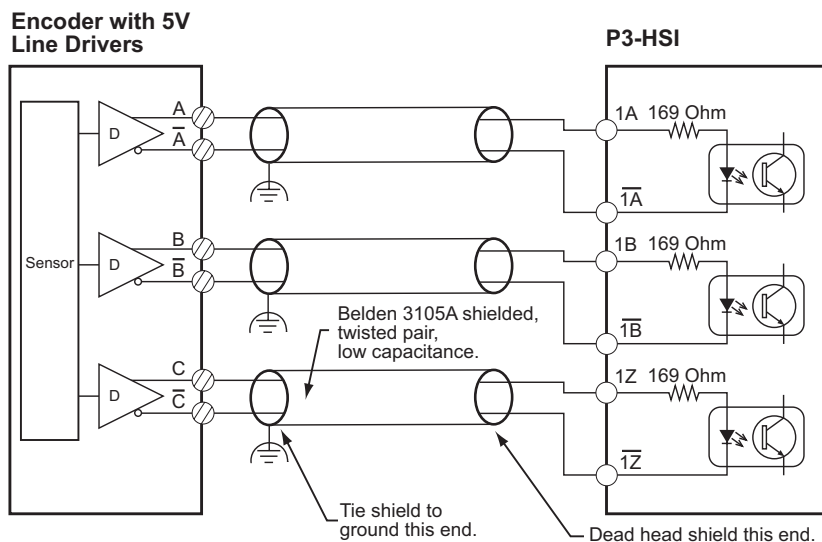

24V Encoder Inputs

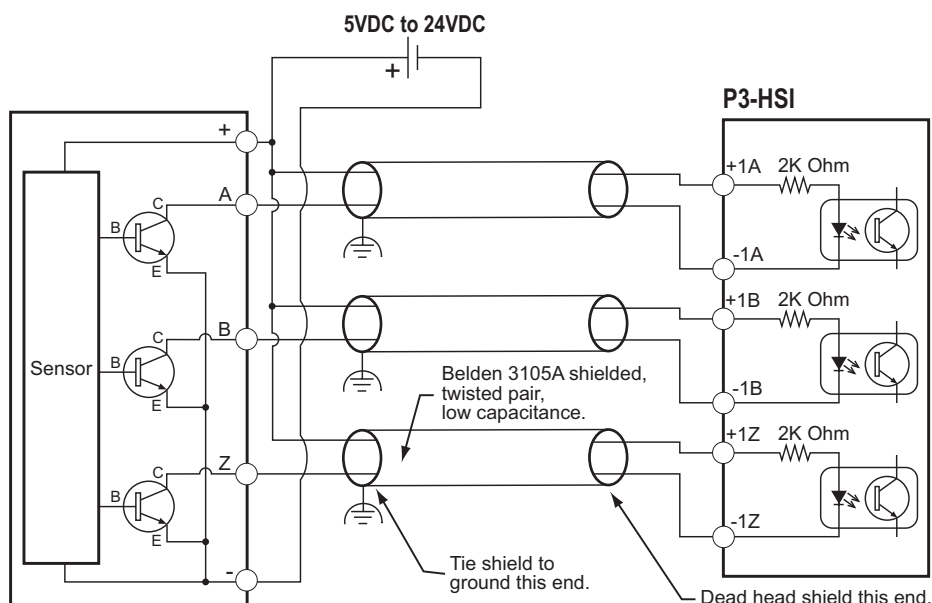


Specialty Modules

P3-HSI (cont'd)


Sinking I/O Wiring Diagram

Do not exceed 6.8V on these inputs

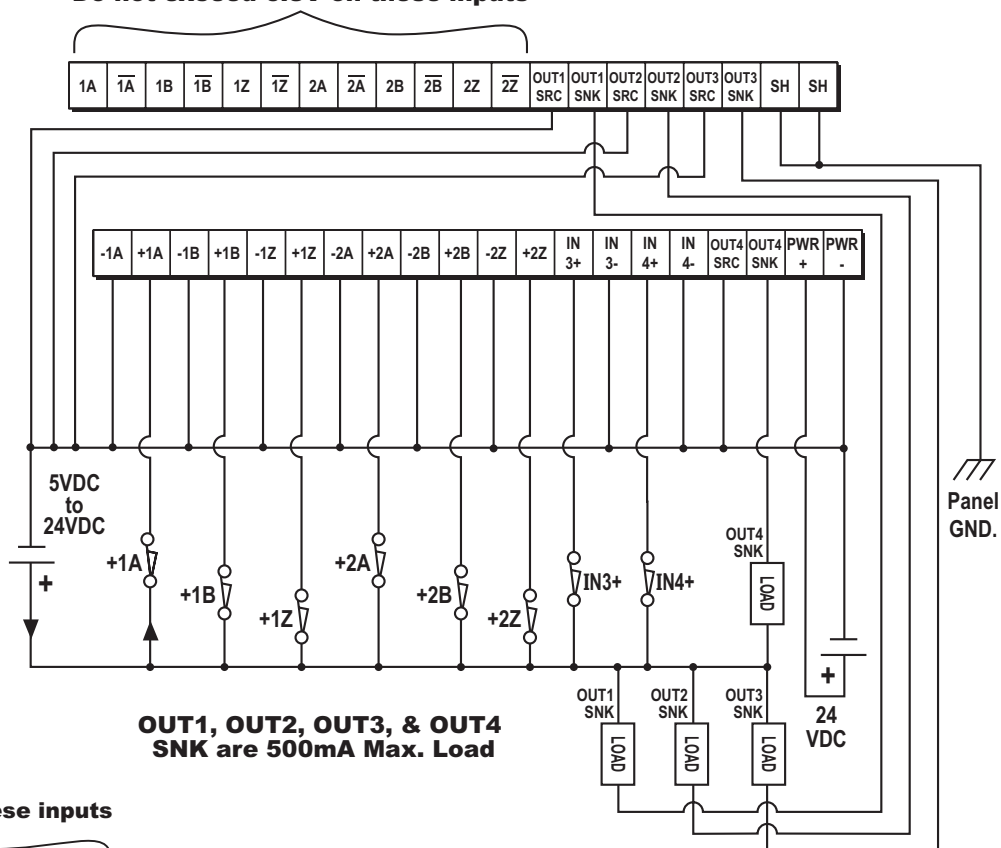

Sourcing I/O Wiring Diagram

Do not exceed 6.8V on these inputs

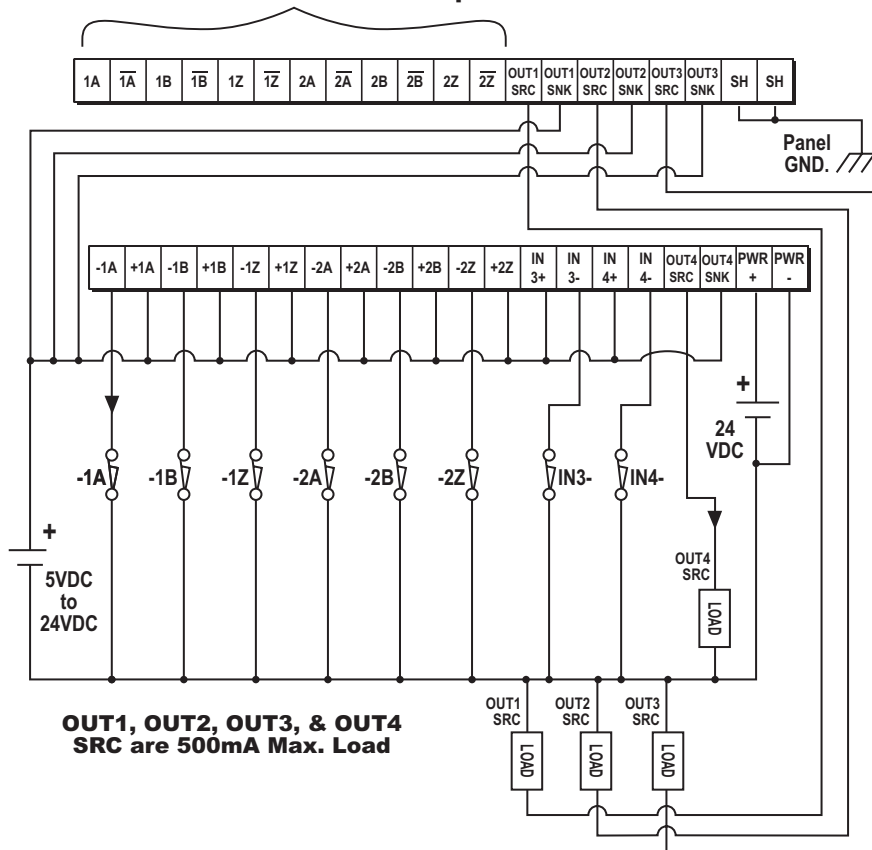



Wiring Solutions


Wiring Solutions using the ZIPLink wiring system

ZIPLinks eliminate the normally tedious process of wiring between devices by utilizing prewired cables and DIN rail mount connector modules. It's as simple as plugging in a cable connector at either end or terminating wires at only one end. Prewired cables keep installation clean and efficient, using half the space at a fraction of the cost of standard terminal blocks. There are several wiring solutions available when using the **ZIPLink** System ranging from

PLC I/O-to-**ZIPLink** Connector Modules that are ready for field termination, options for connecting to third party devices, GS, DuraPulse and SureServo Drives, and specialty relay, transorb and communications modules. Pre-printed I/O-specific adhesive label strips for quick marking of **ZIPLink** modules are provided with **ZIPLink** cables. See the following solutions to help determine the best **ZIPLink** system for your application.

Solution 1: Productivity Series I/O Modules to ZIPLink Connector Modules

When looking for quick and easy I/O-to-field termination, a **ZIPLink** connector module used in conjunction with a prewired **ZIPLink** cable, consisting of an I/O terminal block at one end and a multi-pin connector at the other end, is the best solution.

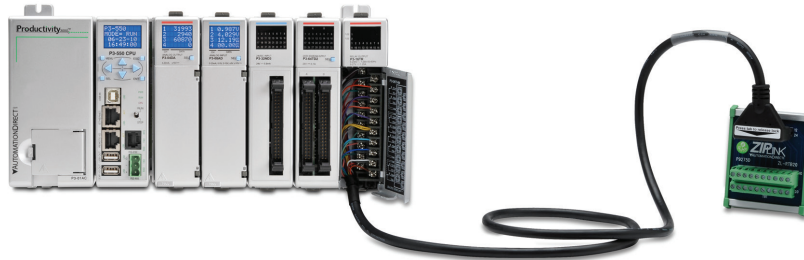


Using the PLC I/O Modules to **ZIPLink** Connector Modules selector tables located in this section,

1. Locate your I/O module/PLC.
2. Select a **ZIPLink** Module.
3. Select a corresponding **ZIPLink** Cable.

Solution 2: Productivity Series I/O Modules to ZIPLink Connector Modules

When wanting to connect I/O to another device within close proximity of the I/O modules, no extra terminal blocks are necessary when using the **ZIPLink** Pigtail Cables. **ZIPLink** Pigtail Cables are prewired to an I/O terminal block with color-coded pigtail with soldered-tip wires on the other end.

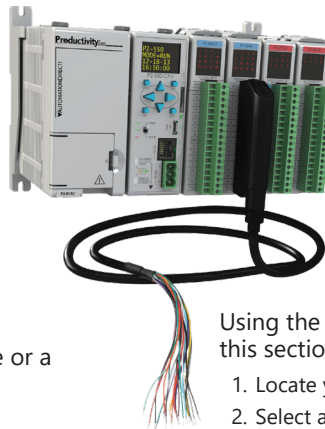

Using the I/O Modules to 3rd Party Devices selector tables located in this section,

1. Locate your PLC I/O module.
2. Select a **ZIPLink** Pigtail Cable that is compatible with your 3rd party device.

Solution 3: GS Series and DuraPulse Drives Communication Cables

Need to communicate via Modbus RTU to a drive or a network of drives?

ZIPLink cables are available in a wide range of configurations for connecting to PLCs and SureServo, SureStep, Stellar Soft Starter and AC drives. Add a **ZIPLink** communications module to quickly and easily set up a multi-device network.

Using the Drives Communication selector tables located in this section,

1. Locate your Drive and type of communications.
2. Select a **ZIPLink** cable and other associated hardware.





Wiring Solutions

Solution 4: Serial Communications Cables

ZIPLink offers communications cables for use with DirectLOGIC, CLICK, and Productivity3000 CPUs, that can also be used with other communications devices. Connections include a 6-pin RJ12 or 9-pin, 15-pin and 25-pin D-sub connectors which can be used in conjunction with the RJ12 or D-Sub Feedthrough modules.

Using the Serial Communications Cables selector table located in this section,

1. Locate your connector type
2. Select a cable.



Solution 5: Specialty ZIPLink Modules

For additional application solutions, **ZIPLink** modules are available in a variety of configurations including stand-alone relays, 24VDC and 120VAC transorb modules, D-sub and RJ12 feedthrough modules, communication port adapter and distribution modules, and SureServo 50-pin I/O interface connection.

Using the **ZIPLink** Specialty Modules selector table located in this section,

1. Locate the type of application.
2. Select a **ZIPLink** module.



Solution 6: ZIPLink Connector Modules to 3rd Party Devices

If you need a way to connect your device to terminal blocks without all that wiring time, then our pigtail cables with color-coded soldered-tip wires are a good solution. Used in conjunction with any compatible **ZIPLink** Connector Modules, a pigtail cable keeps wiring clean and easy and reduces troubleshooting time.

Using the Universal Connector Modules and Pigtail Cables table located in this section,

1. Select module type.
2. Select the number of pins.
3. Select cable.





CPU I/O Modules to ZIPLink Connector Modules - Productivity3000®

| Productivity3000 CPU Input Module ZIPLink Selector | | | | |
|--|------------|-------------|-----------------|--------------------------------------|
| CPU | | ZIPLink | | |
| Input Module | # of Terms | Component | Module Part No. | Cable Part No. |
| P3-08NAS | 20 | Feedthrough | ZL-RTB20 | ZL-P3-CBL20 * |
| P3-08ND3S | 20 | Feedthrough | | |
| P3-16NA | 20 | Feedthrough | | |
| P3-16ND3 | 20 | Feedthrough | | ZL-P3-CBL20-1L ZL-P3-CBL20-2L |
| P3-32ND3 | 40 | Feedthrough | ZL-LTB16-24-1 | |
| | | Sensor | ZL-LTB16-24-1 | |
| P3-32ND3 | 40 | Feedthrough | ZL-RTB40 | |
| | | Sensor | ZL-LTB32-24-1 | ZL-CBL40 ZL-CBL40-1 ZL-CBL40-2 |
| P3-64ND31 | 40 | Feedthrough | ZL-RTB40 | |
| | | Sensor | ZL-LTB32-24-1 | |

| Productivity3000 CPU Analog In Module ZIPLink Selector | | | | |
|--|---------------|-------------|----------|----------------------------------|
| CPU | | ZIPLink | | |
| Analog Module | # of Terms | Component | Module | Cable |
| P3-04ADS | 20 | Feedthrough | ZL-RTB20 | |
| P3-08AD | 20 | Feedthrough | | ZL-P3-CBL20 ZL-P3-CBL20-1L |
| P3-16AD-1 | 20 | Feedthrough | | |
| P3-16AD-2 | 20 | Feedthrough | | |
| P3-08RTD ² | Matched Only | See Note 2 | | |
| P3-08THM ² | T/C Wire Only | See Note 2 | | |
| P3-04DA | 20 | Feedthrough | ZL-RTB20 | |
| P3-08DA-1 | 20 | Feedthrough | | |
| P3-08DA-2 | 20 | Feedthrough | | |
| P3-16DA-1 | 20 | Feedthrough | | ZL-P3-CBL20-1L ZL-P3-CBL20-2L |
| P3-16DA-2 | 20 | Feedthrough | | |
| P3-8AD4DA-1 | 20 | Feedthrough | | |
| P3-8AD4DA-2 | 20 | Feedthrough | | |

| Productivity3000 CPU Specialty Module ZIPLink Selector | | | | |
|--|------------|-------------|-----------------|----------------------------|
| CPU | | ZIPLink | | |
| Input Module | # of Terms | Component | Module Part No. | Cable Part No. |
| P3-HSI | 40 | Feedthrough | ZL-RTB40 | ZL-CBL40-S |
| P3-HSO | | | | ZL-CBL40-1S ZL-CBL40-2S |



Note: ZIPLink Connector Modules specifications follow the Compatibility Matrix tables. ZIPLink Cables specifications are at the end of this ZIPLink section.

| Productivity3000 CPU Output Module ZIPLink Selector | | | | |
|---|------------|------------------|-----------------------|--------------------------------------|
| CPU | | ZIPLink | | |
| Output Module | # of Terms | Component | Module Part No. | Cable Part No. |
| P3-08TAS | 20 | Feedthrough | ZL-RTB20 | ZL-P3-CBL20 * |
| P3-08TD1S | 20 | Feedthrough | | |
| P3-08TD2S | 20 | Feedthrough | | ZL-P3-CBL20-1L ZL-P3-CBL20-2L |
| P3-08TRS | 20 | Feedthrough | | |
| P3-16TA | 20 | Feedthrough | ZL-RTB20 | |
| | | Fuse | | |
| P3-16TD1 | 20 | Feedthrough | | |
| | | Fuse | | ZL-RFU20 ⁴ |
| | | Relay (sinking) | | ZL-RRL16-24-1 |
| P3-16TD2 | 20 | Feedthrough | | ZL-RTB20 |
| | | Fuse | | ZL-RFU20 ⁴ |
| | | Relay (sourcing) | | ZL-RRL16-24-2 |
| P3-16TR | 20 | Feedthrough | ZL-RTB20 | |
| | | Fuse | ZL-RFU20 ⁴ | |
| P3-08TRS-1 ³ | 20 | Feedthrough | ZL-RTB20 | |
| | | Fuse | ZL-RFU20 ⁴ | |
| P3-32TD1 | 40 | Feedthrough | ZL-RTB40 | |
| | | Fuse | ZL-RFU40 ⁴ | |
| P3-32TD2 | 40 | Feedthrough | ZL-RTB40 | |
| | | Fuse | ZL-RFU40 ⁴ | ZL-CBL40 ZL-CBL40-1 ZL-CBL40-2 |
| P3-64TD1 ¹ | 40 | Feedthrough | ZL-RTB40 | |
| | | Fuse | ZL-RFU40 ⁴ | |
| P3-64TD2 ¹ | 40 | Feedthrough | ZL-RTB40 | |
| | | Fuse | ZL-RFU40 ⁴ | |

* Select the cable length by replacing the * with: Blank = 0.5m, -1 = 1.0m, or -2 = 2.0m.

1 The P3-64ND3, P3-64TD1 and P3-64TD2 modules have two 32-point connectors and require two ZIPLink cables and two ZIPLink connector modules.

2 These modules are not supported by the ZIPLink wiring system.

3 The P3-08TRS-1 output module is derated not to exceed 2A per point maximum when used with the ZIPLink wiring system.

4 Note: Fuses (5 x 20 mm) are not included. See Edison Electronic Fuse section for (5 x 20 mm) fuse. S500 and GMA electronic circuit protection for fast-acting maximum protection. S506 and GMC electronic circuit protection for time-delay performance. Ideal for inductive circuits.

To ensure proper operation, do not exceed the voltage and current rating of ZIPLink module. ZL-RFU20 = 2A per circuit; ZL-RFU40 = 400 mA per circuit.



I/O Modules

A variety of discrete, analog and specialty I/O modules are available for use in local, expansion, and remote I/O bases. Specifications for each module are on the following pages.

A filler module is available for unused I/O module slots (part number P3-FILL).

Discrete Input Modules

| Productivity3000 Discrete Input Modules | | | |
|---|------------------|------------------------------------|----------|
| Part Number | Number of Inputs | Description | Price |
| P3-16SIM | 16 | Input Simulator Module | \$197.00 |
| P3-08ND3S | 8 | Isolated Sinking/Sourcing DC Input | \$99.00 |
| P3-16ND3 | 16 | Sinking/Sourcing DC Input | \$152.00 |
| P3-32ND3 | 32 | Sinking/Sourcing DC Input | \$208.00 |
| P3-64ND3 | 64 | Sinking/Sourcing DC Input | \$260.00 |
| P3-08NAS | 8 | Isolated AC Input | \$126.00 |
| P3-16NA | 16 | AC Input | \$159.00 |

*ZIPLink required.

Analog I/O Modules

| Productivity3000 Analog Input Modules | | | |
|---------------------------------------|--------------------|---------------------------|----------|
| Part Number | Number of Channels | Description | Price |
| P3-04ADS | 4 | Isolated Analog Input | \$724.00 |
| P3-08AD | 8 | Analog Input | \$393.00 |
| P3-16AD-1 | 16 | Analog Input (Current) | \$535.00 |
| P3-16AD-2 | 16 | Analog Input (Voltage) | \$524.00 |
| P3-08RTD | 8 | Analog RTD Input | \$581.00 |
| P3-08THM | 8 | Analog Thermocouple Input | \$736.00 |

| Productivity3000 Analog Output Modules | | | |
|--|--------------------|-------------------------|----------|
| Part Number | Number of Channels | Description | Price |
| P3-04DA | 4 | Analog Output | \$449.00 |
| P3-08DA-1 | 8 | Analog Output (Current) | \$779.00 |
| P3-08DA-2 | 8 | Analog Output (Voltage) | \$725.00 |
| P3-16DA-1 | 16 | Analog Output (Current) | \$929.00 |
| P3-16DA-2 | 16 | Analog Output (Voltage) | \$911.00 |

| Productivity3000 Analog Input/Output Modules | | | |
|--|--------------------|-------------------------------|----------|
| Part Number | Number of Channels | Description | Price |
| P3-8AD4DA-1 | 8/4 | Analog Input/Output (Current) | \$598.00 |
| P3-8AD4DA-2 | 8/4 | Analog Input/Output (Voltage) | \$617.00 |

Specialty Modules

| Productivity3000 Specialty Modules | | | |
|------------------------------------|--------------------|------------------------------|----------|
| Part Number | Number of Channels | Description | Price |
| P3-HSI | 2 | High-Speed Pulse Input | \$563.00 |
| P3-HSO* | 2 | High-Speed Output | \$587.00 |
| P3-SCM | 4 ports | Serial Communications Module | \$475.00 |


*ZIPLink required.

Discrete Output Modules

| Productivity3000 Discrete Output Modules | | | |
|--|-------------------|--------------------------|----------|
| Part Number | Number of Outputs | Description | Price |
| P3-08TD1S | 8 | Isolated Sinking Output | \$135.00 |
| P3-08TD2S | 8 | Isolated Sourcing Output | \$141.00 |
| P3-16TD1 | 16 | Sinking Output | \$162.00 |
| P3-16TD2 | 16 | Sourcing Output | \$167.00 |
| P3-32TD1* | 32 | Sinking Output | \$208.00 |
| P3-32TD2* | 32 | Sourcing Output | \$208.00 |
| P3-64TD1* | *64 | Sinking Output | \$280.00 |
| P3-64TD2* | *64 | Sourcing Output | \$265.00 |
| P3-08TAS | 8 | Isolated AC Output | \$177.00 |
| P3-16TA | 16 | AC Output | \$210.00 |
| P3-08TRS | 8 | Isolated Relay Output | \$159.00 |
| P3-08TRS-1 | 8 | Isolated Relay Output | \$194.00 |
| P3-16TR | 16 | Relay Output | \$177.00 |


*ZIPLink required.

Module Installation Procedure

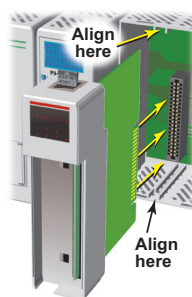


WARNING: DO NOT APPLY FIELD POWER UNTIL THE FOLLOWING STEPS ARE COMPLETED. SEE HOT-SWAPPING PROCEDURE FOR EXCEPTIONS.

Step One: Align circuit card with slot and press firmly to seat module into connector.

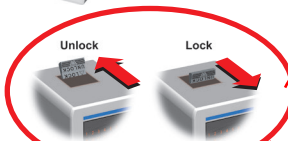

Step Two: Pull top and bottom locking tabs toward module face. Click indicates lock is engaged.

Step Three: Attach field wiring using optional terminal block or ZIPLink wiring system and install cover.

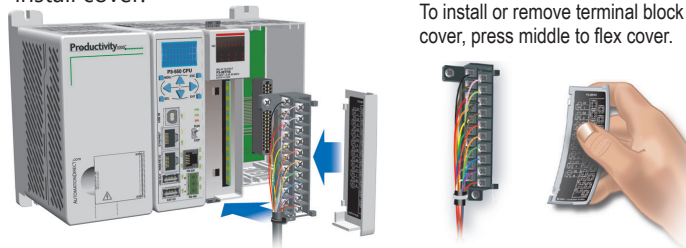

To install or remove terminal block cover, press middle to flex cover.

WARNING: EXPLOSION HAZARD – DO NOT CONNECT OR DISCONNECT CONNECTORS OR OPERATE SWITCHES WHILE CIRCUIT IS LIVE UNLESS THE AREA IS KNOWN TO BE NON-HAZARDOUS. DO NOT HOT-SWAP MODULES UNLESS THE AREA IS KNOWN TO BE NON-HAZARDOUS.