

CPU Specifications

User Memory	50MB (Includes program, data and documentation)														
Memory Type	Flash and Battery Backed RAM														
Retentive Memory	500kB														
Scan Time	500µs (3K Boolean, 240 I/O)														
Display	OLED, 4x10 characters, 8 control buttons; OLED characters are 5x7 with a dot pitch of 0.45 mm; 2.25 mm x 3.15 mm														
Communications; 5 Integrated Ports	USB IN: Programming, Monitoring, Debug, Firmware ETHERNET: (10/100Mbps Ethernet) Programming, Monitoring, Debug, Firmware, Email SMTP Client, Modbus TCP Client (32 Servers) and Server (16 Clients), EtherNet/IP Scanner (32 Adapters) and Adapter (4 scanners) with 8 connections per device. REMOTE I/O: 16 GS-EDRV100 (GS Drives), 8 Remote Base Groups RS-232: (RJ12, 1200-115.2k Baud) ASCII, Modbus RS-485: Removable Terminal Included, (1200-115.2k Baud) ASCII, Modbus RTU.														
Data Logging/Project Transfer	Micro SD card slot														
Hardware Limits of System	9 Base Groups: 1 Local (P2-550) + 8 Remote (P2-RS) 4,320 Hardware I/O points (All 32 point modules) 16 GS Series Drives as Remote I/O														
Instruction Types	<table border="0"> <tr> <td>Application Functions</td><td>PID</td></tr> <tr> <td>Array Functions</td><td>Program Control</td></tr> <tr> <td>Counters/Timers</td><td>String Functions</td></tr> <tr> <td>Communications</td><td>System Functions</td></tr> <tr> <td>Data Handling</td><td>Contacts</td></tr> <tr> <td>Drum Sequencers</td><td>Coils</td></tr> <tr> <td>Math Functions</td><td></td></tr> </table>	Application Functions	PID	Array Functions	Program Control	Counters/Timers	String Functions	Communications	System Functions	Data Handling	Contacts	Drum Sequencers	Coils	Math Functions	
Application Functions	PID														
Array Functions	Program Control														
Counters/Timers	String Functions														
Communications	System Functions														
Data Handling	Contacts														
Drum Sequencers	Coils														
Math Functions															
Real Time Clock Accuracy	±5s per day typical at 25°C ±15s per day maximum at 60°C														

Document Name	Edition/Revision	Date
P2-550-DS	1st Ed. Rev A	2/5/2016

Copyright 2016, AutomationDirect.com Incorporated/All Rights Reserved Worldwide.





P2-550 CPU


The P2-550 is a full-featured, high-performance CPU for use with the Productivity2000 system.

CPU Specifications	1
CPU Front and Bottom Panels	2
CPU Installation Procedure	2
Battery Installation Procedure	3
Micro SD Specifications	3
RS-232 Port Specifications	4
RS-485 Port Specifications	4
Ethernet Port Specifications	5
Remote I/O Port Specifications	5
USB In Port Specifications	5
Front Panel OLED Message Display	6
Front Panel OLED Display Monitoring and Configuration	7
Warning	8
CPU Status Indicators	8
CPU Run/Stop Switch Specifications	8
General Specifications	8
Hot Swap Information	8


Warranty: Thirty-day money-back guarantee. Two-year limited replacement. (See www.productivity2000.com for details).

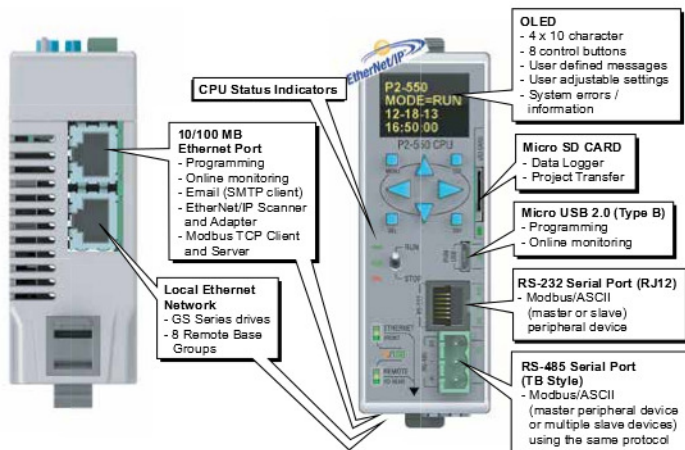

Step One:
Unlock both locking tabs

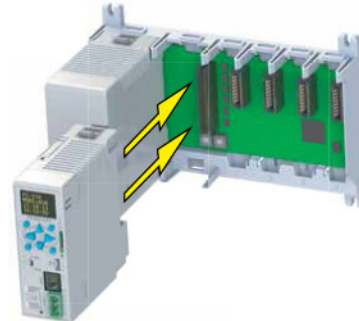

Step Two:
Seat CPU on support platform and push towards base until circuit board is fully engaged into connector



Step Three:
Snap retaining tab into the locked position.

Battery Installation Procedure

Step One:

Press spring lock and swing battery compartment away from CPU.



Step Two:

Insert battery and close compartment.




Take care to insert battery behind metal tab.

Battery Optional

D2-BAT-1	Coin type, 3.0 V Lithium battery, 560mA, battery number CR2354
Note: Although not needed for program backup, an uninstalled battery is included with the P2-550. Install this battery if you want the CPU to retain the Time and Date along with any Tagname values that you have set up as retentive.	

Micro SD Specifications


Port Name	MICRO SD			
Description	Standard Micro SD socket for data logging or program transfer			
Maximum Card Capacity	32GB			
Transfer Rate (ADATA microSDHC Class 4 memory card)	Mbps	Minimum	Typical	Maximum
	Read	14.3	14.4	14.6
	Write	4.8	4.9	5.1
Port Status LED	Green LED is illuminated when card is inserted/detected			



Pin	SD
1	DAT2
2	CD/DAT3
3	CMD
4	VDD
5	CLK
6	VSS
7	DAT0
8	DAT1


Note: Card not included with unit.

RS-232 Specifications	
Port Name	RS-232
Description	Non-isolated RS-232 DTE port connects the CPU as a Modbus/ASCII master or slave to a peripheral device. Includes ESD and built-in surge protection
Data Rates	Selectable, 1200, 2400, 4800, 9600, 19200, 33600, 38400, 57600, and 115200
+5V Cable Power Source	210 mA maximum at 5V, ± 5%. Reverse polarity and overload protected
TXD	RS-232 Transmit output
RXD	RS-232 Receive input
RTS	Handshaking output for modem control
GND	Logic ground
Maximum Output Load (TXD/RTS)	3kΩ 1000 pf
Minimum Output Voltage Swing	±5V
Output Short Circuit Protection	±15mA
Port Status LED	Green LED is illuminated when active for TXD, RXD and RTS
Cable Options	EA-MG-PGM-CBL D2-DSCBL USB-RS232 with D2-DSCBL FA-CABKIT FA-ISOCAN for converting RS-232 to isolated RS-485



Pin #	Signal	
6	GND	Logic Ground
5	RTS	RS-232 Output
4	TXD	RS-232 Output
3	RXD	RS-232 Input
2	+5V	210mA Maximum
1	GND	Logic Ground

RS-485 Port Specifications	
Port Name	RS-485
Description	Non-isolated RS-485 port connects the CPU as a Modbus/ASCII master or slave to a peripheral device. Includes ESD/EFT protection and automatic echo cancellation when transmitter is active
Data Rates	Selectable, 1200, 2400, 4800, 9600, 19200, 33600, 38400, 57600, and 115200
TXD+/RXD+	RS-485 transceiver high
TXD-/RXD-	RS-485 transceiver low
GND	Logic ground
Input Impedance	19kΩ
Maximum Load	50 transceivers, 19 kΩeach, 60 Ω termination
Output Short Circuit Protection	±250mA, thermal shut-down protection
Electrostatic Discharge Protection	±8KV per IEC1000-4-2
Electrical Fast Transient Protection	±2KV per IEC1000-4-4
Minimum Differential Output Voltage	1.5 V with 60Ωload
Fail Safe Inputs	Logic high input state if inputs are unconnected
Maximum Common Mode Voltage	-7.5 V to 12.5
Port Status LED	Green LED illuminated when active for TXD and RXD
Cable Options	Recommend L19827-XXX from AutomationDirect.com


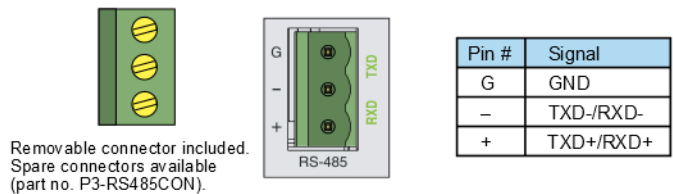


Pin #	Signal
G	GND
-	TXD-/RXD-
+	TXD+/RXD+

Port Specifications

Ethernet Specifications		
Port Name	ETHERNET	REMOTE I/O
Description	Standard transformer isolated Ethernet port with built-in surge protection for programming, online monitoring, Email (SMTP client), Modbus/TCP client/server connections (fixed IP or DHCP) and Ethernet/IP Scanner/ Apapter connections.	Standard transformer isolated Ethernet port with built-in surge protection for connection to 16 GS Series Drives and 8 Remote Base Groups.
Transfer Rate	10 Mbps (Orange LED) and 100 Mbps (Green LED) (auto-crossover)	
Port Status LED	LED is solid when network LINK is established. LED flashes when port is active (ACT).	

Micro USB Type B Slave Input Specifications	
Port Name	MICRO USB
Description	Standard Micro USB Slave input for programming and online monitoring, with built-in surge protection. Not compatible with older full speed USB devices.
Transfer Rate	480Mbps
Port Status LED	Green LED is illuminated when LINK is established to programming software.
Cables	USB Type A to Micro USB Type B: 6ft. cable part # USB-CBL-AMICB6 15ft. cable part # USB-CBL-AMICB15

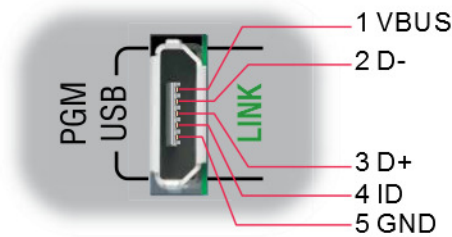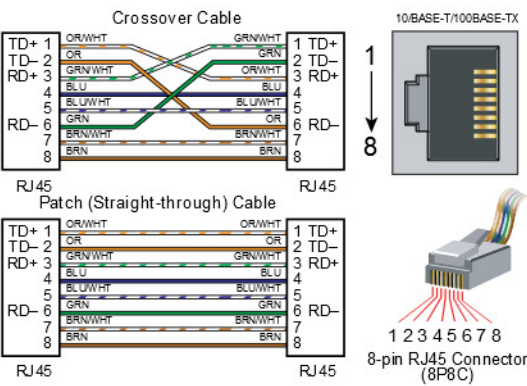




The CPU incorporates a 4 line x 10 character OLED for system errors and information or for displaying user-defined messages.

OLED characters are 7x12 with a dot pitch of 0.245 mm; 1.72 mm x 2.94 mm.

OLED control buttons located beneath the display allow the user to navigate through a menu and arrow buttons allow for configuration of time and date settings.

Note: There is a built in time-out for the OLED of 4 hours. Only a button press or power up will turn it back on.

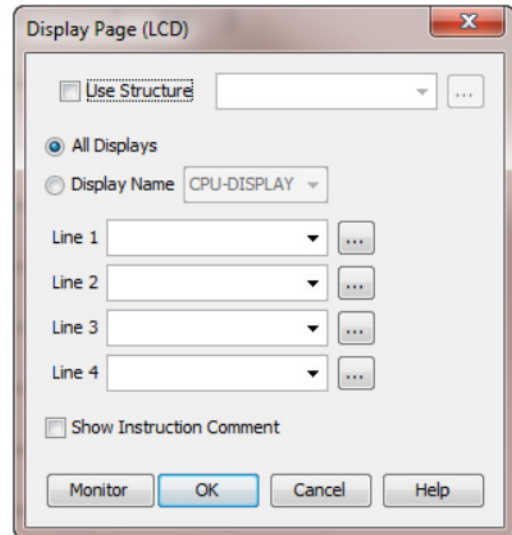






For user-defined messages, the display is configured using the Productivity2000 Programming Software. An OLED Page instruction allows the user to program text into user-defined tags and display the messages based on the ladder execution.

FRONT PANEL OLED DISPLAY MONITORING AND CONFIGURATION



Hold MENU button to display menu options.
Use down arrow key to scroll through options.

Press SEL
button to select
a menu option.



Steps For Using Monitor Menu		Data Type Monitor / Edit Availability			
Step 1.)	Select User Data or I/O Data and press ENT	C	BCD16	SWRW	STR AIS32
Step 2.)	Select Data Type and Press ENT	SBR	US16	S32	SSTR AOS32
Step 3.)	Press ENT to Edit System ID, or when finished press ENT	SBRW	S16	BCD32	DI AIF32
Step 4.)	Press SEL to monitor the value	SWR	F32	DO	ADF32

OLED CONTROL BUTTONS

Menu Button	Access the OLED menu
ESC Button	Returns to the previous screen
SEL Button	Selects the desired menu option
ENT Button	Starts the selected process
Directional Arrows	Moves the cursor around the 4 Row x 10 Column OLED

With YES selected,
OLED will go directly to
M3: MONITOR display
upon power up.

WARNING: To minimize the risk of potential safety problems, you should follow all applicable local and national codes that regulate the installation and operation of your equipment. These codes vary from area to area and it is your responsibility to determine which codes should be followed, and to verify that the equipment, installation, and operation are in compliance with the latest revision of these codes.

Equipment damage or serious injury to personnel can result from the failure to follow all applicable codes and standards. We do not guarantee the products described in this publication are suitable for your particular application, nor do we assume any responsibility for your product design, installation, or operation.

If you have any questions concerning the installation or operation of this equipment, or if you need additional information, please call Technical Support at 770-844-4200.

This publication is based on information that was available at the time it was printed. At AutomationDirect.com® we constantly strive to improve our products and services, so we reserve the right to make changes to the products and/or publications at any time without notice and without any obligation. This publication may also discuss features that may not be available in certain revisions of the product.

CPU Status Indicators

PWR	Green LED is illuminated when power is ON
RUN	Green LED is illuminated when CPU is in RUN mode
CPU	Red LED is illuminated during power ON reset, power down, or watch-dog time-out



Removable Terminal Block Specifications

Part Number	P3-RS485CON
Number of Positions	3 Screw Terminals
Pitch	5mm
Wire Range	28-12 AWG Solid Conductor 30-12 AWG Stranded Conductor
Screw Driver Width	1/8 inch (3.175 mm) Maximum
Screw Size	M2.5
Screw Torque	4.5 lb-in (0.51 N-m)

General Specifications

Operating Temperature	0° to 60°C (32° to 140°F)
Storage Temperature	-20° to 70°C (-4° to 158°F)
Humidity	5 to 95% (non-condensing)
Environmental Air	No corrosive gases permitted
Vibration	IEC60068-2-6 (Test Fc)
Shock	IEC60068-2-27 (Test Ea)
Heat Dissipation	3.81 W
Enclosure Type	Open Equipment
Agency Approvals	UL508 file E139594, Canada & USA CE (EN61131-2*)
Module Location	Controller slot in the local base in a Productivity2000 System
EU Directive	See the "EU Directive" topic in the Productivity Suite Help File. Information can also be obtained at: www.productivity2000.com
Weight	158g (5.6 oz)

*Meets EMC and Safety requirements. See the D.O.C. for details.

IMPORTANT!



Hot-Swapping Information

Note: This device cannot be Hot Swapped.

CPU RUN/STOP SWITCH Specifications

RUN position	Executes user program, run-time edits possible
STOP position	Does not execute user program, normal program load position