



PLC Programming Cables

Pin labeling conforms to IBM DTE and DCE standards


D2-DSCBL <--->

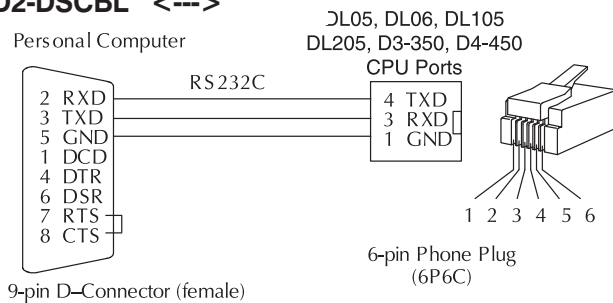


D2-DSCBL-1 <--->

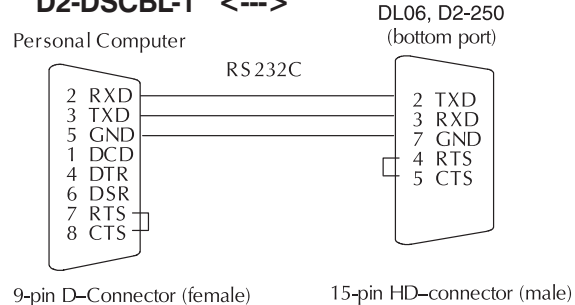


D3-DSCBL-1 <--->

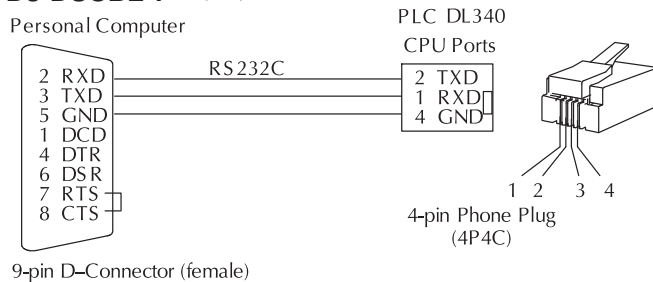


D3-DSCBL-2 <--->

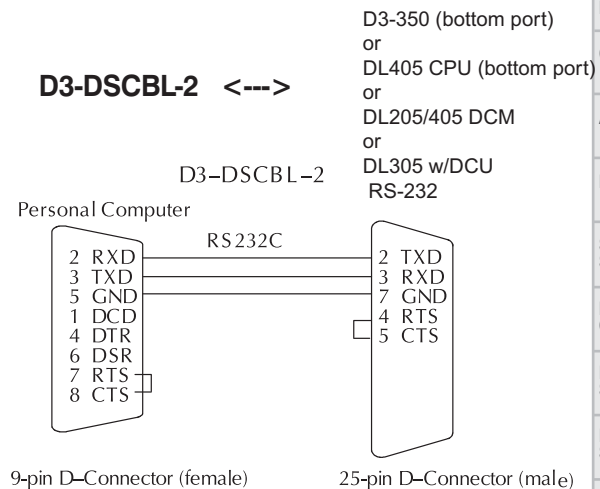



D4-DSCBL <--->

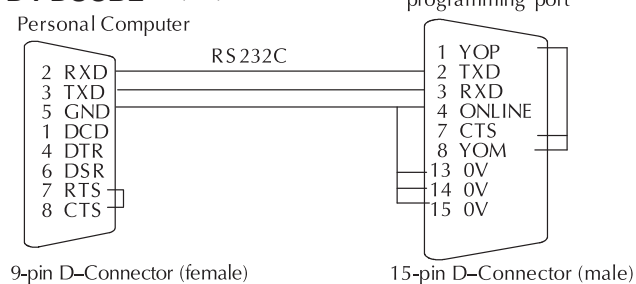

Straight-through Patch Cable (Ethernet)

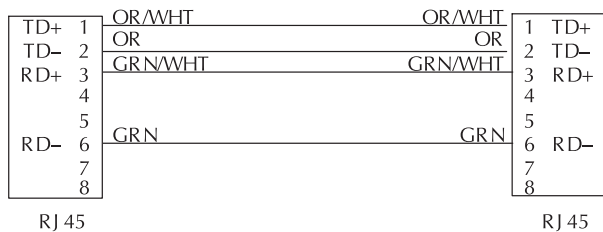

Crossover Cable (Ethernet)

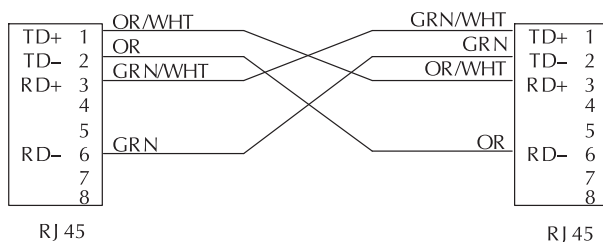

All Ethernet and ECOM patch cables should be Category 5, UTP Cable. The diagram illustrates the appropriate wire position in the RJ 45 connector.