



# Fan Heaters for Enclosures, Foot Mounted

## Applications

The fan heaters are designed to prevent the formation of condensation and ensure an evenly distributed interior air temperature in enclosures. These fan heaters include an integrated thermostat for temperature control. These models were designed as a stationary unit to be mounted on the bottom of the enclosure.

## Features

- Compact fan heater
- Quiet operation
- Integrated adjustable thermostat
- Built-in overheat protection
- Double insulated plastic housing



030599-00



030609-00

| Part Number | Price | Weight (approx.) |
|-------------|-------|------------------|
| 030599-00   | <-->  | 3.1 lbs (1.4 kg) |
| 030609-00   | <-->  | 2.6 lbs (1.2 kg) |


| Fan Heaters (Foot Mounted) Specifications |   |  |
|---|---|--|
| Model                                     | 030599-00   | 030609-00  |
| Heating Element                           | High-performance cartridge  | PTC Resistor - Temperature limiting                |
| Thermostat Range                          | 32° to 140°F  |  |
| Heating Capacity <sup>1</sup>             | 950W  | 1200W  |
| Max. Current                              | 8.0A cont.  | 16.0A inrush                                       |
| Operating Voltage                         | 100-120 VAC, 50/60 Hz   |  |
| Air Flow (Free blowing)                   | 94 cfm (160 m <sup>3</sup> /h)  |  |
| Axial Fan, Ball Bearing                   | Service life 50,000 h at 77°F (25°C)  |  |
| Connection                                | 2-pole terminal 14 AWG max. (2.5 mm <sup>2</sup> ), with strain relief, clamping torque 0.8 Nm max. |  |
| Housing                                   | Plastic, UL 94V-0, black  |  |
| Mounting                                  | M5 screws (not included)  |  |
| Mounting Position                         | Floor (exhaust up)  |  |
| Recommended Mounting Distance             | 1.97 in. (50 mm) sides and bottom 3.94 in. (100 mm) above   |  |
| Operating/Storage Temperature             | -49° to 158°F (-45° to 70°C)  |  |
| Protection Class                          | II (double insulated)   |  |
| Protection Type                           | IP20  |  |
| Approvals                                 | CE, UL Recognized File No. E234324, RoHS compliant  | CE, UL Recognized File No. E150057, RoHS compliant |

<sup>1</sup> At 68°F (20°C) ambient temperature

## Dimensions:


### 030599-00

Inches [mm]

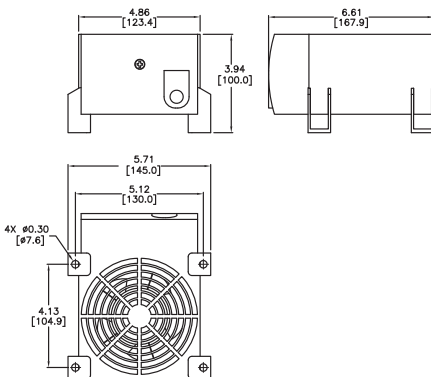


### 030609-00

Inches [mm]

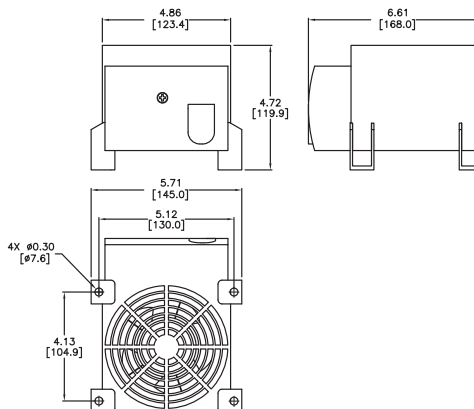

## Wiring Diagram



# Industrial strength heating options for your enclosure from AutomationDirect

## Thermostats

- Compact design
- Fixed set point or wide adjustment ranges
- Color coded modules and temperature dials
- N.C. / N.O. in one unit (Part Numbers 011630-00, 011640-00, 011720-00 and 011720-01)
- Separate adjustable temperatures (Part Numbers 011720-00 and 011720-01)
- 35mm DIN rail mounting
- CE, UL Recognized, RoHS compliant



## Hygrostats and Hygrotherms

Electronic hygrostats sense the relative humidity in an enclosure and turn on a heater at the setpoint to prevent the formation of condensation in the enclosure.

Electronic hygrotherms sense the ambient temperature and relative air humidity to turn a connected device on or off according to setpoints.



## Heaters

- Compact design
- Quiet operation
- Low surface temperatures (convection heaters)
- Double insulated protection
- 35mm DIN rail and panel mounting options
- CE, UL Recognized, RoHS compliant



# Enclosure Heating and Heater Selection

## Why Heat an Enclosure?

Today's miniaturization of enclosure components results in high packing densities, which in turn results in higher temperatures within the enclosure. These high temperatures are harmful to electronic components. In response, cooling systems have become standard in many applications. However, just as critical and widely underestimated, are failures caused by the formation of moisture.

Under certain climatic conditions, moisture can build up not only in outdoor or poorly insulated enclosures, but also in highly protected and well-sealed enclosures.

## Moisture and Failure

Moisture, especially when combined with aggressive gases and dust, causes atmospheric corrosion and can result in the failure of components such as circuit breakers, busbars, relays, integrated circuit boards and transformers. The greatest danger lies in conditions where electronic equipment is exposed to relatively high air humidity or extreme variations in temperature, such as day-and-night operation or outdoor installation. Failure of components in such cases is usually caused by changing contact resistances, flashovers, creepage currents or reduced insulation properties.

## Eliminate Moisture

Moisture and corrosion will remain low if relative air humidity stays below 60%. However, relative humidity above 65% will significantly increase moisture and corrosion problems. This can be prevented by keeping the environment inside an enclosure at a temperature as little as 9°F (5°C) higher than that of the ambient air. Constant temperatures are a necessity to guarantee optimal operating conditions. Continuous temperature changes not only create condensation but they reduce the life expectancy of electronic components significantly. Electronic components can be protected by cooling during the day and heating at night.

## Thermal Management

Modern enclosure heaters are designed to protect against condensation. They heat the air inside enclosures, preventing water vapor from condensing on components while providing the greatest possible air circulation and low energy consumption.

Other heating element technology improvements include:

- Longer operating life
- Greater energy efficiencies
- Quick wiring options
- Easier mounting

## Heater Location

Ideally, most heaters will perform optimally when mounted near the bottom of an enclosure and used in conjunction with a separate controller such as a thermostat and/or hygostat. With the controller located in an area of the cabinet that is representative of the average temperature or humidity requirement, the heater should then be placed in a position near the bottom but not directly beneath the controller. This placement will ensure that the controller is not influenced by direct heat from the heater.

## Heater Calculation

Follow Steps 1-5 to determine the heating requirement of an enclosure (US units - left column, metric - right)

**STEP 1: Determine the Surface Area (A) of your enclosure which is exposed to open air.**

**Enclosure Dimensions:**

height = \_\_\_\_\_ feet      \_\_\_\_\_ meters

width = \_\_\_\_\_ feet      \_\_\_\_\_ meters

depth = \_\_\_\_\_ feet      \_\_\_\_\_ meters

Choose Mounting Option from next page, and calculate the surface area as indicated

$$A = \text{_____ ft}^2 \text{ or } \text{_____ m}^2$$

**STEP 2: Choose the Heat Transmission Coefficient (k) for your enclosure's material of construction.**

painted steel = 0.511 W/(ft<sup>2</sup>•K)      5.5 W/(m<sup>2</sup>•K)

stainless steel = 0.344 W/(ft<sup>2</sup>•K)      3.7 W/(m<sup>2</sup>•K)

aluminum = 1.115 W/(ft<sup>2</sup>•K)      12 W/(m<sup>2</sup>•K)

plastic or insulated stainless = 0.325 W/(ft<sup>2</sup>•K)      3.5 W/(m<sup>2</sup>•K)

$$k = \text{_____ W/(ft}^2 \cdot \text{K)} \text{ or } \text{_____ W/(m}^2 \cdot \text{K)}$$

**STEP 3: Determine the Temperature Differential (ΔT).**

A. Desired enclosure interior temp. = \_\_\_\_\_ °F      \_\_\_\_\_ °C

B. Lowest ambient (outside) temp. = \_\_\_\_\_ °F      \_\_\_\_\_ °C

Subtract B from A = Temp. diff. (ΔT) = \_\_\_\_\_ °F      \_\_\_\_\_ °C

For these calculations, ΔT must be in degrees Kelvin (K).

Therefore, divide ΔT (°F) by 1.8. ΔT = \_\_\_\_\_ K

**STEP 4: Determine Heating Power (P<sub>V</sub>), if any (generated from existing components, i.e. transformer).**

$$P_V = \text{_____ W} \text{ or } \text{_____ W}$$

**STEP 5: Calculate the Required Heating Power (P<sub>H</sub>) for your enclosure based on the above values.**

If enclosure is located inside:


$$P_H = (A \times k \times \Delta T) - P_V = \text{_____ W}$$

If enclosure is located outside:


$$P_H = 2 \times (A \times k \times \Delta T) - P_V = \text{_____ W}$$

# Enclosure Mounting Types and Surface Area Calculations


## 1. Free-Standing



$$\text{Area (A)} = 1.8 (H \times W) + 1.8 (H \times D) + 1.8 (W \times D)$$




$$\text{Area (A)} = 1.8 (H \times W) + 1.4 (H \times D) + 1.8 (W \times D)$$




$$\text{Area (A)} = 1.8 (H \times W) + (H \times D) + 1.8 (W \times D)$$


## 2. Wall-Mounted



$$\text{Area (A)} = 1.4 (H \times W) + 1.8 (H \times D) + 1.8 (W \times D)$$




$$\text{Area (A)} = 1.4 (H \times W) + 1.4 (H \times D) + 1.8 (W \times D)$$

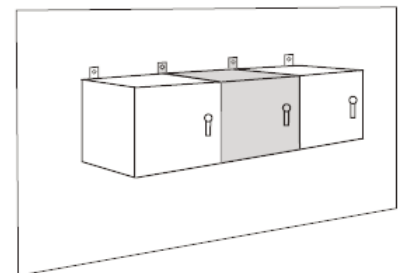


$$\text{Area (A)} = 1.4 (H \times W) + (H \times D) + 1.8 (W \times D)$$


## 3. Ground

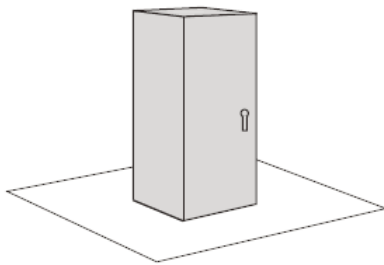

$$\text{Area (A)} = 1.8 (H \times W) + 1.8 (H \times D) + 1.4 (W \times D)$$

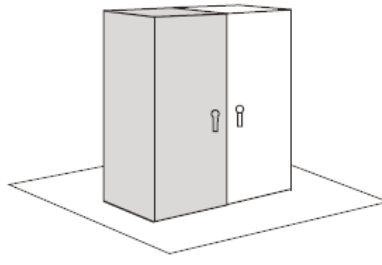


$$\text{Area (A)} = 1.8 (H \times W) + 1.4 (H \times D) + 1.4 (W \times D)$$

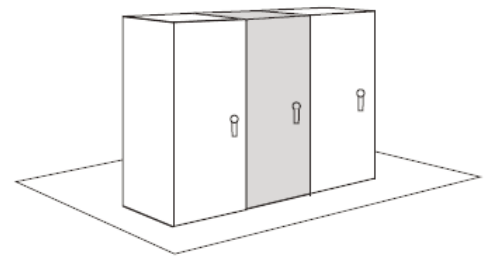


$$\text{Area (A)} = 1.8 (H \times W) + (H \times D) + 1.4 (W \times D)$$


## 4. Ground and Wall



$$\text{Area (A)} = 1.4 (H \times W) + 1.8 (H \times D) + 1.4 (W \times D)$$



$$\text{Area (A)} = 1.4 (H \times W) + 1.4 (H \times D) + 1.4 (W \times D)$$

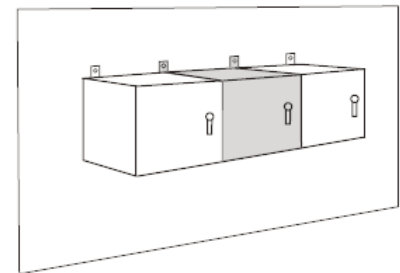

$$\text{Area (A)} = 1.4 (H \times W) + (H \times D) + 1.4 (W \times D)$$