


Proximity Sensors

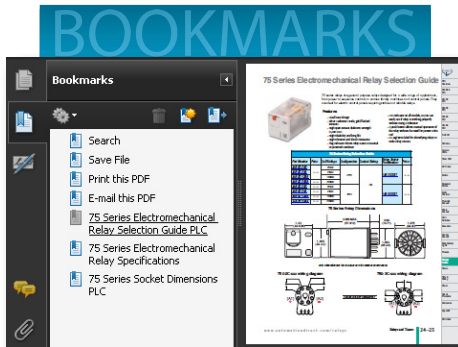

In this interactive PDF you can:

- Use bookmarks to navigate by product category
- Use bookmarks to save, search, print or e-mail the catalog section
- Click on part #s to link directly to our online store for current pricing, specs, stocking information and more

Up-to-date price list:
www.automationdirect.com/pricelist

FREE Technical Support:
www.automationdirect.com/support

FREE Videos:
www.automationdirect.com/videos


FREE Documentation:
www.automationdirect.com/documentation

FREE CAD drawings:
www.automationdirect.com/cad



Name Brand Quality at an AutomationDirect Price

See the quality for yourself

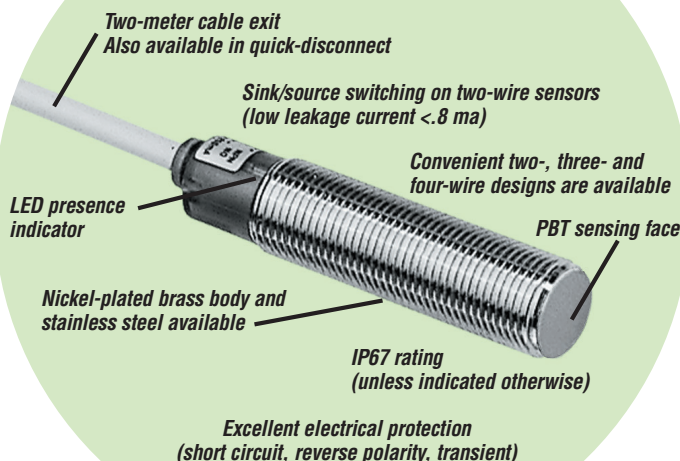

30-day money-back guarantee

Why buy a proximity sensor from AutomationDirect?

A sensor may only cost \$13.50, but it may be responsible for millions of dollars worth of product for you or your customer. That is why AUTOMATIONDIRECT only works with world class manufacturing companies that have been in the industry for decades, and operate in hundreds of thousands of installations around the world. Our customers can rest easy knowing we work with the best.

All of our sensors are certified by CE to ensure the highest quality, and most are certified by UL and CSA. Here are a few examples of how serious we are when it comes to design and manufacturing quality:

- Every proximity sensor is tested five times during the manufacturing process to ensure out of the box operation.
- Most proximity and photoelectric sensors are heat cycled from -25°C to 55°C for eight hours to eliminate startup failures.

What's the difference? Better price!

\$19.75

Ours

PNK6-AN-3A
18 mm DC 2 m cable

\$90.48

Theirs

Allen-Bradley
872C-DH5NN18-E2
18 mm DC 2 m cable

- A vacuum of 30 mBar is pulled in the resin filling process of every proximity sensor to eliminate air bubbles which may form in the epoxy and cause long-term maintenance problems or short-term failures.
- Every proximity sensor has a resistor that is laser trimmed to .001 inches to ensure repeatable and accurate detection and provide you better product stability.

• Our sensor suppliers manufacture the printed circuit board (PCB), populate the PCB with components, and assemble and test the product from start to finish to ensure the highest quality.

But actions speak louder than words. That's why we back every sensor with a 30-day, money-back guarantee, and all proximity sensors carry a limited lifetime warranty. All this results in a return rate that is near zero.

Proximity Sensors	AutomationDirect Price/Part Number	VS.	Allen-Bradley Price/Part Number	
5 mm three-wire DC prox with pico Q/D	\$41.00 PD1-AP-1F		\$165.28 871C-D1NP5-P3	
8 mm three-wire DC prox with pico Q/D	\$21.00 AE1-AN-2F		\$100.29 872C-D3NN8-P3	
12 mm two-wire DC shielded prox with 2 m cable	\$22.00 AM1-A0-2A		\$87.11 872C-D3NE12-A2	
18 mm shielded AC prox with 2 m cable	\$31.00 VK1-A0-1B		\$121.67 872C-A5N18-A2	

Q/D = quick disconnect

*All prices are U.S. published prices. AutomationDirect prices as of 4/27/2016 Allen-Bradley prices are taken from www.wemerelectric.com 4/18/2016. Prices may vary by dealer. Many other part numbers are available from all vendors.

Round Proximity Sensors For All Applications

All the features you expect

These proximity sensors provide benefits to our customers on everything from price to quality:

- **Super low prices compared to the competition.** This allows OEM-like pricing on single item purchases. In fact, some of our sensors are actually cheaper than competitors' cables.
- **2-wire designs on the most popular models.** This makes for easier and faster terminations (i.e., one less wire to terminate). Faster wiring time and fewer termination points (materials) result in lower system costs. This technology works with sinking or sourcing devices, eliminating the need for multiple sensors, since one sensor works both ways.
- **Most sensors are available in quick-disconnect cable versions.** Proximity sensors are subject to physical damage from machine overtravel, etc. and quick-disconnect sensors make for fast and easy replacement. Also, troubleshooting is much faster with quick-disconnect devices, as the user need only unscrew the connector and change out the sensor. This eliminates the need for disconnecting wires and cutting wire ties, and speeds up the replacement process with much less room for error.
- **Food and Beverage sensors available.** IP69K rated, stainless steel, made of FDA approved materials able to withstand 1500psi of 80°C water jet at varying angles, 4-6" away



What do 2-, 3- or 4-wire outputs mean to me?

Benefits	
2-wire	<ul style="list-style-type: none"> • Will work with sinking or sourcing devices • Only 2 wires to terminate
3-wire	<ul style="list-style-type: none"> • Most popular output - familiar to most users • Must select between NPN and PNP outputs
4-wire	<ul style="list-style-type: none"> • Allows configurability in one device • May have both NPN/PNP selection or NO/NC selection. Allows user to stock one part for numerous applications.

- **Shielded or unshielded sensors are available for mounting variations.** Shielded versions allow flush mounting, but limit the target detection range, while unshielded versions do not allow flush mounting, but offer greater sensing distance and area.
- **All sensors feature electrical protection for short circuit, reverse polarity, and transient noise.** Whether the sensor is initially wired wrong, or wired into a noisy environment, it will still operate properly.
- **A lifetime warranty means you can install your proximity sensor and be assured of its quality and endurance.**

Sometimes a round proximity sensor will not fit a square hole

Rectangular sensors are the answer

Have you ever tried using a round sensor or short body sensor, and not been able to make it fit? We offer rectangular sensors to meet your needs. The same technology found in our standard round proximity sensor is put into a rectangular housing, including sensing distances, electrical protection and switching frequencies.

We currently offer the most popular formats available.




Extended and Triple-sensing Distances for Tough-to-reach Applications

8 mm and 12 mm triple-sensing distance sensors

Why extended distance?

In many applications, it might not be possible to mount a sensor close to the sensed object. In those cases, longer sensing distances are needed. For instance:

- Longer sensing distances may eliminate the need to buy more expensive high temperature sensors. If a sensor is placed too close to a hot temperature source, the sensor will fail quicker and require more maintenance.
- Mounting the sensor further from the detection object may eliminate unneeded contact with the sensor, which will extend the life of the sensor.

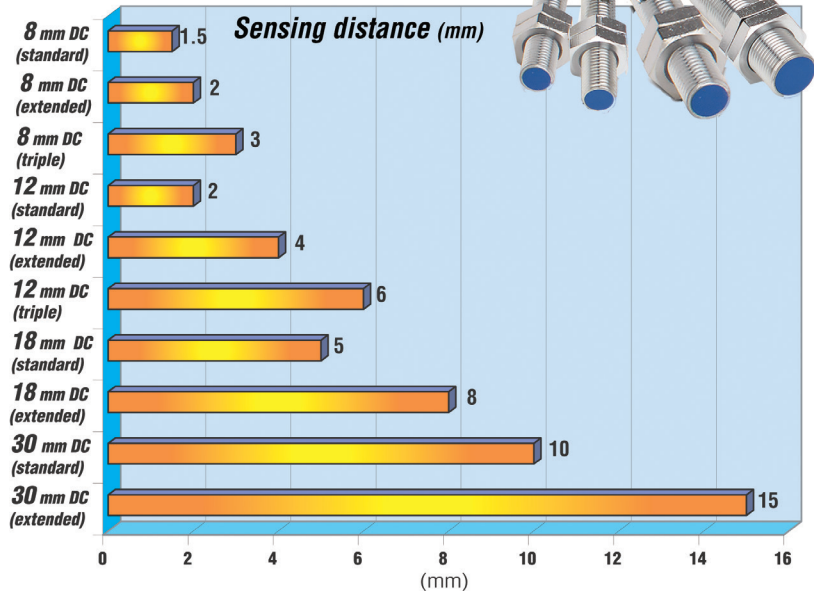

Stainless Steel Triple-sensing Proximity Sensors

IP68 rated:
to 290 psi or 669 ft. of water

With a unique sensing technology, this IP68 rated sensor (embedded cable version only) can be mounted under water up to 290 psi (or 669 feet of water). It will last a lifetime and pay for itself over and over again. This technology has many benefits:

Triple sensing

This sensor offers three times the sensing distance of any standard proximity sensor for tremendous flexibility in your design.

Virtually the same sensing distance for all metals

Sense iron, aluminum, brass, etc., all at the sensor-rated distance. Have you ever chosen a sensor with 10 mm sensing distance and had to reduce it to 2 mm or less because you were sensing an aluminum object? With this sensor, you can design the installation to use the entire 10 mm sensing distance.

One-piece stainless steel body

The sensing technology allows object detection through stainless steel material. The sensor can be located in the harshest conditions, including oil or water submersion up to 290 psi (20 bars).



One-piece stainless steel body



Three-wire DC

12 mm
PMW
series

18 mm
PKW
series

30 mm
PTW
series



We sell good proximity sensors at great prices – and we back them up!

AutomationDirect Lifetime Warranty

For inductive proximity sensors sold to the Original User for the lifetime of the original application.

The following terms apply to the LIFETIME WARRANTY in addition to the General Terms:

1. This warranty is available only to AUTOMATIONDIRECT's authorized Value Added Resellers and to the Original User. In the event the ownership of the product is transferred to a person, firm, or corporation other than the Original User, this WARRANTY shall terminate.
2. This WARRANTY is applicable only to the original installation of the product. In the event the machinery, equipment, or production line to which the product is connected, or on which it is installed, is substituted, changed, moved or replaced, the WARRANTY shall terminate.
3. This WARRANTY shall be valid only if the product was purchased by the Original User from AUTOMATIONDIRECT, or from an authorized AUTOMATIONDIRECT Value Added Reseller, or was an integral part of a piece of machinery and equipment obtained by the Original User from an original equipment manufacturer, where the part was purchased by the original equipment manufacturer directly from AUTOMATIONDIRECT or from an authorized AUTOMATIONDIRECT Value Added Reseller.

Purchaser's remedies

This remedy shall apply to all WARRANTIES. If an AUTOMATIONDIRECT Value Added Reseller desires to make a WARRANTY claim, the Value Added Reseller shall, if requested by AUTOMATIONDIRECT, ship the product to AUTOMATIONDIRECT's facility in Cumming, GA postage or freight prepaid. If the Original User desires to make a WARRANTY Claim, they shall notify the authorized Value Added Reseller from whom it was purchased or, if purchased directly from AUTOMATIONDIRECT, shall notify AUTOMATIONDIRECT and, if requested by AUTOMATIONDIRECT, ship the Product to AUTOMATIONDIRECT's facility in Cumming, GA postage or freight prepaid. AUTOMATIONDIRECT shall, at its option, take any of the following two courses of action for any products which AUTOMATIONDIRECT determines are defective in materials or workmanship.

1. Repair or replace the product and ship the product to the Original User or to the authorized AUTOMATIONDIRECT Value Added Reseller, postage or freight prepaid; or
- 2.-Repay to the Original User that price paid by the Original User; provided that if the claim is made under the lifetime warranty, and such product is not then being supplied by AUTOMATIONDIRECT, then the amount to be repaid by AUTOMATIONDIRECT to the Original User shall be reduced according to the following schedule:

Number of Years Since Date of Purchase by Original User	Percent of Original Purchase Price To Be Paid by AutomationDirect
10	50 percent
15	25 percent
20	10 percent
More than 20	5 percent

REMEDIES OF PURCHASER'S AND VALUE ADDED RESELLERS SHALL BE LIMITED EXCLUSIVELY TO THE RIGHT OF REPLACEMENT, REPAIR OR REPAYMENT AS PROVIDED ABOVE AND DOES NOT INCLUDE ANY LABOR COST OR REPLACEMENT AT ORIGINAL USER'S SITE. AUTOMATIONDIRECT.COM SHALL NOT BE LIABLE FOR ANY CONSEQUENTIAL DAMAGES RESULTING FROM ANY BREACH OF ANY WARRANTY, EXPRESSED OR IMPLIED, APPLICABLE TO THE PRODUCT, INCLUDING WITHOUT LIMITATION, ANY DAMAGES RESULTING FROM PROPERTY DAMAGE, PERSONAL INJURY OR BUSINESS INTERRUPTION, EVEN IF NOTIFIED OF THE POSSIBILITY OF SUCH DAMAGES.

Proximity Sensor Lineup

Proximity sensors allow non-contact detection of objects. They are used in many industries, including manufacturing, robotics, semiconductor, etc. Inductive sensors detect metallic objects while capacitive sensors detect all other materials. Ultrasonic sensors detect all materials by using sound wave reflections to determine presence.



LIFETIME WARRANTY

STAINLESS STEEL



Miniature (3, 4, 5 mm)

Starting from \$41.00

PY and PD SERIES

Three-wire DC

3 mm prox, from \$65.00

4 mm prox, from \$22.50

5 mm prox, from \$41.00 (quick-disconnect)

Sensing distance:

- **Standard**
- **Extended**

18 mm round

Starting from \$14.00

AK, PBK and PNK SERIES

Two- and three-wire DC, standard or harsh duty, embedded cable or M12 quick-disconnect

Sensing distance:

- **Standard**, from \$14.00
- **Extended**, from \$26.50

8 mm x 8 mm rectangular

Starting from \$25.00

CR8 SERIES

Three-wire DC with embedded cable or M8 quick-disconnect

Sensing distance:

- **Standard**, from \$25.00
- **Extended**, from \$34.50
- **Triple**, from \$77.00

5 mm x 5 mm rectangular

Starting from \$36.00

CR5 SERIES

Three-wire DC, IP67 rating, embedded cable or M8 quick-disconnect

Sensing distance:

- **Standard**, from \$36.00
- **Extended**, from \$58.00

Stainless Steel triple sensing range

Starting from \$84.00

PKW, PTW and PMW SERIES triple

Three-wire DC, one-piece body, virtually same sensing distance of all metals, Q/D version is IP67 rated, cable version is IP68 to 290 psi

Sensing distance: Triple

- 12 mm prox, from \$84.00
- 18 mm prox, from \$87.00
- 30 mm prox, from \$101.00

STAINLESS STEEL



8 mm round

Starting from \$16.00

AE SERIES

N.O. and N.C., Three-wire DC with embedded cable, M8 or M12 quick-disconnect

Sensing distance:

- **Standard**, from \$16.00
- **Extended**, from \$20.00
- **Triple**, from \$58.00

12 mm round

Starting from \$13.50

AM, PBM and PNM SERIES

Two- and three-wire DC, standard or harsh duty, embedded cable or M12 quick-disconnect

Sensing distance:

- **Standard**, from \$13.50
- **Extended**, from \$25.50
- **Triple**, from \$53.00

30 mm round

Starting from \$16.50

AT, PBT and PNT SERIES

Two- and three-wire DC, standard or harsh duty, embedded cable or M12 quick-disconnect

Sensing distance:

- **Standard**, from \$16.50
- **Extended**, from \$32.50

10 mm x 16 mm rectangular

Starting from \$26.00

DR10 SERIES

Three-wire DC with embedded cable or M12 quick-disconnect, IP67 rating

Sensing distance:

- **Standard**, from \$26.00
- **Extended**, from \$26.00



Stainless steel round

Starting from \$38.50

PKW, PMW and PTW SERIES
Three and four-wire DC with M12 quick-disconnect, IP67 rating, IP68 also available

Sensing distance: **Standard, Extended, Triple**

- 8 mm prox, from \$45.00
- 12 mm prox, from \$38.50
- 18 mm prox, from \$41.50
- 30 mm prox, from \$49.00



12, 18, 30 mm IP69K FDA-approved materials

Starting from \$35.50

PFM, PFK, PFT, VF and MAF SERIES

An assortment of AC and DC IP69K food and beverage rated Q/D proximity sensors.

Suitable for harsh environments

- 12 mm, from \$35.50
- 18 mm, from \$35.50
- 30 mm, from \$45.50

12 mm x 27 mm and 8 x 26.5 mm rectangular

Starting from \$17.50

APS SERIES
Three and two-wire DC with embedded cable, IP67 rating

Sensing distance: **Standard**

AC prox (12, 18, 30 mm)

Starting from \$31.00

V SERIES
Two-wire AC with embedded cable or quick-disconnect, 20-253 VAC input signals

- Sensing distance: **Standard**
- 12 mm, from \$35.50
 - 18 mm, from \$31.00
 - 30 mm, from \$37.50

Smooth barrel prox (4, 6.5 mm)

Starting from \$21.00

AC1 and AHS SERIES
N.O. and N.C., embedded cable or quick-disconnect

Sensing distance: **Standard and extended**

40 mm x 40 mm rectangular

Starting from \$39.00

LF SERIES
Three-wire and four-wire DC, IP67 rating, M12 quick-disconnect

- 3-wire, from \$39.00
- 4-wire, from \$42.00

Capacitive (12, 18, 30 mm round, and rectangular)

Starting from \$59.00

CM, CK, CT and CR SERIES
Two-wire AC and three-wire DC with M12 quick-disconnect or embedded cable

Ultrasonic

Starting from \$89.00

UK, SU, UT and TU SERIES
DC with discrete or analog output, embedded cable or quick-disconnect, IP67 rating

Sensing distance: **up to 3,500 mm**

- 18 mm, from \$89.00
- 30 mm, from \$185.00

UHZ SERIES

Starting from \$160.00

Rectangular DC, discrete output, through-beam pair, embedded cable

Sensing distance: **up to 300 mm**

Proximity with analog output

Starting from \$114.00

AE, AM, AK and AT ANALOG SERIES
DC with analog output (voltage/current), embedded cable or quick-disconnect, IP67 rating

Sensing distance: **Triple**

- 8 mm, from \$186.00
- 12 mm, from \$114.00
- 18 mm, from \$119.00
- 30 mm, from \$145.00



Contrinex® (Rectangular and 3, 4, 5, 8, 12, 18 and 30 mm round)

Starting from \$52.00

Triple Sensing - Shielded and Unshielded

- NO and NC, output
- Prewired and Quick-Disconnect options
- IO-Link models available



How do I Choose the Right Proximity Sensor?

All applications have certain specific needs, but, in general, the following steps will help you choose the correct sensor for your application:

Step 1:

What is the sensing distance required?

The sensing distance is the distance between the tip of the sensor and the object to be sensed. The selection guide and the specifications table for each sensor family lists the sensing distances.

Some things to keep in mind are:

A. In many applications, it is beneficial to place the sensor as far as possible from the sensing object due to temperature concerns. If a sensor is placed too close to a hot temperature source, the sensor will fail quicker and require more maintenance.

Greater distance may be achieved with extended and triple range sensors. In many applications, a sensor may not be mountable close to the sensed object. In this case, longer sensing distances are needed. Extended sensing distance sensors are offered in 8mm to 30mm dimeters, and triple sensing distance sensors in 8mm and 12mm formats.



Round sensors

In many cases, using an extended distance sensor to get the sensor farther away from the detected object can be beneficial to the life of the sensor. For example, without an extended distance sensor you may not be able to place the sensor close enough to the detectable object, or you may need to buy more expensive high temperature sensors.



Rectangular sensors

Another example would be a mechanical overshoot situation, where mounting the sensor farther from the detection object may eliminate unneeded contact with the sensor, thereby extending the life of the sensor.

These are just a few examples, but the benefits of using extended distance sensors are obvious in many applications. Think of how extended distance sensors could save you time and money in your application.

B. The material being sensed (i.e. brass, copper, aluminum, steel, etc.) makes a difference in the type of sensor needed.

Note: If you are sensing a non-metallic object, you must use a capacitive or ultrasonic sensor.

The sensing distances specified in this catalog were calculated using FE360 material. Many materials are more difficult to sense and require a shorter distance from the sensor tip to the object sensed.

If sensing a material that is difficult to sense, you may consider using our unique stainless steel sensing technology. This will measure virtually all materials at the specified sensing distances.


Step 2:

How much space is available for mounting the sensor?

Have you ever tried using a round sensor or short body version, and not been able to make it fit? Our rectangular sensors can meet your needs. The same technology used in a standard round proximity sensor is enclosed in a rectangular housing. This technology includes sensing distances, electrical protection and switching frequencies similar to round sensors.

Step 3:

Is a shielded or unshielded sensor needed? Shielded and unshielded sensors are also referred to as embeddable and non-embeddable. Unshielded sensors allow longer sensing distances but shielded sensors allow flush mounting.



Shielded sensor (embeddable)

Unshielded sensor (non-embeddable)

Step 4:

Consider environmental placement concerns. Will the sensor be placed underwater, in a high-temperature environment, continually splashed with oil, etc.? This will determine the type of sensor you may use. In the selection table and in the specification tables for each sensor family, we list the environmental protection degree ratings. Most of our sensors are rated IEC-IP67 and others are rated IP65 or IP68.

These ratings are defined as:

IP65: Protection from live or moving parts, dust, and protection from water jets from any direction.

IP67: Protection from live or moving parts, dust, and protection from immersion in water.

IP68: Protection from live or moving parts, dust, and protection from submersion in water under pressure.

P69K: Protection against high-pressure/steam-jet cleaning.

Step 5:

What is the sensor output connected to?

Note: If using AC sensors, please skip this step.

The type of output required must be determined (i.e., NPN, PNP or analog). Most PLC products will accept either output. If connecting to a solid state relay, a PNP output is needed.

Step 6a:

Do I need 2, 3, or 4-wire discrete outputs?

This is somewhat determined by what the sensor will be connected to. Some simple guidelines to use are:

Type	Guidelines
2-wire	<ul style="list-style-type: none"> Will work with sinking or sourcing devices. Only 2 wires to terminate. Higher leakage current.
3-wire	<ul style="list-style-type: none"> Most popular output. Familiar to most users. (Must select between NPN and PNP outputs.)
4-wire	<ul style="list-style-type: none"> Allows configurability in one device. May have both NPN/PNP selection or NO/NC selection. Allows user to stock one part for numerous applications.

Step 6b:

Do I need analog outputs?

This is determined by the sensor application and what the sensor will be connected to. Sensors with analog outputs produce an output signal approximately proportional to the target distance.

Type	Guidelines
1-5mA	available on AM9, AK9 and AT9 series analog inductive sensors
4-20mA	available on AM9, AK9 and AT9 series analog inductive sensors
0-5VDC	available on AM9, AK9 and AT9 series analog inductive sensors
0-10VDC	available on AE9, AM9, AK9 and AT9 series analog inductive sensors and SU and TU ultrasonic sensors

Step 7:

Determine output connection type.

Do you want an axial cable factory attached to the sensor (pigtail) or a quick-disconnect cable?

There are many advantages to using a quick-disconnect cable, such as easier maintenance and replacement. All proximity sensors will fail in time and using a Q/D (quick-disconnect) cable allows for simple replacement.

Factory attached axial cables come in a 2 meter length. CD08/CD12 Q/D cables come in 2 meter, 5 meter, and 7 meter lengths. Extension cables are available in 1 meter and 3 meter lengths to extend the length of the standard Q/D cables.

Q/D cables are offered in PVC and PUR jackets for meeting the requirements of all applications. Axial cables typically come with a PVC jacket. PVC is a general purpose insulation while PUR provides excellent oxidation, oil and ozone resistance. PUR is beneficial if the cable is exposed to oils or placed in direct sunlight.

There are also advantages to a factory attached axial cable:


Cost: The cable is integrated into the sensor and included in the price. Q/D cables must be purchased separately.

Environmental impact: Since the cable is sealed into the sensor, there is less chance of oil, water or dust penetration into the sensor, which could cause failure.

Proximity Sensor Selection Guide



Specifications	PY3 Stainless Steel DC	PY4 Stainless Steel DC	AC1 Stainless Steel DC	PD Stainless Steel DC	AHS Stainless Steel DC
Description	Miniature inductive proximity sensors, 3mm DC, stainless steel	Miniature inductive proximity sensors, 4mm DC, stainless steel	Miniature inductive proximity sensors, 4mm DC, stainless steel	Miniature inductive proximity sensors, 5mm, DC, stainless steel	Miniature inductive proximity sensors, 6.5 mm, DC, stainless steel
Sensing Distances	Standard distance: 0.6 mm Extended distance: 1.0 mm	Standard distance: 0.6 mm Extended distance: 1.0 mm	Standard distance: 0.8 mm Extended distance: 1.5 mm	Standard distance: 0.8 mm Extended distance: 1.5 mm	Standard distance: 1.5 mm Extended distance: 2.0 mm
Output State	NO	NO	NO/NC	NO	NO/NC
Logic Output	NPN / PNP	NPN / PNP	NPN / PNP	NPN / PNP	NPN / PNP
Connection Type	Axial cable	Axial cable	Axial cable / M8 connector	Axial cable / M8 connector	Axial cable / M8 connector
Supply Voltage	10 to 30 VDC	10 to 30 VDC	10 to 30 VDC	10 to 30 VDC	10 to 30 VDC
Switching Frequency	Standard distance: 5kHz	Extended distance: 3kHz	Standard and extended distance: 7kHz	Standard distance: 5kHz Extended distance: 3kHz	Standard and extended distance: 7kHz
Protection Degree	IEC-IP67	IEC-IP67	IEC-IP67	IEC-IP67	IEC-IP67

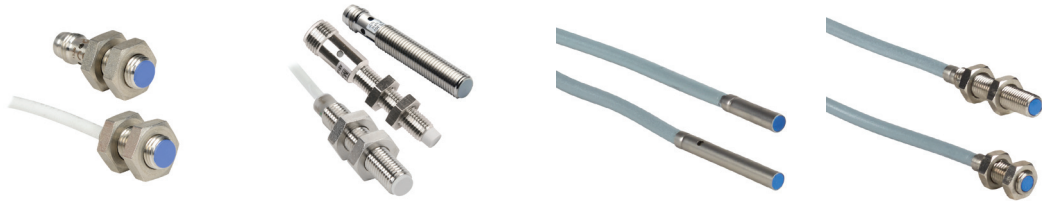


Specifications	AES Stainless Steel DC	AE1/AE6 Series	DW 3mm Stainless Steel DC	DW 4mm Stainless Steel DC
Description	Inductive proximity sensors, 8mm, DC, stainless steel	Inductive proximity sensors, 8mm, DC, nickel or chrome-plated brass	Inductive proximity sensors, 3mm, tubular stainless steel	Inductive proximity sensors, 4mm, tubular stainless steel
Sensing Distances	Standard distance: 1.5 mm Extended distance: 2mm	Standard distance 1.5 mm - 2.5 mm Extended distance 2.0 mm - 4.0 mm Triple distance 3.0 mm	Shielded: 1mm	Shielded: 1mm or 2.5 mm
Output State	NO / NC	NO	NO or NC	NO or NC
Logic Output	NPN / PNP	NPN / PNP	NPN or PNP	NPN or PNP
Connection Type	Axial cable / M8 connector	Axial cable / M12 connector	2m cable	2m cable or M8 quick-disconnect
Supply Voltage	10 to 30 VDC	10 to 30 VDC	10 to 30 VDC	10 to 30 VDC
Switching Frequency	Standard and extended distance: 7kHz	shielded: 3 kHz unshielded: 2.5 kHz	Shielded: 8kHz or 3kHz	Extended distance: 8kHz or 3kHz Triple distance: 800Hz
Protection Degree	IEC-IP67	IEC-IP67	IP67	IP67

Proximity Sensor Selection Guide



Specifications	DW 5mm Nickel Silver DC	DW 8mm Nickel Silver/Chrome-Plated Brass DC	DW 8mm Full Stainless Steel DC	DW 12mm Chrome-Plated Brass DC
Description	Inductive proximity sensors, 5mm, tubular nickel silver	Inductive proximity sensors, 8mm, tubular nickel silver or chrome-plated brass	Inductive proximity sensors, 8mm, tubular stainless steel	Inductive proximity sensors, 12mm, tubular chrome-plated brass
Sensing Distances	Shielded: 2.5 mm	Shielded: 3mm Unshielded: 6mm	Unshielded: 6mm	Shielded: 6mm Unshielded: 10mm
Output State	NO or NC	NO or NC	NO or NC	NO or NC
Logic Output	NPN or PNP	NPN or PNP	NPN or PNP	NPN or PNP
Connection Type	2m cable or M8 quick-disconnect	2m cable/M8 or M12 quick-disconnect	2m cable/M8 or M12 quick-disconnect	2m cable or M12 quick-disconnect
Supply Voltage	10 to 30 VDC	10 to 30 VDC	10 to 30 VDC	10 to 30 VDC
Switching Frequency	Shielded: 800Hz	Shielded: 1kHz Unshielded: 500Hz	Unshielded: 700Hz	Shielded: 800Hz Unshielded: 400Hz
Protection Degree	IP67	IP67	IP67/IP68	IP67

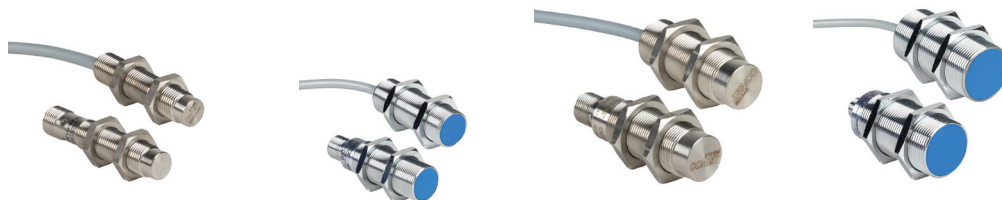

Specifications	DW 12mm Full Stainless Steel DC	DW 18mm Chrome-Plated Brass DC	DW 18mm Full Stainless Steel DC	DW 30mm Chrome-Plated Brass DC
Description	Inductive proximity sensors, 12mm, tubular stainless steel	Inductive proximity sensors, 18mm, tubular chrome-plated brass	Inductive proximity sensors, 18mm, tubular stainless steel	Inductive proximity sensors, 30mm, tubular chrome-plated brass
Sensing Distances	Unshielded: 10mm	Shielded: 12mm Unshielded: 20mm	Unshielded: 20mm	Shielded: 22mm Unshielded: 40mm
Output State	NO or NC	NO or NC	NO or NC	NO or NC
Logic Output	NPN or PNP	NPN or PNP	NPN or PNP	NPN or PNP
Connection Type	2m cable or M12 quick-disconnect	2m cable or M12 quick-disconnect	2m cable or M12 quick-disconnect	2m cable or M12 quick-disconnect
Supply Voltage	10 to 30 VDC	10 to 30 VDC	10 to 30 VDC	10 to 30 VDC
Switching Frequency	Unshielded: 400Hz	Shielded: 600Hz Unshielded: 500Hz	Unshielded: 200Hz	Shielded: 200Hz Unshielded: 100Hz
Protection Degree	IP68/IP69K	IP67	IP68/IP69K	IP67

Proximity Sensor Selection Guide



Specifications	DW 30mm Full Stainless Steel DC	DW 20mm x 32mm Rectangular Proximity Sensors DC	PNM DC	PNK DC	PNT DC
Description	Inductive proximity sensors, 30mm, tubular stainless steel	Inductive proximity sensors, 20x32mm, rectangular stainless steel	Inductive proximity sensors, 12mm, DC, metal	Inductive proximity sensors, 18mm, DC, metal	Inductive proximity sensors, 30mm, DC, metal
Sensing Distances	Unshielded: 40mm	Shielded: 7mm	Shielded: 4mm Unshielded: 7mm	Shielded: 8mm Unshielded: 12mm	Shielded: 15mm Unshielded: 22mm
Output State	NO or NC	NO	NO, NC	NO, NC	NO, NC
Logic Output	NPN or PNP	NPN or PNP	NPN / PNP	NPN / PNP	NPN / PNP
Connection Type	2m cable or M12 quick-disconnect	2m cable or M12 quick-disconnect	Axial cable / M12 connector	Axial cable / M12 connector	Axial cable / M12 connector
Supply Voltage	10 to 30 VDC	10 to 30 VDC	10 to 30 VDC	10 to 30 VDC	10 to 30 VDC
Switching Frequency	Unshielded: 90Hz	Unshielded: 180Hz	shielded/unshielded, 3 wire: 700Hz	shielded: 3-wire: 400Hz unshielded: 3-wire: 300Hz	shielded/unshielded, 3 wire: 100Hz
Protection Degree	IP68/IP69K	IP68/IP69K	IP65 / IP66 / IP67 / IP68 / IP69K	IP65 / IP66 / IP67 / IP68 / IP69K	IP65 / IP66 / IP67 / IP68 / IP69K

Proximity Sensor Selection Guide



Specifications	CR5 Rectangular DC	CR8 Rectangular DC	LF40 Rectangular DC	DR10 Rectangular DC	APS Rectangular DC
Description	5 x 5 rectangular inductive proximity sensors, DC, metal	8 x 8 rectangular inductive proximity sensors, DC, metal	40 x 40 x 66 rectangular inductive proximity sensors, DC, plastic	10 x 16 rectangular inductive prox sensor, DC, plastic	12 x 27 / 8 x 26.5 mm compact rectangular inductive proximity sensor; DC, plastic
Sensing Distances	Standard: 0.8 mm Extended distance: 1.5 mm	Standard distance: shielded: 0 to 1.5 mm Extended distance: shielded: 0 to 2 mm Triple distance: shielded: 3mm	Shielded: 20mm Unshielded: 35mm	Shielded: 3mm Unshielded: 6mm	2.5 mm, 4mm
Output State	NO	NO	NO; NO / NC Complementary	NO	NO/NC
Logic Output	NPN / PNP	NPN / PNP	PNP	NPN/ PNP	NPN/ PNP, NPN, PNP
Connection Type	Axial cable / M8 connector	Axial cable / M8 connector	M12 connector	Axial cable / M8 connector	Axial cable
Supply Voltage	10 to 30 VDC	10 to 30 VDC	10 to 36 VDC	10 to 30 VDC	10–30 VDC
Switching Frequency	Standard distance: 5kHz Extended distance: 3kHz	1kHz	Shielded: 100Hz Unshielded: 80Hz	3kHz	200Hz/500Hz
Protection Degree	IEC-IP67	IEC-IP67	IEC-IP67	IEC-IP67	IEC-IP67




Specifications	PEW Stainless Steel DC	PMW Stainless Steel DC	PKW Stainless Steel DC	PTW Stainless Steel DC	V Series AC
Description	Inductive proximity sensors, 8mm, DC, stainless steel	Inductive proximity sensors, 12mm, DC, stainless steel	Inductive proximity sensors, 18mm, DC, stainless steel	30mm inductive proximity sensors, DC, stainless steel	12mm/18mm/30mm inductive proximity sensor, AC, metal
Sensing Distances	Standard distance: 2mm	Standard distance: 2mm Extended distance: 3mm, 4mm Triple distance: 6mm	Standard distance: 5mm Extended distance: 8mm Triple distance: 10mm	PTW-A*-5: 20mm PTW-AP-1: 10mm	M12 models shielded: 2mm Unshielded: 4mm M18 models shielded: 5mm Unshielded: 8mm M30 models shielded: 10mm unshielded: 15mm
Output State	NO	NO; NO / NC	NO; NO / NC	NO	NO
Logic Output	PNP	NPN / PNP	NPN / PNP	PTW-A*-5: NPN / PNP PTW-AP-1: PNP	-
Connection Type	M8 / M12 connector	Axial Cable / M12 connector	Axial cable / M12 connector	PTW-A*-5: Axial Cable / M12 connector PTW-AP-1: M12 connector	Axial cable / M12 connector
Supply Voltage	10 to 36 VDC	10 to 30 VDC PMW-AP-1H: 10 to 36 VDC	10 to 30 VDC; PKW-AP-1H: 10 to 36 VDC	PTW-A*-5: 10 to 30 VDC; PTW-AP-1: 10 to 36 VDC	20 to 253 VAC, 50/60Hz
Switching Frequency	Standard distance, shielded: 100Hz	Standard/extended distance: 2kHz Triple distance: 400Hz	Standard/extended distance: 1kHz Triple distance: 200Hz	PTW-A*-5: 100Hz; PTW-AP-1: 50Hz	25Hz
Protection Degree	PEW-AP-1F: IEC-IP67 PEW-AP-1H: IEC-IP67 and IP68	Standard/extended distance: IEC-IP67/68 Triple distance: IEC-IP67 connector / IP68 (cable)	Standard/extended distance: IEC-IP67/68 Triple distance: IEC-IP67 connector / IP68 (cable)	PTW-A*-5: IEC-IP67 (connector/ IP68 cable) PTW-AP-1: IEC-IP67, IP68	IEC-IP67

Proximity Sensor Selection Guide



Specifications	CM Capacitive DC	CK Capacitive DC	CT Capacitive DC, AC/DC	CR Capacitive DC
Description	12mm capacitive proximity sensors; DC, metal	18mm capacitive proximity sensors; DC, plastic	30mm capacitive proximity sensors; DC, AC/DC, plastic and metal	Rectangular capacitive proximity sensors; DC, plastic
Sensing Distances	Shielded: 6mm Unshielded: 12mm	12mm	Shielded: 15mm Unshielded: 20mm, 40mm	12mm
Output State	NO	NO/NC	NO, NC, NO/NC	NO/NC
Logic Output	PNP	NPN/ PNP	NPN/ PNP, NPN, PNP	NPN/ PNP
Connection Type	M12 connector	M12 connector	Axial cable, M12 connector and 1/2 inch AC micro connector	Axial cable
Supply Voltage	10-36 VDC	10-36 VDC	10 to 30 VDC, 10 to 36 VDC, 20 to 250 VDC/30 to 250 VAC	10-36 VDC
Switching Frequency	50Hz	10Hz	100Hz, 10Hz	10Hz
Protection Degree	IEC-IP65	IEC-IP65, IEC-IP67	IEC-IP65, IEC-IP67	IEC-IP65, IEC-IP67

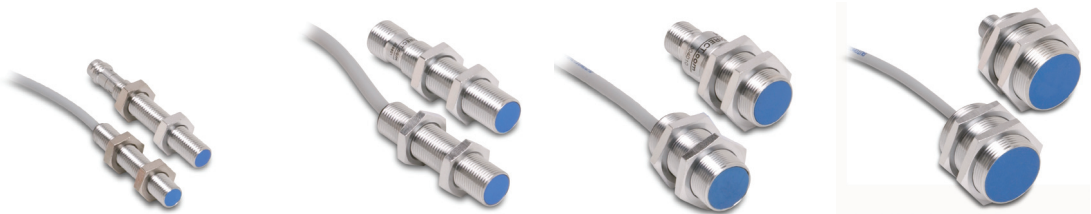

Specifications	AE Analog Prox	AM Analog Prox	AK Analog Prox	AT Analog Prox
Description	Analog inductive proximity sensors, 8mm, metal	Analog inductive proximity sensors, 12mm, metal	Analog inductive proximity sensors, 18mm, metal	Analog inductive proximity sensors, 30mm, metal
Sensing Distance	0-4mm	0-6mm	0-10mm	0-20mm
Output	0-10VDC	0-5 VDC, 1-5mA / 0-10 VDC, 4 -20mA	0-5 VDC, 1-5mA / 0-10 VDC, 4-20mA	0-5 VDC, 1-5mA / 0-10 VDC, 4-20mA
Supply Voltage	15-30 VDC	10-30 VDC / 15-30 VDC	10-30 VDC / 15-30 VDC	10-30 VDC / 15-30 VDC
Connection Type	Axial cable / M8 connector	Axial cable / M12 connector	Axial cable / M12 connector	Axial cable / M12 connector
Protection Degree	IEC-IP67	IEC-IP67	IEC-IP67	IEC-IP67

Proximity Sensor Selection Guide



Specifications	UK1 Ultrasonic Sensor DC	UK6 Ultrasonic Sensor DC	UT1 Ultrasonic Sensor DC	UT2 Ultrasonic Sensor DC
Description	Ultrasonic Sensor, 18mm, plastic, DC and analog output models	Ultrasonic Sensor, 18mm, plastic, DC and analog output models, short body	Ultrasonic Sensor, 30mm, plastic, DC and analog output models	Ultrasonic Sensor, 30mm, plastic, DC and analog output models
Sensing Distances	50-2200 mm	40-900 mm	250-3500 mm	350-6000 mm
Output	DC models: PNP, NPN, NO/NC Analog models: 0-10 VDC or 4-20 mA	DC models: PNP, NPN, NO/NC Analog models: 0-10 VDC or 4-20 mA	DC models: PNP, NPN, NO/NC Analog models: 0-10 VDC or 4-20 mA	DC models: PNP, NPN, NO/NC Analog models: 0-10 VDC or 4-20 mA
Supply Voltage	15-30 VDC	15-30VDC	12-30 VDC, 15-30 VDC (0-10 VDC)	12-30 VDC, 15-30 VDC (0-10 VDC)
Connection Type	M12 connector or 2m prewired output cable	M12 (12mm) connector or 2m prewired output cable	M12 (12mm) connector or 2m prewired output cable	M12 (12mm) connector or 2m prewired output cable
Protection Degree	IEC-IP67	IEC-IP67	IEC-IP67	IEC-IP67



Specifications	SU Ultrasonic Sensor DC	TU Ultrasonic Sensor DC	UHZ Ultrasonic Sensor DC	PFM Series DC
Description	Ultrasonic Sensor, 18mm, plastic, DC and analog output models	Ultrasonic Sensor, 30mm, plastic, DC and analog output models	Ultrasonic Sensor, 30mm x 20mm, plastic, thru-beam models	Food and Beverage Inductive Proximity Sensors 12 mm stainless steel, DC
Sensing Distances	100 to 600 mm 200 to 1500 mm	300 to 2500 mm	300mm	Standard Shielded: 2mm Unshielded: 4mm Extended Shielded: 4mm Unshielded: 7 - 8 mm
Output State	DC models: PNP NO Analog models: 0-10VDC	DC models: PNP NO Analog models: 0-10VDC	PNP/NPN, NO/NC	NO/NC selectable; N. O.
Logic Output		NA		NPN/PNP
Connection Type	Axial cable/M12 connector	M12 connector	2 meter Axial cable	M12 connector
Supply Voltage	DC models: 15-30VDC Analog models: 18-30VDC	19-30VDC	18-30VDC	NO only: 10 to 36 VDC; NO/NC: 10 to 30 VDC
Switching Frequency	NA	NA	NA	NO only - 800Hz NO/NC - 2000Hz
Protection Degree	IEC-IP67	IEC-IP67	IEC-IP67	IEC: IP68, IP69K

Proximity Sensor Selection Guide



Specifications	PFK Series DC	PFT Series DC	VF Series AC	MAE DC
Description	Food and Beverage Inductive Proximity Sensors 18 mm stainless steel, DC	IP69K-rated Inductive Proximity Sensors 30 mm stainless steel, DC	IP69K-rated Inductive Proximity Sensors 18mm/30mm stainless steel, AC	IP67 Magnetic Proximity Sensors 8mm stainless steel, DC
Sensing Distances	Standard Shielded: 5mm Unshielded: 8mm Extended Shielded: 8mm Unshielded: 12mm	Shielded: 14 - 15 mm Unshielded: 22mm	18mm models: Shielded: 5mm Unshielded: 12mm 30mm models: Shielded: 14mm Unshielded: 22mm	60mm
Output State	NO/NC selectable; N. O.	N. O.	N. O.	NO
Logic Output	NPN/PNP	PNP	NA	PNP
Connection Type	M12 connector	M12 connector	1/2" micro AC	M8 connector or 2m cable
Supply Voltage	NO only: 10 to 36 VDC; NO/NC: 10 to 30 VDC	10 to 36 VDC	20 to 140 AC/DC, 47 to 63 Hz AC	10 to 30 VDC
Switching Frequency	NO only - Shielded: 600Hz Unshielded: 300Hz NO/NC - 1500 Hz	NO only - Shielded: 50Hz Unshielded: 100Hz	AC - 25Hz DC 18 mm - 300Hz DC 30 mm - 100Hz	5kHz
Protection Degree	IEC IP68, IP69K	IEC IP68, IP69K	IEC IP68, IP69K	IP67



Specifications	MAF DC	MMW/ MKW DC	MDR DC
Description	IP69K Magnetic Proximity Sensors 12mm or 18mm stainless steel, DC	IP65/IP67 Magnetic Proximity Sensors 12mm or 18mm Stainless Steel, DC	IP67 Magnetic Proximity Sensors Rectangular Plastic, DC
Sensing Distances	12mm housing - 60mm 18mm housing - 70mm	12mm housing - 60mm 18mm housing - 70mm	60mm
Output State	NO	NO or NC	NO
Logic Output	PNP	PNP or NPN	PNP
Connection Type	M12 connector	M12 connector or 2m cable	M8 connector or 2m cable
Supply Voltage	10 to 30 VDC	10 to 30 VDC	10 to 30 VDC
Switching Frequency	5kHz	5kHz	5kHz
Protection Degree	IEC IP68, IP69K	IP65, IP67	IP67

PY3 Series Inductive Proximity Sensors

Miniature Ø3 (3 mm) stainless steel – DC



- Smooth barrel (no threads)
- Four models available
- Complete overload protection
- IP67 rated
- Stainless steel construction
- LED status indicator
- Lifetime warranty


PY Series Ø3 DC Inductive Prox Selection Chart							
Part Number	Price	Sensing Range	Housing	Output State	Logic	Connection	Dimensions
Standard Distance							
PY3-AN-1A	\$72.00	0.6 mm (0.024 in)	Shielded	NO	NPN	2 m (6.5') axial cable	Figure 1
PY3-AP-1A	\$72.00				PNP	2 m (6.5') axial cable	Figure 1
Extended Distance							
PY3-AN-3A	\$79.00	1mm (0.039 in)	Shielded	N.O.	NPN	2 m (6.5') axial cable	Figure 1
PY3-AP-3A	\$79.00				PNP	2 m (6.5') axial cable	Figure 1

PY Series Specifications		
	Standard Distance	Extended Distance
Mounting Type	Shielded	
Nominal Sensing Distance	0.6 mm (0.024 in)	1mm (0.039 in)
Operating Distance	NA	
Material Correction Factors	See Material Influence Table at the end of this section	
Output Type	NPN or PNP, NO only, 3-wire	
Operating Voltage	10 to 30 VDC	
No-load Supply Current	≤10mA	
Operating (Load) Current	≤100mA	
Off-state (Leakage) Current	≤10µA	≤0.1mA
Voltage Drop	≤2.0 V	
Switching Frequency	5kHz	3kHz
Differential Travel (% of Nominal Distance)	≤10%	
Repeat Accuracy	≤5%	
Ripple	≤20%	
Time Delay Before Availability (tv)	10 ms	
Reverse Polarity Protection	Yes	
Short-Circuit Protection	Yes (switch auto-resets after overload is removed)	
Operating Temperature	-25° to +70°C (-13° to 158 F)	
Protection Degree (DIN 40050)	IEC IP67	
Indication/Switch Status	Yellow (output energized)	
Housing Material	Stainless steel	
Sensing Face Material	Polyester	
Shock/Vibration	See terminology section.	
Tightening Torque	NA	
Weight	23 g (0.81 oz)	22 g (0.78 oz)
Connection	2 meter PVC cable	
Agency Approvals	UL file E328811	

Dimensions


mm [inches]

Figure 1

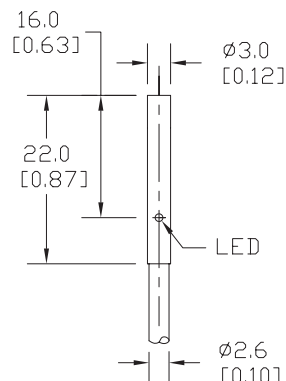


Wiring diagrams

PNP Output



NPN Output



PY4 Series Inductive Proximity Sensors

Miniature M4 (4 mm) stainless steel – DC



- Four models available
- Complete overload protection
- IP67 rated
- Stainless steel construction
- LED status indicator
- Lifetime warranty


PY Series M4 DC Inductive Prox Selection Chart

Part Number	Price	Sensing Range	Housing	Output State	Logic	Connection	Dimensions
Standard Distance							
PY4-AN-1A	\$72.00	0.6 mm (0.024 in)	Shielded	NO	NPN	2 m (6.5') axial cable	Figure 1
PY4-AP-1A	\$72.00				PNP	2 m (6.5') axial cable	Figure 1
Extended Distance							
PY4-AN-3A	\$79.00	1 mm (0.039 in)	Shielded	NO	NPN	2 m (6.5') axial cable	Figure 1
PY4-AP-3A	\$79.00				PNP	2 m (6.5') axial cable	Figure 1

Dimensions

mm [inches]

Figure 1

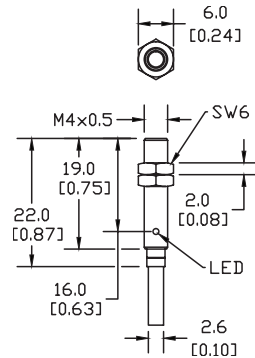


PY Series Specifications


	Standard Distance	Extended Distance
Mounting Type	Shielded	
Nominal Sensing Distance	0.6 mm (0.02 in)	1 mm (0.04 in)
Operating Distance	NA	
Material Correction Factors	See Material Influence Table at the end of this section	
Output Type	NPN or PNP/NO only/3-wire	
Operating Voltage	10 to 30 VDC	
No-load Supply Current	≤10mA	
Operating (Load) Current	≤100mA	
Off-state (Leakage) Current	≤10µA	≤0.1mA
Voltage Drop	≤2.0 V	
Switching Frequency	5 kHz	3 kHz
Differential Travel (% of Nominal Distance)	≤10%	
Repeat Accuracy	≤5%	
Ripple	≤20%	
Time Delay Before Availability (tv)	10 ms	
Reverse Polarity Protection	Yes	
Short-Circuit Protection	Yes (switch auto-resets after overload is removed)	
Operating Temperature	-25° to +70°C (-13° to 158 F)	
Protection Degree (DIN 40050)	IEC IP67	
Indication/Switch Status	Yellow (output energized)	
Housing Material	Stainless steel	
Sensing Face Material	Polyester	
Shock/Vibration	See terminology section.	
Tightening Torque	0.8 Nm (7.08 in./lbs.)	
Weight	23 g (0.81 oz)	26 g (0.92oz)
Connection	2 meter PVC cable	
Agency Approvals	UL file E328811	

Wiring diagrams

PNP Output



NPN Output



AC1 Series Inductive Proximity Sensors



Miniature $\Phi 4$ mm stainless steel

- Smooth barrel
- Sixteen models available
- NPN or PNP, NO or NC
- Complete overload protection
- IP67 rated
- Stainless steel construction
- Yellow output LED 360 degree visible
- Lifetime warranty



AC1 Series $\Phi 4$ mm Inductive Prox Selection Chart								
Part Number	Price	Sensing Range	Housing	Output State	Logic	Connection	Wiring	Dimensions
Standard Distance								
AC1-AN-1A	\$22.50	0.8 mm (0.03 in)	Shielded	NO	NPN	2 m (6.5') axial cable	Diagram 1	Figure 1
AC1-AP-1A	\$22.50				PNP	2 m (6.5') axial cable	Diagram 2	Figure 1
AC1-AN-1F	\$23.50				NPN	M8 connector	Diagram 3	Figure 2
AC1-AP-1F	\$23.50				PNP	M8 connector	Diagram 4	Figure 2
AC1-CN-1A	\$22.50			NC	NPN	2 m (6.5') axial cable	Diagram 1	Figure 1
AC1-CP-1A	\$22.50				PNP	2 m (6.5') axial cable	Diagram 2	Figure 1
AC1-CN-1F	\$23.50				NPN	M8 connector	Diagram 3	Figure 2
AC1-CP-1F	\$23.50				PNP	M8 connector	Diagram 4	Figure 2
Extended Distance								
AC1-AN-3A	\$26.00	1.5 mm (0.06 in)	Shielded	NO	NPN	2 m (6.5') axial cable	Diagram 1	Figure 1
AC1-AP-3A	\$26.00				PNP	2 m (6.5') axial cable	Diagram 2	Figure 1
AC1-AN-3F	\$27.00				NPN	M8 connector	Diagram 3	Figure 2
AC1-AP-3F	\$27.00				PNP	M8 connector	Diagram 4	Figure 2
AC1-CN-3A	\$26.00			NC	NPN	2 m (6.5') axial cable	Diagram 1	Figure 1
AC1-CP-3A	\$26.00				PNP	2 m (6.5') axial cable	Diagram 2	Figure 1
AC1-CN-3F	\$27.00				NPN	M8 connector	Diagram 3	Figure 2
AC1-CP-3F	\$27.00				PNP	M8 connector	Diagram 4	Figure 2

SEE OUR WEBSITE: WWW.AUTOMATIONDIRECT.COM FOR COMPLETE ENGINEERING DRAWINGS.

Dimensions

mm [inches]

Figure 1


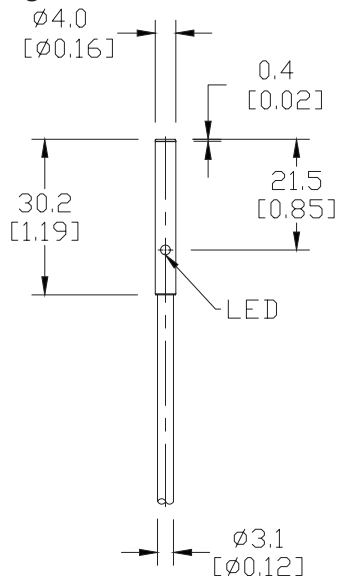


Figure 2

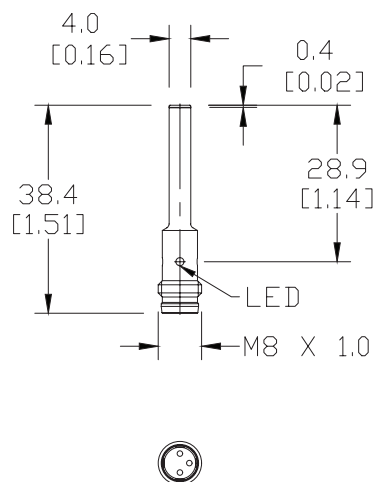

AC1 Series Inductive Proximity Sensors

AC1 Series Specifications		
	Standard Distance	Extended Distance
Mounting Type	Shielded	
Nominal Sensing Distance	0.8 mm (0.031 in)	1.5 mm (0.06 in)
Operating Distance	NA	
Material Correction Factors	See Material Influence Table at the end of this section	
Output Type	NPN or PNP/NO or NC/3-wire	
Operating Voltage	10 to 30 VDC	
No-load Supply Current	≤10mA	
Operating (Load) Current	≤100mA	
Off-state (Leakage) Current	≤10 μA	
Voltage Drop	≤1.5 V	
Switching Frequency	7 kHz	
Differential Travel (% of Nominal Distance)	≤10%	
Repeat Accuracy	≤5%	
Ripple	≤10%	
Time Delay Before Availability (tv)	≤50 ms	
Reverse Polarity Protection	Yes	
Short-Circuit Protection	Yes (auto-reset)	
Operating Temperature	-25° to 70°C (-13° to 158° F)	
Protection Degree (DIN 40050)	IP67	
Indication/Switch Status	Yellow output (on energized)	
Housing Material	Stainless Steel	
Sensing Face Material	Polybutylene Terephthalate	
Shock/Vibration	See Terminology Section	
Tightening Torque	NA	
Weight	30g (1.06 oz) (cable version) 4g (0.14 oz) (M8 connector)	
Connection	2m PUR Cable or M8 Connector	
Agency Approvals	CE cULus E187310	

SEE OUR WEBSITE: WWW.AUTOMATIONDIRECT.COM FOR COMPLETE ENGINEERING DRAWINGS.

Wiring diagrams

Diagram 1

NPN Cable


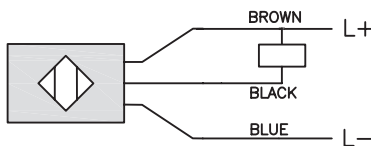


Diagram 2

PNP Cable



Connector



Diagram 3

NPN M8 Connector


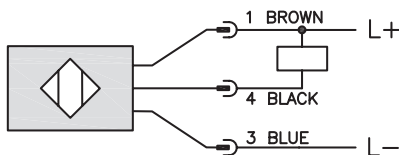


Diagram 4

PNP M8 Connector

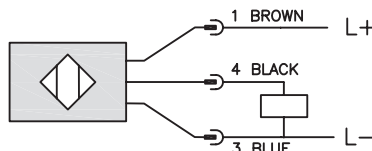

*smooth barrel (no threads)

PD Series Inductive Proximity Sensors

Miniature M5 (5 mm) stainless steel – DC



- Eight models available
- Stainless steel construction
- Axial cable or M8 quick-disconnect models
- Complete overload protection
- IP67 rated
- Smallest self-contained inductive proximity sensor available on the U.S. market
- LED status indicator
- Lifetime warranty



PD Series M5 DC Inductive Prox Selection Chart							
Part Number	Price	Sensing Range	Housing	Output State	Logic	Connection	Dimensions
Standard Distance							
PD1-AN-1A	\$41.00	0.8 mm (0.03 in)	Shielded	NO	NPN	2 m (6.5') axial cable	Figure 1
PD1-AP-1A	\$41.00				PNP	2 m (6.5') axial cable	Figure 1
PD1-AN-1F	\$41.00				NPN	M8 (8 mm) connector	Figure 2
PD1-AP-1F	\$41.00				PNP	M8 (8 mm) connector	Figure 2
Extended Distance							
PD1-AN-3A	\$49.00	1.5 mm (0.06 in)	Shielded	N.O	NPN	2 m (6.5') axial cable	Figure 1
PD1-AP-3A	\$49.00				PNP	2 m (6.5') axial cable	Figure 1
PD1-AN-3F	\$49.00				NPN	M8 (8 mm) connector	Figure 2
PD1-AP-3F	\$49.00				PNP	M8 (8 mm) connector	Figure 2

PD Series Specifications		
Mounting Type	Standard Distance	Extended Distance
		Shielded
Nominal Sensing Distance	0.8 mm (0.03 in)	1.5 mm (0.06 in)
Operating Distance	NA	
Material Correction Factors	See Material Influence table #1 later in this section	
Output Type	NPN or PNP/NO only/3-wire	
Operating Voltage	10 to 30 VDC	
No-load Supply Current	≤10mA	
Operating (Load) Current	≤200mA	
Off-state (Leakage) Current	≤10µA	≤0.1mA
Voltage Drop	≤2.0 V	
Switching Frequency	5 kHz	3 kHz
Differential Travel (% of Nominal Distance)	≤10%	
Repeat Accuracy	≤1.5%	
Ripple	≤20%	
Time Delay Before Availability (tv)	10 ms	
Reverse Polarity Protection	Yes	
Short-Circuit Protection	Yes (switch auto-resets after overload is removed)	
Operating Temperature	-25° to +70°C (-13° to 158°F)	
Protection Degree (DIN 40050)	IEC IP67	
Indication/Switch Status	Yellow (output energized)	
Housing Material	Stainless steel	
Sensing Face Material	Polybutylene Terephthalate (PBT)	Polyester
Shock/Vibration	See terminology section.	
Tightening Torque	1.5 Nm (13.3 lb./in.)	
Weight	43 g (1.52 oz)/10 g (0.36 oz)	34 g (1.20 oz)/4 g (0.14 oz)
Connection	2 meter PVC axial cable / M8 connector	
Agency Approvals	UL file E328811	

Dimensions

mm [inches]

Figure 1



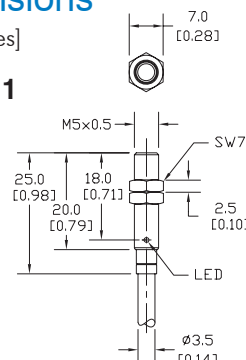


Figure 2

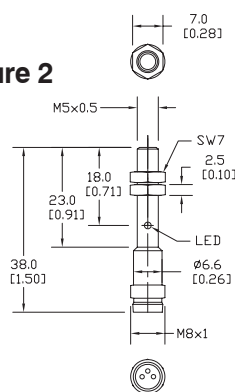


Wiring diagrams

NPN Output




PNP Output



Connector

M8 connector



AHS Series Inductive Proximity Sensors

Miniature $\Phi 6.5$ mm stainless steel – DC



- Smooth barrel
- Sixteen models available
- NPN or PNP, NO or NC
- Complete overload protection
- IP67-rated

- Stainless steel construction
- Yellow output LED 360 degree visible
- Lifetime warranty



AHS Series $\Phi 6.5$ DC Inductive Prox Selection Chart								
Part Number	Price	Sensing Range	Housing	Output State	Logic	Connection	Wiring	Dimensions
Standard Distance								
AHS-AN-1A	\$21.00	1.5 mm (0.06 in)	Shielded	NO	NPN	2 m (6.5') axial cable	Diagram 1	Figure 1
AHS-AP-1A	\$21.00				PNP	2 m (6.5') axial cable	Diagram 2	Figure 1
AHS-AN-1F	\$22.50				NPN	M8 connector	Diagram 3	Figure 2
AHS-AP-1F	\$22.50				PNP	M8 connector	Diagram 4	Figure 2
AHS-CN-1A	\$21.00			NC	NPN	2 m (6.5') axial cable	Diagram 1	Figure 1
AHS-CP-1A	\$21.00				PNP	2 m (6.5') axial cable	Diagram 2	Figure 1
AHS-CN-1F	\$22.50				NPN	M8 connector	Diagram 3	Figure 2
AHS-CP-1F	\$22.50				PNP	M8 connector	Diagram 4	Figure 2
Extended Distance								
AHS-AN-3A	\$24.50	2 mm (0.08 in)	Shielded	NO	NPN	2 m (6.5') axial cable	Diagram 1	Figure 1
AHS-AP-3A	\$24.50				PNP	2 m (6.5') axial cable	Diagram 2	Figure 1
AHS-AN-3F	\$26.00				NPN	M8 connector	Diagram 3	Figure 2
AHS-AP-3F	\$26.00				PNP	M8 connector	Diagram 4	Figure 2
AHS-CN-3A	\$24.50			NC	NPN	2 m (6.5') axial cable	Diagram 1	Figure 1
AHS-CP-3A	\$24.50				PNP	2 m (6.5') axial cable	Diagram 2	Figure 1
AHS-CN-3F	\$26.00				NPN	M8 connector	Diagram 3	Figure 2
AHS-CP-3F	\$26.00				PNP	M8 connector	Diagram 4	Figure 2

Dimensions

mm [inches]

Figure 1


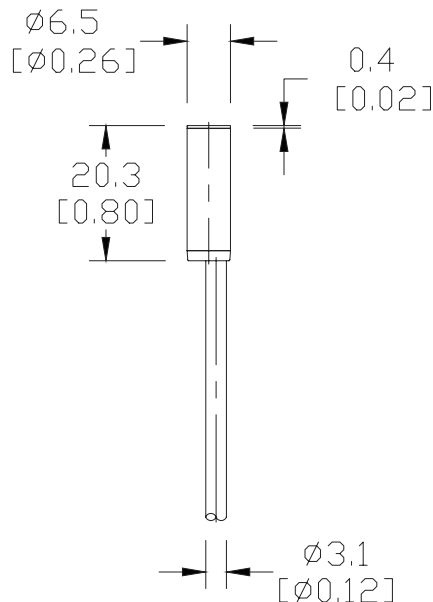


Figure 2

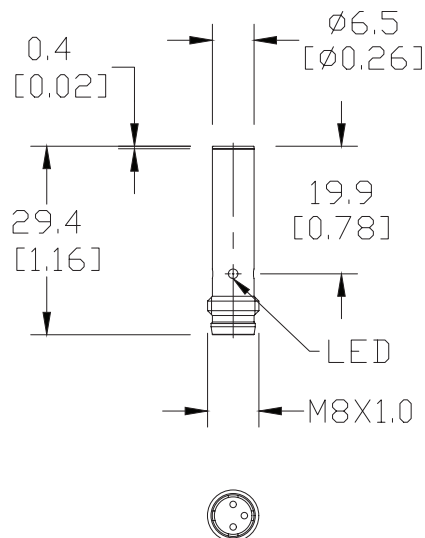

SEE OUR WEBSITE: WWW.AUTOMATIONDIRECT.COM FOR COMPLETE ENGINEERING DRAWINGS.

AHS Series Inductive Proximity Sensors

AHS Series Specifications		
	Standard Distance	Extended Distance
Mounting Type	Shielded	
Nominal Sensing Distance	1.5 mm (0.06 in)	2 mm (0.078 in)
Operating Distance	NA	
Material Correction Factors	See Material Influence Table at the end of this section	
Output Type	NPN or PNP/NO or NC/3-wire	
Operating Voltage	10 to 30 VDC	
No-load Supply Current	≤10mA	
Operating (Load) Current	≤100mA	
Off-state (Leakage) Current	≤10 μA	
Voltage Drop	≤1.5 V	
Switching Frequency	7 kHz	
Differential Travel (% of Nominal Distance)	≤10%	
Repeat Accuracy	≤5%	
Ripple	≤10%	
Time Delay Before Availability (tv)	≤50 ms	
Reverse Polarity Protection	Yes	
Short-Circuit Protection	Yes (auto-reset)	
Operating Temperature	-25° to 70°C (-13° to 158° F)	
Protection Degree (DIN 40050)	IP67	
Indication/Switch Status	Yellow output (on energized)	
Housing Material	Stainless Steel	
Sensing Face Material	Polybutylene Terephthalate	
Shock/Vibration	See Terminology Section	
Tightening Torque	NA	
Weight	30g (1.06 oz) (cable version) 4g (0.14 oz) (M8 connector)	
Connection	2m PUR Cable or M8 Connector	
Agency Approvals	CE cULus E187310	

Wiring diagrams

Diagram 1

NPN Cable


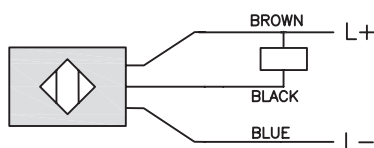


Diagram 2

PNP Cable



Connector



Diagram 3

NPN M8 Connector


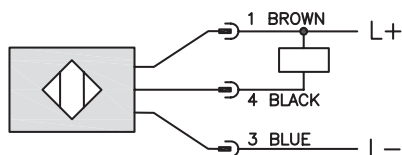


Diagram 4

PNP M8 Connector

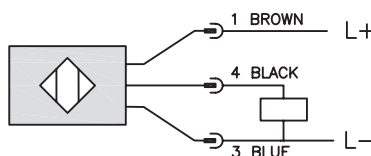

SEE OUR WEBSITE: WWW.AUTOMATIONDIRECT.COM FOR COMPLETE ENGINEERING DRAWINGS.

AES Series Inductive Proximity Sensors

Miniature M8 (8 mm) stainless steel – DC



- Sixteen models available
- NPN or PNP, NO or NC
- Complete overload protection
- IP67 rated
- Stainless steel construction
- Yellow output LED 360 degree visible
- Lifetime warranty



AES Series M8 DC Inductive Prox Selection Chart								
Part Number	Price	Sensing Range	Housing	Output State	Logic	Connection	Wiring	Dimensions
Standard Distance								
AES-AN-1A	\$16.00	1.5 mm (0.06 in)	Shielded	NO output	NPN	2 m (6.5') axial cable	Diagram 1	Figure 1
AES-AP-1A	\$16.00				PNP	2 m (6.5') axial cable	Diagram 2	Figure 1
AES-AN-1F	\$17.50				NPN	M8 connector	Diagram 3	Figure 2
AES-AP-1F	\$17.50				PNP	M8 connector	Diagram 4	Figure 2
AES-CN-1A	\$16.00			NC output	NPN	2 m (6.5') axial cable	Diagram 1	Figure 1
AES-CP-1A	\$16.00				PNP	2 m (6.5') axial cable	Diagram 2	Figure 1
AES-CN-1F	\$17.50				NPN	M8 connector	Diagram 3	Figure 2
AES-CP-1F	\$17.50				PNP	M8 connector	Diagram 4	Figure 2
Extended Distance								
AES-AN-3A	\$20.00	2 mm (0.08 in)	Shielded	NO output	NPN	2 m (6.5') axial cable	Diagram 1	Figure 1
AES-AP-3A	\$20.00				PNP	2 m (6.5') axial cable	Diagram 2	Figure 1
AES-AN-3F	\$21.00				NPN	M8 connector	Diagram 3	Figure 2
AES-AP-3F	\$21.00				PNP	M8 connector	Diagram 4	Figure 2
AES-CN-3A	\$20.00			NC output	NPN	2 m (6.5') axial cable	Diagram 1	Figure 1
AES-CP-3A	\$20.00				PNP	2 m (6.5') axial cable	Diagram 2	Figure 1
AES-CN-3F	\$21.00				NPN	M8 connector	Diagram 3	Figure 2
AES-CP-3F	\$21.00				PNP	M8 connector	Diagram 4	Figure 2

Dimensions

mm [inches]

Figure 1


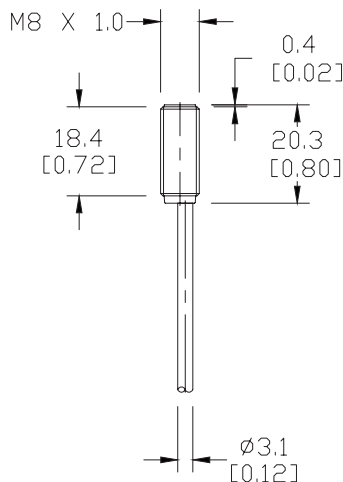


Figure 2

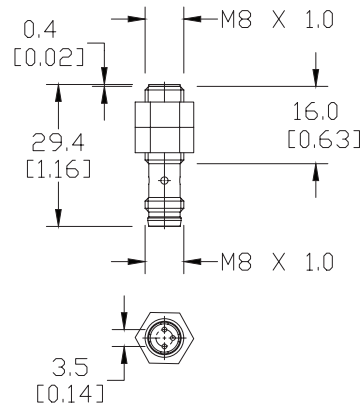

SEE OUR WEBSITE: WWW.AUTOMATIONDIRECT.COM FOR COMPLETE ENGINEERING DRAWINGS.

AES Series Inductive Proximity Sensors

AES Series Specifications		
	Standard Distance	Extended Distance
Mounting Type	Shielded	
Nominal Sensing Distance	1.5 mm (0.06 in)	2 mm (0.078 in)
Operating Distance	NA	
Material Correction Factors	See Material Influence Table at the end of this section	
Output Type	NPN or PNP/NO or NC/3-wire	
Operating Voltage	10 to 30 VDC	
No-load Supply Current	≤10mA	
Operating (Load) Current	≤100mA	
Off-state (Leakage) Current	≤10 μA	
Voltage Drop	≤1.5 V	
Switching Frequency	7 kHz	
Differential Travel (% of Nominal Distance)	≤10%	
Repeat Accuracy	≤5%	
Ripple	≤10%	
Time Delay Before Availability (tv)	≤50 ms	
Reverse Polarity Protection	Yes	
Short-Circuit Protection	Yes (auto-reset)	
Operating Temperature	-25° to 70°C (-13° to 158° F)	
Protection Degree (DIN 40050)	IP67	
Indication/Switch Status	Yellow output (on energized)	
Housing Material	Stainless Steel	
Sensing Face Material	Polybutylene Terephthalate	
Shock/Vibration	See Terminology Section	
Tightening Torque	4Nm (2.95 lb-ft)	
Weight	30g (1.06 oz) (cable version) 4g (0.14 oz) (M8 connector)	
Connection	2m PUR Cable or M8 Connector	
Agency Approvals	CE cULus E187310	

Wiring diagrams

Diagram 1

NPN Cable


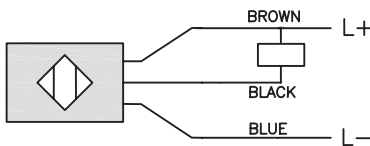


Diagram 2

PNP Cable



Connector



Diagram 3

NPN M8 Connector


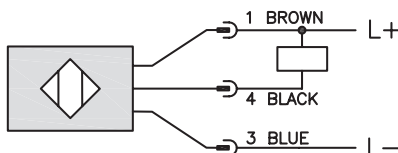


Diagram 4

PNP M8 Connector



AE1/AE6 Series Inductive Proximity Sensors

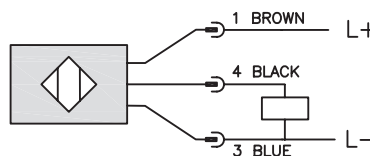

M8 (8 mm) metal – DC

- 24 standard length models available
- 8 short body length models available
- Compact metal housing
- Axial cable, M8 or M12 quick-disconnect models
- Complete overload protection
- IP67 rated
- LED status indicators are visible 360° around the cylinder
- Lifetime warranty



AE1 Series Standard Length M8 DC Inductive Prox Selection Chart								
Part Number	Price	Sensing Range	Housing	Output State	Logic	Connection	Wiring	Dimensions
Standard Distance								
AE1-AN-1A	\$21.00	0 to 1.5 mm (0-0.06 in)	Shielded	NO	NPN	2 m (6.5') axial cable	Diagram 1	Figure 1
AE1-AP-1A	\$21.00				PNP	2 m (6.5') axial cable	Diagram 2	Figure 1
AE1-AN-1H	\$21.00				NPN	M12 (12 mm) connector	Diagram 3	Figure 2
AE1-AP-1H	\$21.00				PNP	M12 (12 mm) connector	Diagram 4	Figure 2
AE1-AN-1F	\$21.00				NPN	M8 (8 mm) connector	Diagram 3	Figure 3
AE1-AP-1F	\$21.00				PNP	M8 (8 mm) connector	Diagram 4	Figure 3
AE1-AN-2A	\$21.00	0 to 2.5 mm (0-0.098 in)	Unshielded	NO	NPN	2 m (6.5') axial cable	Diagram 1	Figure 1
AE1-AP-2A	\$21.00				PNP	2 m (6.5') axial cable	Diagram 2	Figure 1
AE1-AN-2H	\$21.00				NPN	M12 (12 mm) connector	Diagram 3	Figure 2
AE1-AP-2H	\$21.00				PNP	M12 (12 mm) connector	Diagram 4	Figure 2
AE1-AN-2F	\$21.00				NPN	M8 (8 mm) connector	Diagram 3	Figure 3
AE1-AP-2F	\$21.00				PNP	M8 (8 mm) connector	Diagram 4	Figure 3
Extended Distance								
AE1-AN-3A	\$26.50	0 to 2 mm (0-0.08 in)	Shielded	NO	NPN	2 m (6.5') axial cable	Diagram 1	Figure 1
AE1-AP-3A	\$26.50				PNP	2 m (6.5') axial cable	Diagram 2	Figure 1
AE1-AN-3F	\$26.50				NPN	M8 (8 mm) connector	Diagram 3	Figure 3
AE1-AP-3F	\$26.50				PNP	M8 (8 mm) connector	Diagram 4	Figure 3
AE1-AN-4A	\$26.50	0 to 4 mm (0-0.157 in)	Unshielded	NO	NPN	2 m (6.5') axial cable	Diagram 1	Figure 1
AE1-AP-4A	\$26.50				PNP	2 m (6.5') axial cable	Diagram 2	Figure 1
AE1-AN-4F	\$26.50				NPN	M8 (8 mm) connector	Diagram 3	Figure 3
AE1-AP-4F	\$26.50				PNP	M8 (8 mm) connector	Diagram 4	Figure 3
Triple Distance								
AE1-AN-5A	\$58.00	0 to 3 mm (0-0.118 in)	Shielded	NO	NPN	2 m (6.5') axial cable	Diagram 1	Figure 1
AE1-AP-5A	\$58.00				PNP	2 m (6.5') axial cable	Diagram 2	Figure 1
AE1-AN-5F	\$58.00				NPN	M8 (8 mm) connector	Diagram 3	Figure 4
AE1-AP-5F	\$58.00				PNP	M8 (8 mm) connector	Diagram 4	Figure 4

AE6 Series Short Body M8 DC Inductive Prox Selection Chart								
Part Number	Price	Sensing Range	Housing	Output State	Logic	Connection	Wiring	Dimensions
Extended Distance								
AE6-AN-3A	\$31.00	0 to 2 mm (0-0.08 in)	Shielded	NO	NPN	2 m (6.5') axial cable	Diagram 1	Figure 5
AE6-AP-3A	\$31.00				PNP	2 m (6.5') axial cable	Diagram 2	Figure 5
AE6-AN-3F	\$31.00				NPN	M8 (8 mm) connector	Diagram 3	Figure 6
AE6-AP-3F	\$31.00				PNP	M8 (8 mm) connector	Diagram 4	Figure 6
AE6-AN-4A	\$31.00	0 to 4 mm (0-0.157 in)	Unshielded	NO	NPN	2 m (6.5') axial cable	Diagram 1	Figure 5
AE6-AP-4A	\$31.00				PNP	2 m (6.5') axial cable	Diagram 2	Figure 5
AE6-AN-4F	\$31.00				NPN	M8 (8 mm) connector	Diagram 3	Figure 6
AE6-AP-4F	\$31.00				PNP	M8 (8 mm) connector	Diagram 4	Figure 6

AE1/AE6 Series Inductive Proximity Sensors

AE Series Specifications					
	Standard Distance Models		Extended Distance Models		Triple Distance Models
Mounting Type	Shielded	Unshielded	Shielded	Unshielded	Shielded
Nominal Sensing Distance	1.5mm (0.06in)	2.5mm (0.098in)	2mm (0.08in)	4mm (0.157in)	3mm (0.118in)
Operating Distance	NA				
Material Correction Factors	See Material Influence Table at the end of this section				
Output Type	NPN or PNP/NO only/3-wire				
Operating Voltage	10 to 30 VDC				
No-load Supply Current	≤20mA		≤10mA		
Operating (Load) Current	≤200mA				
Off-state (Leakage) Current	≤10μA		≤120μA		
Voltage Drop	≤1.2 V				≤2.0 V
Switching Frequency	3 kHz	2.5 kHz	3 kHz	1 kHz	
Differential Travel (% of Nominal Distance)	2 to 10%		1 to 20%		≤10%
Repeat Accuracy	≤2%		≤5%		
Ripple	≤10%				≤20%
Time Delay Before Availability (tv)	100 ms (5 ms for AE6 short body models)				50 ms
Reverse Polarity Protection	Yes				
Short-Circuit Protection	Yes (switch auto-resets after overload is removed)				
Operating Temperature	-25° to +70°C (-13° to 158°F)				
Protection Degree (DIN 40050)	IEC IP67				
Indication/Switch Status	Yellow (output energized)				
Housing Material	Nickel-plated brass			Chrome-plated brass	
Sensing Face Material	Polybutylene Terephthalate (PBT)				
Shock/Vibration	See terminology section				
Tightening Torque	4 Nm (2.95 lb-ft)				
Weight (cable/M8 connector/M12 connector)	43 g (1.52 oz)/16 g (0.56 oz)/20 g (0.71 oz)			54 g (1.90 oz)/26 g (0.92 oz)/(NA)	
Connection	2 meter PVC axial cable / M8 connector / M12 connector				
Agency Approvals	NA			UL file E328811	

Wiring diagrams

Diagram 1



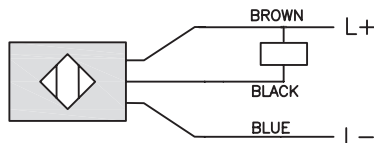


Diagram 2



Connectors

M8 connector



M12 connector



Diagram 3


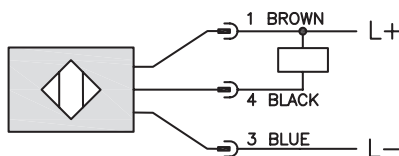


Diagram 4

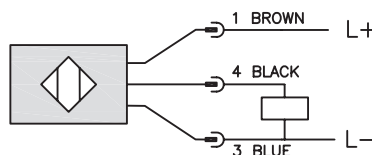

AE1/AE6 Series Inductive Proximity Sensors

Dimensions

mm [inches]

Figure 1

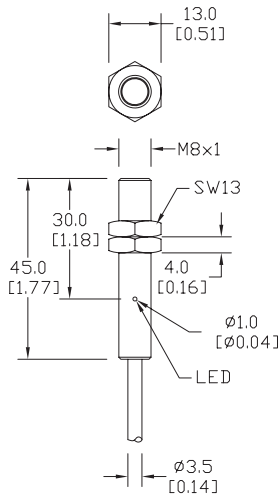


Figure 2

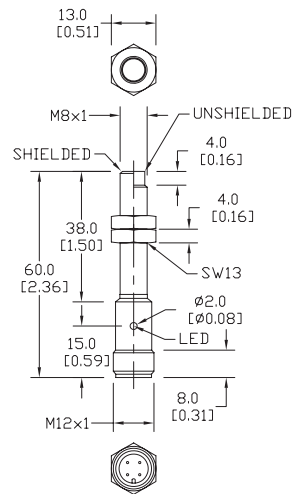


Figure 3

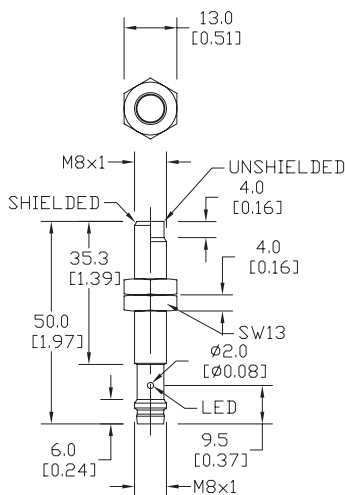


Figure 4

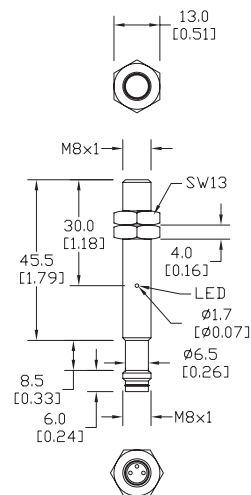


Figure 5


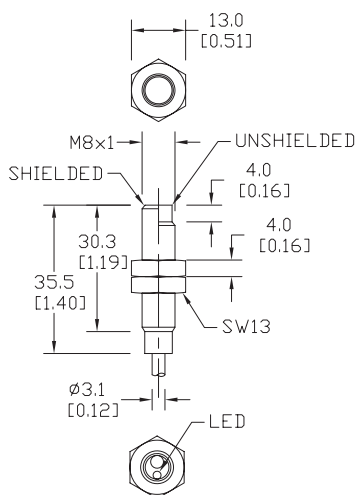



Figure 6

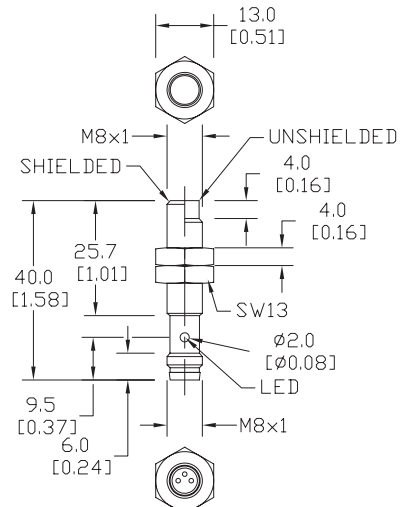

SEE OUR WEBSITE: WWW.AUTOMATIONDIRECT.COM FOR COMPLETE ENGINEERING DRAWINGS.


DW Series 3mm Inductive Proximity Sensors

Miniature Ø3 (3mm) – DC



- Four models available
- Complete overload protection
- IP67 rated
- Stainless steel construction

- LED status indicator
- Lifetime warranty



DW Series Ø3 (3mm) DC Inductive Prox Selection Chart									
Part Number	Price	Size	Sensing Range	Housing	Output State	Logic	Connection	Wiring	Dimensions
Extended Distance									
DW-AD-621-03-960	\$65.00	Ø3 (Smooth barrel)	1mm (0.039 in)	Shielded	NO	NPN	2m (6.5 ft) axial cable	Diagram 1	Figure 1
DW-AD-623-03-960*	\$65.00					PNP		Diagram 2	Figure 1
DW-AD-622-03	\$65.00				NC	NPN		Diagram 1	Figure 2
DW-AD-624-03	\$65.00					PNP		Diagram 2	Figure 2

*IO-Link model

Dimensions

mm [inches]

Figure 1





Figure 2

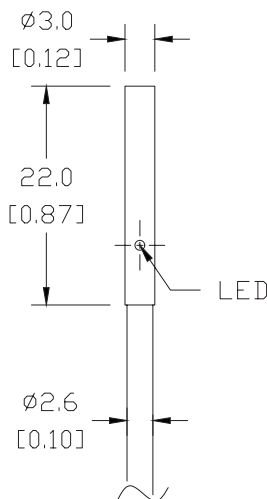

DW Series 3mm Inductive Proximity Sensors

DW Series Ø3 Specifications		
	DW-Ax-62x-03-96x	DW-Ax-62x-03
Mounting Type	Shielded	
Nominal Sensing Distance	1mm	
Operating Distance	-	
Material Correction Factors	See Material Influence in the Proximity Sensor Terminology section.	
Output Type	NPN or PNP, NO or NC	
Operating Voltage	10 to 30 VDC	
No-load Supply Current	≤ 10mA	
Operating (Load) Current	≤ 100mA	
Off-state (Leakage) Current	≤ 0.1 mA	
Voltage Drop	≤ 2 V	
Switching Frequency	≤8kHz	≤3kHz
Differential Travel (% of Nominal Distance)	≤ 10%	
Repeat Accuracy	0.02 mm	
Ripple	≤ 20%	
Time Delay Before Availability (tv)	≤10ms	
Reverse Polarity Protection	Yes	
Short-Circuit Protection	Yes	
Operating Temperature	-25 to 70°C (-13 to 158°F)	
Protection Degree (DIN 40050)	IP67	
Indication/Switch Status	Yellow LED	
Housing Material	Stainless steel	
Sensing Face Material	POM (polyoxymethylene)	
Shock/Vibration	IEC 60947-5-2/7.4	
Tightening Torque	-	
Weight	18g (0.625 oz)	
Connection	2m cable	
I/O Link	PNP NO Version Only	
Agency Approvals	cULus E239373	

Note: To obtain the most current agency approval information, see the Agency Approval Checklist section on the specific part number's web page.

Wiring diagrams

Diagram 1

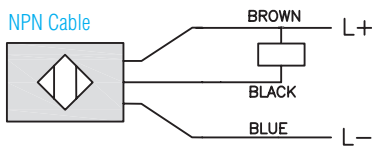


Diagram 2




Diagram 3


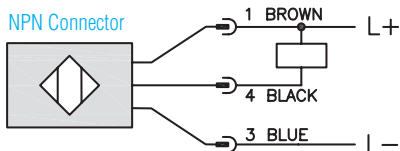


Diagram 4




DW Series 4mm Inductive Proximity Sensors

Miniature M4 (4mm) stainless steel – DC

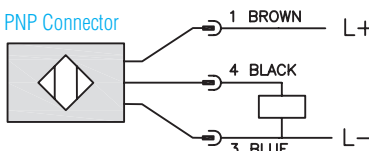

- Four models available
- Complete overload protection
- IP67 rated
- Two M4 lock nuts included
- Stainless steel construction
- LED status indicator
- Lifetime warranty



DW Series M4 DC Inductive Prox Selection Chart									
Part Number	Price	Size	Sensing Range	Housing	Output State	Logic	Connection	Wiring	Dimensions
Extended Distance									
DW-AD-621-M4-960	\$65.00	M4	1mm (0.039 in)	Shielded	NO	NPN	2m (6.5') axial cable	Diagram 1	Figure 1
DW-AD-623-M4-960	\$65.00					PNP		Diagram 2	Figure 1
DW-AD-622-M4	\$65.00				NC	NPN		Diagram 1	Figure 2
DW-AD-624-M4	\$65.00					PNP		Diagram 2	Figure 2

Dimensions

mm [inches]

Figure 1


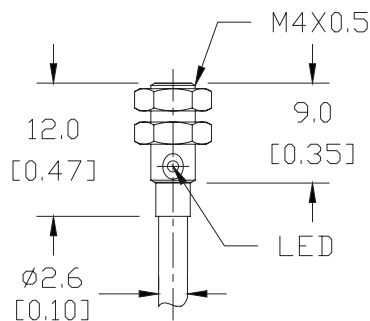


Figure 2

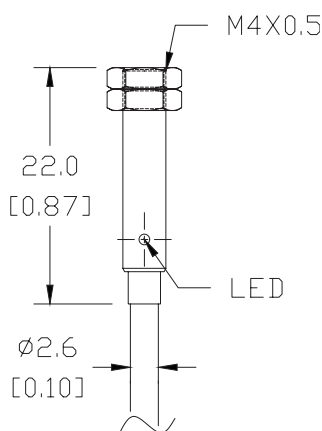

SEE OUR WEBSITE: WWW.AUTOMATIONDIRECT.COM FOR COMPLETE ENGINEERING DRAWINGS.

DW Series 4mm Inductive Proximity Sensors

Miniature M4 (4mm) nickel silver – DC



- Eight models available
- 4mm smooth triple distance proximity sensor
- Complete overload protection
- IP67 rated
- Nickel silver construction
- LED status indicator
- Lifetime warranty



DW Series 4mm Smooth Triple Distance Inductive Prox Selection Chart									
Part Number	Price	Size	Sensing Range	Housing	Output State	Logic	Connection	Wiring	Dimensions
Triple Distance									
DW-AD-501-04	\$86.00	Ø4 (Smooth barrel)	2.5 mm (0.098 in)	Shielded	NO	NPN	2m (6.5') axial cable	Diagram 1	Figure 1
DW-AD-503-04	\$86.00					PNP		Diagram 2	Figure 1
DW-AS-501-04	\$86.00					NPN	M8 quick disconnect	Diagram 3	Figure 2
DW-AS-503-04	\$86.00					PNP		Diagram 4	Figure 2
DW-AD-502-04	\$86.00				NC	NPN	2m (6.5') axial cable	Diagram 1	Figure 1
DW-AD-504-04	\$86.00					PNP		Diagram 2	Figure 1
DW-AS-502-04	\$86.00					NPN	M8 quick disconnect	Diagram 3	Figure 2
DW-AS-504-04	\$86.00					PNP		Diagram 4	Figure 2

Dimensions

mm [inches]

Figure 1


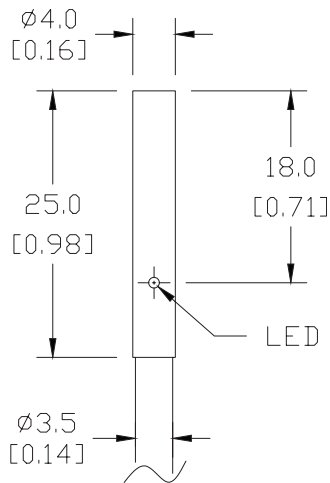


Figure 2

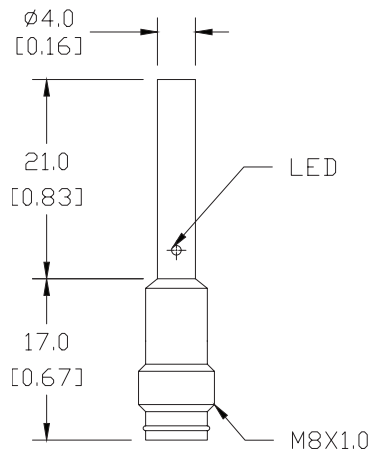

DW Series 4mm Inductive Proximity Sensors

DW Series 4mm Specifications			
Mounting Type	DW-Ax-62x-M4-96x	DW-Ax-62x-M4	DW-Ax-50x-04
		shielded	
Nominal Sensing Distance	1mm		2.5 mm
Operating Distance	-		
Material Correction Factors	See Material Influence in the Proximity Sensor Terminology section.		
Output Type	NPN or PNP, NO or NC		
Operating Voltage	10 to 30 VDC		
No-load Supply Current	≤ 10mA		
Operating (Load) Current	≤ 100mA		≤ 200mA
Off-state (Leakage) Current	≤ 0.1 mA		
Voltage Drop	≤ 2V		
Switching Frequency	≤8kHz	≤3kHz	≤800Hz
Differential Travel (% of Nominal Distance)	≤ 10%		
Repeat Accuracy	0.02 mm		
Ripple	≤ 20%		
Time Delay Before Availability (tv)	≤10ms		≤30ms
Reverse Polarity Protection	Yes		
Short-Circuit Protection	Yes		
Operating Temperature	-25 to 70°C (-13 to 158°F)		
Protection Degree (DIN 40050)	IP67		
Indication/Switch Status	Yellow LED		
Housing Material	Stainless steel		Nickel silver
Sensing Face Material	PET (Polyester)		
Shock/Vibration	IEC 60947-5-2/7.4		
Tightening Torque	-		
Weight	20g (0.71 oz) or 6g (0.211 oz)		31g (1.09 oz) or 3g (0.11 oz)
Connection	2m cable		2m cable or M8 connection
I/O Link	-		
Agency Approvals	CE, cULus E239373		

Note: To obtain the most current agency approval information, see the Agency Approval Checklist section on the specific part number's web page.

Wiring diagrams

Diagram 1

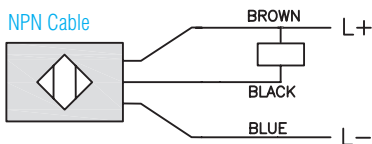


Diagram 2




Diagram 3


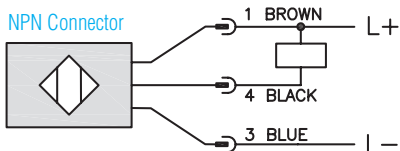


Diagram 4



Connectors

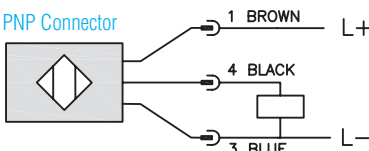

DW Series 5mm Triple Sensing Proximity Sensors

Miniature M5 (5mm) nickel silver– DC



- Eight models available
- 5mm triple distance proximity sensor
- Complete overload protection
- IP67 rated
- Two M5 lock nuts included
- Nickel silver construction
- LED status indicator
- Lifetime warranty



DW Series 5mm Triple Distance Inductive Prox Selection Chart									
Part Number	Price	Size	Sensing Range	Housing	Output State	Logic	Connection	Wiring	Dimensions
Triple Distance									
DW-AD-501-M5	\$79.50	M5	2.5 mm (0.098 in)	Shielded	NO	NPN	2m (6.5') axial cable	Diagram 1	Figure 1
DW-AD-503-M5	\$79.50					PNP		Diagram 2	Figure 1
DW-AS-501-M5	\$79.50					NPN	M8 quick disconnect	Diagram 3	Figure 2
DW-AS-503-M5	\$79.50					PNP		Diagram 4	Figure 2
DW-AD-502-M5	\$79.50				NC	NPN	2m (6.5') axial cable	Diagram 1	Figure 1
DW-AD-504-M5	\$79.50					PNP		Diagram 2	Figure 1
DW-AS-502-M5	\$79.50					NPN	M8 quick disconnect	Diagram 3	Figure 2
DW-AS-504-M5	\$79.50					PNP		Diagram 4	Figure 2

DW Series Specifications	DW-Ax-50x-M5
Mounting Type	Shielded
Nominal Sensing Distance	2.5 mm
Operating Distance	–
Material Correction Factors	See Material Influence in the Proximity Sensor Terminology section.
Output Type	NPN or PNP, NO or NC
Operating Voltage	10 to 30 VDC
No-load Supply Current	≤ 10mA
Operating (Load) Current	≤ 200mA
Off-state (Leakage) Current	≤ 0.1 mA
Voltage Drop	≤ 2V
Switching Frequency	≤ 800Hz
Differential Travel (% of Nominal Distance)	≤ 10%
Repeat Accuracy	0.03 mm
Ripple	≤ 20%
Time Delay Before Availability (tv)	≤ 30ms
Reverse Polarity Protection	Yes
Short-Circuit Protection	Yes
Operating Temperature	-25 to 70°C (-13 to 158°F)
Protection Degree (DIN 40050)	IP67
Indication/Switch Status	Yellow LED
Housing Material	Nickel silver
Sensing Face Material	PPE (Noryl)
Shock/Vibration	IEC 60947-5-2/7.4
Tightening Torque	–
Weight	33g (1.16 oz), 5g (0.18 oz)
Connection	2m cable, M8 connection
I/O Link	–
Agency Approvals	CE, cULus E239373

Note: To obtain the most current agency approval information, see the Agency Approval Checklist section on the specific part number's web page.

DW Series 5mm Triple Sensing Proximity Sensors

Dimensions

mm [inches]

Figure 1


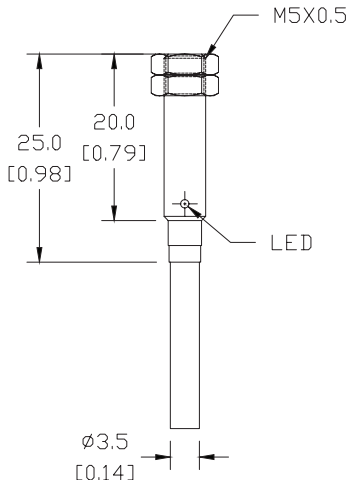


Figure 2



Wiring diagrams

Diagram 1

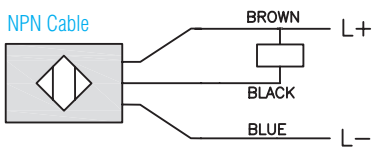


Diagram 2




Diagram 3



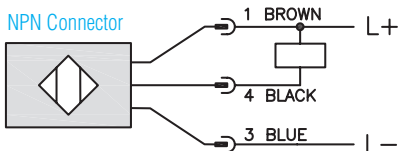


Diagram 4

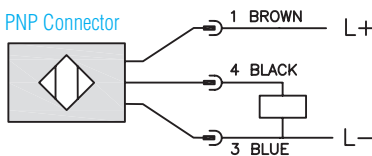

Connectors

M8 connector



SEE OUR WEBSITE: WWW.AUTOMATIONDIRECT.COM FOR COMPLETE ENGINEERING DRAWINGS.

DW Series 8mm Triple Sensing Proximity Sensors

Miniature M8 (8mm) chrome plate nickel silver or chrome plated brass – DC



- Twenty-four models available
- 8mm threaded Triple Distance proximity sensor
- Complete overload protection
- IP67 rated
- Two M8 lock nuts included
- Chrome plate nickel silver or chrome plated brass construction
- LED status indicator
- Lifetime warranty



DW Series M8 Triple Distance Inductive Prox Selection Chart											
Part Number	Price	Size	Sensing Range	Housing	Output State	Logic	Connection	Wiring	Dimensions		
Triple Distance Shielded											
DW-AD-501-M8	\$52.00	M8	3mm (0.118 in)	Shielded	NO	NPN	2m (6.5') axial cable	Diagram 1	Figure 1		
DW-AD-503-M8	\$52.00					PNP		Diagram 2	Figure 1		
DW-AS-501-M8-001	\$52.00					NPN	M8 quick disconnect	Diagram 3	Figure 2		
DW-AS-503-M8-001	\$52.00					PNP		Diagram 4	Figure 2		
DW-AS-501-M8	\$52.00					NPN	M12 quick disconnect	Diagram 3	Figure 3		
DW-AS-503-M8	\$52.00					PNP		Diagram 4	Figure 3		
DW-AD-502-M8	\$52.00				NC			NPN	2m (6.5') axial cable	Diagram 1	Figure 1
DW-AD-504-M8	\$52.00							PNP		Diagram 2	Figure 1
DW-AS-502-M8-001	\$52.00							NPN	M8 quick disconnect	Diagram 3	Figure 2
DW-AS-504-M8-001	\$52.00							PNP		Diagram 4	Figure 2
DW-AS-502-M8	\$52.00							NPN	M12 quick disconnect	Diagram 3	Figure 3
DW-AS-504-M8	\$52.00							PNP		Diagram 4	Figure 3
Triple Distance Unshielded											
DW-AD-511-M8	\$56.00	M8	6mm (0.236 in)	Unshielded	NO	NPN	2m (6.5') axial cable	Diagram 1	Figure 1		
DW-AD-513-M8	\$56.00					PNP		Diagram 2	Figure 1		
DW-AS-511-M8-001	\$56.00					NPN	M8 quick disconnect	Diagram 3	Figure 2		
DW-AS-513-M8-001	\$56.00					PNP		Diagram 4	Figure 2		
DW-AS-511-M8	\$56.00					NPN	M12 quick disconnect	Diagram 3	Figure 3		
DW-AS-513-M8	\$56.00					PNP		Diagram 4	Figure 3		
DW-AD-512-M8	\$56.00				NC			NPN	2m (6.5') axial cable	Diagram 1	Figure 1
DW-AD-514-M8	\$56.00							PNP		Diagram 2	Figure 1
DW-AS-512-M8-001	\$56.00							NPN	M8 quick disconnect	Diagram 3	Figure 2
DW-AS-514-M8-001	\$56.00							PNP		Diagram 4	Figure 2
DW-AS-512-M8	\$56.00							NPN	M12 quick disconnect	Diagram 3	Figure 3
DW-AS-514-M8	\$56.00							PNP		Diagram 4	Figure 3

Note: To obtain the most current agency approval information, see the Agency Approval Checklist section on the specific part number's web page.

DW Series 8mm Triple Sensing Proximity Sensors

DW Series M8 Specifications		
Sensor	DW-Ax-50x-M8	DW-Ax-51x-M8
Mounting Type	shielded	unshielded
Nominal Sensing Distance	3mm	6mm
Operating Distance	-	
Material Correction Factors	See Material Influence in the Proximity Sensor Terminology section.	
Output Type	NPN or PNP, NO or NC	
Operating Voltage	10 to 30 VDC	
No-load Supply Current	≤ 10mA	
Operating (Load) Current	≤ 100mA	
Off-state (Leakage) Current	≤ 0.1 mA	
Voltage Drop	≤ 2 V	
Switching Frequency	≤ 1kHz	≤ 500Hz
Differential Travel (% of Nominal Distance)	≤ 15%	
Repeat Accuracy	0.15 mm	0.30 mm
Ripple	≤ 20%	
Time Delay Before Availability (tv)	≤ 50ms	
Reverse Polarity Protection	Yes	
Short-Circuit Protection	Yes	
Operating Temperature	-25 to 70°C (-13 to 158°F)	
Protection Degree (DIN 40050)	IP67	
Indication/Switch Status	Yellow LED	
Housing Material	Nickel silver	Chrome plated brass
Sensing Face Material	PPS (Polyphenylene sulfide)	
Shock/Vibration	IEC 60947-5-2/7.4	
Tightening Torque	-	
Weight	45g (1.59 oz), 20g (0.71 oz), 17g (0.60 oz)	44g (1.55 oz), 19g (0.67 oz), 16g (0.56 oz)
Connection	2m cable, M12 connection, M8 connection	
I/O Link	-	
Agency Approvals	CE, cULus E239373	

Note: To obtain the most current agency approval information, see the Agency Approval Checklist section on the specific part number's web page.

Wiring diagrams

Diagram 1

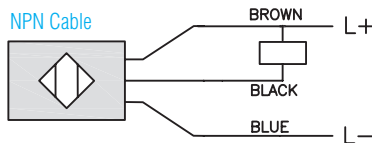


Diagram 2




Diagram 3



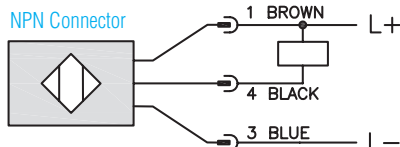


Diagram 4

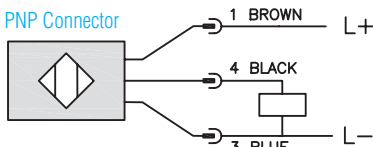

Connectors



DW Series 8mm Triple Sensing Proximity Sensors

Dimensions

mm [inches]

Figure 1

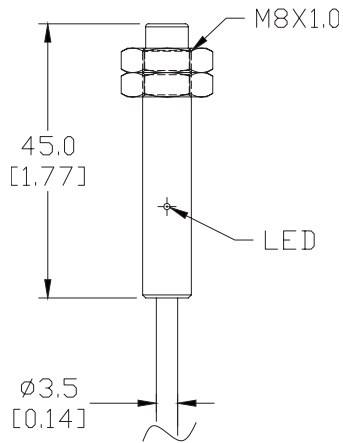


Figure 2


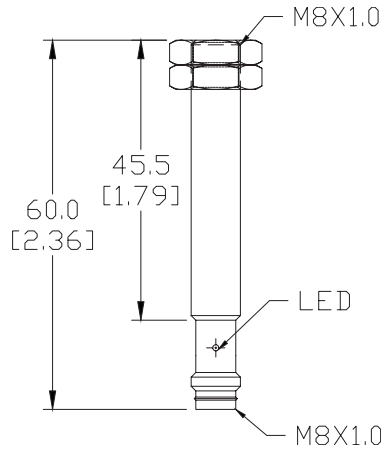


Figure 3

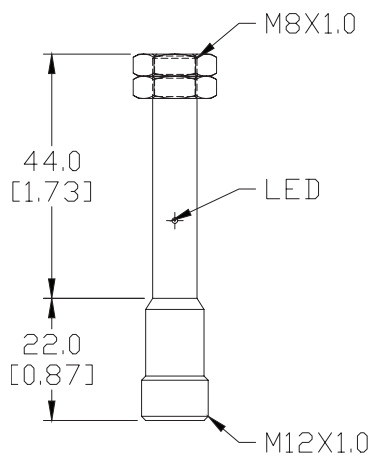


SEE OUR WEBSITE: WWW.AUTOMATIONDIRECT.COM FOR COMPLETE ENGINEERING DRAWINGS.

DW Series 8mm Stainless Steel Triple Sensing Proximity Sensors

Miniature M8 (8mm) – DC



- Twelve models available
- 8mm threaded triple distance proximity sensor
- Complete overload protection
- IP67 and IP68-rated
- Two M8 lock nuts included
- Stainless steel construction
- LED status indicator
- One-piece for Harsh duty applications
- Lifetime warranty



DW Series M8 Triple Distance Inductive Prox Selection Chart											
Part Number	Price	Size	Sensing Range	Housing	Output State	Logic	Connection	Wiring	Dimensions		
Triple Distance											
DW-AD-711-M8	\$84.00	M8	6mm (0.236 in)	Unshielded	NO	NPN	2m (6.5') axial cable	Diagram 1	Figure 1		
DW-AD-713-M8	\$84.00					PNP		Diagram 2	Figure 1		
DW-AS-711-M8-001	\$84.00					NPN	M8 quick disconnect	Diagram 3	Figure 2		
DW-AS-713-M8-001	\$84.00					PNP		Diagram 4	Figure 2		
DW-AS-711-M8	\$84.00					NPN	M12 quick disconnect	Diagram 3	Figure 3		
DW-AS-713-M8	\$84.00					PNP		Diagram 4	Figure 3		
DW-AD-712-M8	\$84.00				NO	Unshielded	NC	NPN	2m (6.5') axial cable	Diagram 1	Figure 1
DW-AD-714-M8	\$84.00							PNP		Diagram 2	Figure 1
DW-AS-712-M8-001	\$84.00							NPN	M8 quick disconnect	Diagram 3	Figure 2
DW-AS-714-M8-001	\$84.00							PNP		Diagram 4	Figure 2
DW-AS-712-M8	\$84.00							NPN	M12 quick disconnect	Diagram 3	Figure 3
DW-AS-714-M8	\$84.00							PNP		Diagram 4	Figure 3

Dimensions

mm [inches]

Figure 1

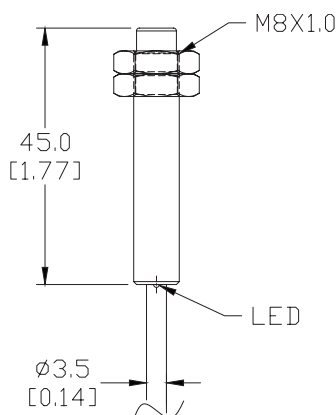


Figure 2


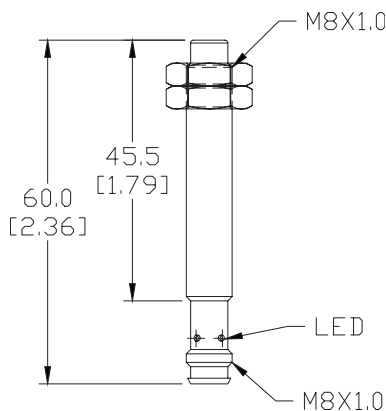


Figure 3

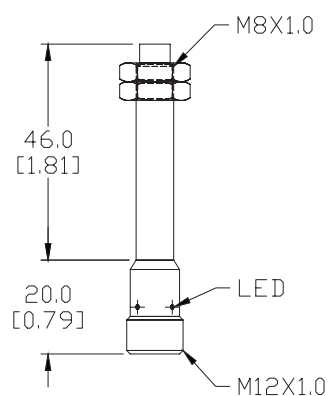

SEE OUR WEBSITE: WWW.AUTOMATIONDIRECT.COM FOR COMPLETE ENGINEERING DRAWINGS.

DW Series 8mm Stainless Steel Triple Sensing Proximity Sensors

DW Series M8 Stainless Steel Specifications	
Sensor	DW-Ax-71x-M8-x
Mounting Type	Unshielded
Nominal Sensing Distance	6mm
Operating Distance	-
Material Correction Factors	See Material Influence in the Proximity Sensor Terminology section.
Output Type	NPN or PNP, NO or NC
Operating Voltage	10 to 30 VDC
No-load Supply Current	≤ 10mA
Operating (Load) Current	≤ 100mA
Off-state (Leakage) Current	≤ 0.1 mA
Voltage Drop	≤ 2 V
Switching Frequency	≤ 700Hz
Differential Travel (% of Nominal Distance)	≤ 15%
Repeat Accuracy	0.30 mm
Ripple	≤ 20%
Time Delay Before Availability (tv)	≤ 70ms
Reverse Polarity Protection	Yes
Short-Circuit Protection	Yes
Operating Temperature	-25 to 70°C (-13 to 158°F)
Protection Degree (DIN 40050)	IP67, IP68
Indication/Switch Status	Yellow LED
Housing Material	Stainless steel
Sensing Face Material	Stainless steel
Shock/Vibration	IEC 60947-5-2/7.4
Tightening Torque	-
Weight	50g (1.73 oz), 18g (0.63 oz)
Connection	2m cable, M8 connection, M12 connection
I/O Link	-
Agency Approvals	CE, cULus E239373

Note: To obtain the most current agency approval information, see the Agency Approval Checklist section on the specific part number's web page.

Wiring diagrams

Diagram 1

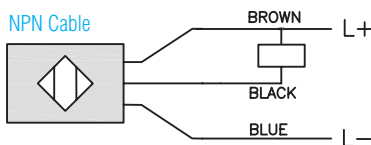


Diagram 2




Diagram 3



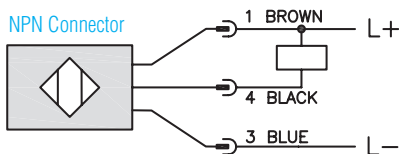


Diagram 4

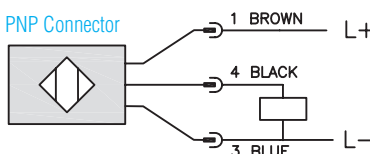


Connectors



DW Series 12mm Triple Sensing Proximity Sensors

M12 chrome plated brass – DC



- Sixteen models available
- 12mm threaded triple distance proximity sensor
- 6mm and 10mm sensing
- Complete overload protection
- IP67 rated
- Two M12 lock nuts included
- Chrome plated brass construction
- LED status indicator
- Lifetime warranty

DW Series M12 Triple Distance Inductive Prox Selection Chart									
Part Number	Price	Size	Sensing Range	Housing	Output State	Logic	Connection	Wiring	Dimensions
Triple Distance Shielded									
DW-AD-501-M12	\$53.00	M12	6mm (0.236 in)	Shielded	NO	NPN	2m (6.5 ft) axial cable	Diagram 1	Figure 1
DW-AD-503-M12	\$53.00					PNP		Diagram 2	Figure 1
DW-AS-501-M12	\$53.00					NPN	M12 quick disconnect	Diagram 3	Figure 3
DW-AS-503-M12	\$53.00					PNP		Diagram 4	Figure 3
DW-AD-502-M12	\$53.00				NC	2m (6.5 ft) axial cable	NPN	Diagram 1	Figure 1
DW-AD-504-M12	\$53.00						PNP	Diagram 2	Figure 1
DW-AS-502-M12	\$53.00					M12 quick disconnect	NPN	Diagram 3	Figure 3
DW-AS-504-M12	\$53.00						PNP	Diagram 4	Figure 3
Triple Distance Unshielded									
DW-AD-511-M12	\$57.00	M12	10mm (0.393 in)	Unshielded	NO	NPN	2m (6.5 ft) axial cable	Diagram 1	Figure 2
DW-AD-513-M12	\$57.00					PNP		Diagram 2	Figure 2
DW-AS-511-M12	\$57.00					NPN	M12 quick disconnect	Diagram 3	Figure 4
DW-AS-513-M12	\$57.00					PNP		Diagram 4	Figure 4
DW-AD-512-M12	\$57.00				NC	2m (6.5 ft) axial cable	NPN	Diagram 1	Figure 2
DW-AD-514-M12	\$57.00						PNP	Diagram 2	Figure 2
DW-AS-512-M12	\$57.00					M12 quick disconnect	NPN	Diagram 3	Figure 4
DW-AS-514-M12	\$57.00						PNP	Diagram 4	Figure 4

Wiring diagrams

Diagram 1

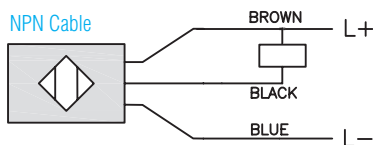


Diagram 2




Diagram 3


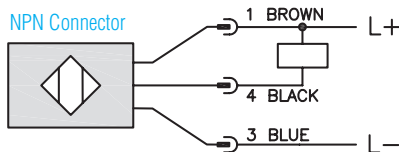


Diagram 4



Connectors

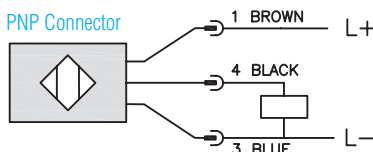

DW Series 12mm Triple Sensing Proximity Sensors

DW Series M12 Specifications		
	DW-Ax-50x-M12	DW-Ax-51x-M12
Mounting Type	shielded	unshielded
Nominal Sensing Distance	6mm	10mm
Operating Distance	-	
Material Correction Factors	See Material Influence in the Proximity Sensor Terminology section.	
Output Type	NPN or PNP, NO or NC	
Operating Voltage	10 to 30 VDC	
No-load Supply Current	≤ 10mA	
Operating (Load) Current	≤ 200mA	
Off-state (Leakage) Current	≤ 0.1 mA	
Voltage Drop	≤ 2 V	
Switching Frequency	≤ 800 Hz	≤ 400Hz
Differential Travel (% of Nominal Distance)	≤ 10%	
Repeat Accuracy	0.15 mm	0.30 mm
Ripple	≤ 20%	
Time Delay Before Availability (tv)	≤ 50ms	
Reverse Polarity Protection	Yes	
Short-Circuit Protection	Yes	
Operating Temperature	-25 to 70°C (-13 to 158°F)	
Protection Degree (DIN 40050)	IP67	
Indication/Switch Status	Yellow LED	
Housing Material	Chrome-plated brass	
Sensing Face Material	PPS (Polyphenylene sulfide)	
Shock/Vibration	IEC 60947-5-2/7.4	
Tightening Torque	-	
Weight	92g (3.25 oz), 26g (0.92 oz)	90g (3.17 oz), 25g (0.88 oz)
Connection	2m cable, M12 connection	
I/O Link	-	
Agency Approvals	CE, cULus E239373	

Note: To obtain the most current agency approval information, see the Agency Approval Checklist section on the specific part number's web page.

Dimensions

mm [inches]

Figure 1


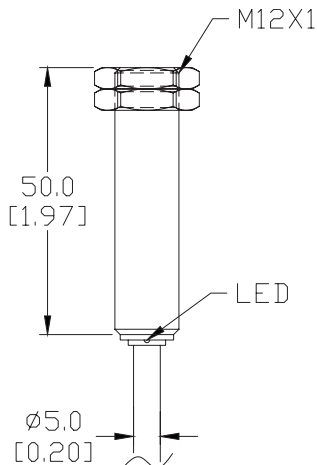


Figure 2

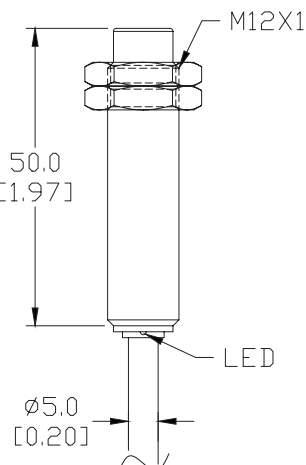

DW Series 12mm Triple Sensing Proximity Sensors

Dimensions

mm [inches]

Figure 3


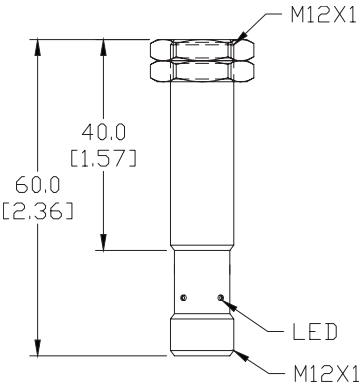


Figure 4



SEE OUR WEBSITE: WWW.AUTOMATIONDIRECT.COM FOR COMPLETE ENGINEERING DRAWINGS.

DW Series 12mm Stainless Steel Triple Sensing Proximity Sensors

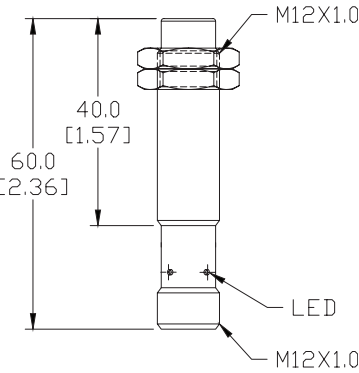

M12 stainless steel – DC

- Eight models available
- 12mm threaded triple distance proximity sensor
- 10mm sensing
- Complete overload protection
- IP68, IP69k rated



- Two M12 lock nuts included
- Stainless steel construction
- One-piece for harsh duty applications
- LED status indicator
- Lifetime warranty



DW Series 12mm Triple Distance Inductive Prox Selection Chart									
Part Number	Price	Size	Sensing Range	Housing	Output State	Logic	Connection	Wiring	Dimensions
Triple Distance									
DW-AD-711-M12	\$84.00	M12	10mm (0.393 in)	Unshielded	NO	NPN	2m (6.5') axial cable	Diagram 1	Figure 1
DW-AD-713-M12	\$84.00					PNP		Diagram 2	Figure 1
DW-AS-711-M12	\$84.00					NPN	M12 quick-disconnect	Diagram 3	Figure 2
DW-AS-713-M12	\$84.00					PNP		Diagram 4	Figure 2
DW-AD-712-M12	\$84.00				NC	2m (6.5') axial cable	NPN	Diagram 1	Figure 1
DW-AD-714-M12	\$84.00						PNP	Diagram 2	Figure 1
DW-AS-712-M12	\$84.00					M12 quick-disconnect	NPN	Diagram 3	Figure 2
DW-AS-714-M12	\$84.00						PNP	Diagram 4	Figure 2

Wiring diagrams

Diagram 1

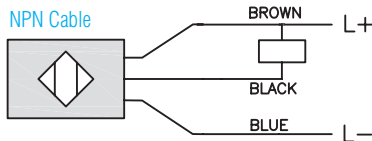


Diagram 2




Diagram 3



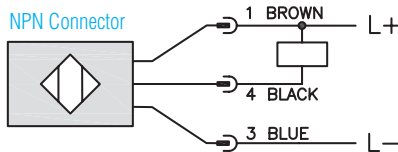


Diagram 4

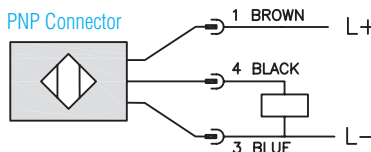

Connectors

M12 connector



DW Series 12mm Stainless Steel Triple Sensing Proximity Sensors

DW Series Specifications	
DW-Ax-71x-M12	
Mounting Type	Unshielded
Nominal Sensing Distance	10mm
Operating Distance	-
Material Correction Factors	See Material Influence in the Proximity Sensor Terminology section.
Output Type	NPN or PNP, NO or NC
Operating Voltage	10 to 30 VDC
No-load Supply Current	≤ 10mA
Operating (Load) Current	≤ 200mA
Off-state (Leakage) Current	≤ 0.1 mA
Voltage Drop	≤ 2 V
Switching Frequency	≤400 Hz
Differential Travel (% of Nominal Distance)	≤ 10%
Repeat Accuracy	0.30 mm
Ripple	≤ 20%
Time Delay Before Availability (tv)	≤70ms
Reverse Polarity Protection	Yes
Short-Circuit Protection	Yes
Operating Temperature	-25 to 70°C (-13 to 158°F)
Protection Degree (DIN 40050)	IP68, IP69K
Indication/Switch Status	Yellow LED
Housing Material	Stainless steel
Sensing Face Material	Stainless steel
Shock/Vibration	IEC 60947-5-2/7.4
Tightening Torque	-
Weight	80g (2.82 oz), 23g (0.81 oz)
Connection	2m cable, M12 connection
I/O Link	-
Agency Approvals	CE, cULus E239373

Note: To obtain the most current agency approval information, see the Agency Approval Checklist section on the specific part number's web page.

Dimensions

mm [inches]

Figure 1


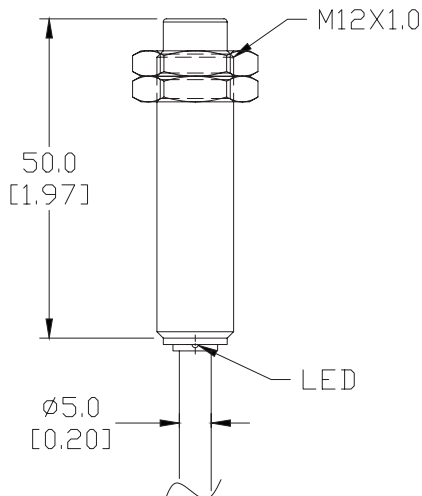


Figure 2



SEE OUR WEBSITE: WWW.AUTOMATIONDIRECT.COM FOR COMPLETE ENGINEERING DRAWINGS.

DW Series 18mm Triple Sensing Proximity Sensors

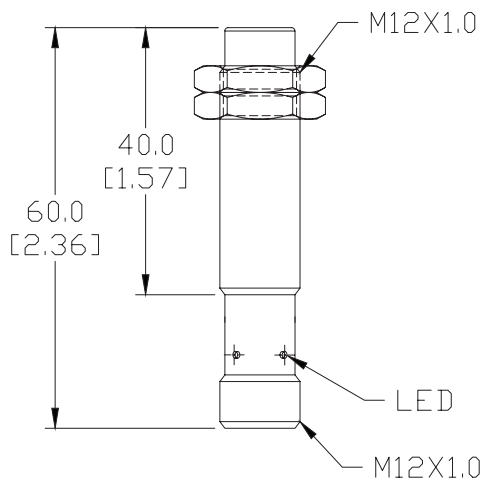

M18 (18mm) chrome plated brass – DC



- Sixteen models available
- 18mm threaded triple distance proximity sensor
- 12mm and 20mm sensing
- Complete overload protection
- IP67 rated
- Two M18 lock nuts included
- Chrome plated brass construction
- LED status indicator
- Lifetime warranty



DW Series 18mm Triple Distance Inductive Prox Selection Chart									
Part Number	Price	Size	Sensing Range	Housing	Output State	Logic	Connection	Wiring	Dimensions
Triple Distance Shielded									
DW-AD-501-M18	\$54.00	M18	12mm (0.472 in)	Shielded	NO	NPN	2m (6.5') axial cable	Diagram 1	Figure 1
DW-AD-503-M18	\$54.00					PNP		Diagram 2	Figure 1
DW-AS-501-M18-002	\$54.00					NPN	M12 quick disconnect	Diagram 3	Figure 3
DW-AS-503-M18-002	\$54.00					PNP		Diagram 4	Figure 3
DW-AD-502-M18	\$54.00				NC	NPN	2m (6.5') axial cable	Diagram 1	Figure 1
DW-AD-504-M18	\$54.00					PNP		Diagram 2	Figure 1
DW-AS-502-M18-002	\$54.00					NPN	M12 quick disconnect	Diagram 3	Figure 3
DW-AS-504-M18-002	\$54.00					PNP		Diagram 4	Figure 3
Triple Distance Unshielded									
DW-AD-511-M18	\$58.00	M18	20mm (0.787 in)	Unshielded	NO	NPN	2m (6.5') axial cable	Diagram 1	Figure 2
DW-AD-513-M18	\$58.00					PNP		Diagram 2	Figure 2
DW-AS-511-M18-002	\$58.00					NPN	M12 quick disconnect	Diagram 3	Figure 4
DW-AS-513-M18-002	\$58.00					PNP		Diagram 4	Figure 4
DW-AD-512-M18	\$58.00				NC	NPN	2m (6.5') axial cable	Diagram 1	Figure 2
DW-AD-514-M18	\$58.00					PNP		Diagram 2	Figure 2
DW-AS-512-M18-002	\$58.00					NPN	M12 quick disconnect	Diagram 3	Figure 4
DW-AS-514-M18-002	\$58.00					PNP		Diagram 4	Figure 4

Wiring diagrams

Diagram 1

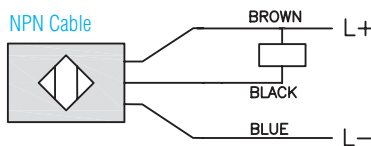


Diagram 2




Diagram 3



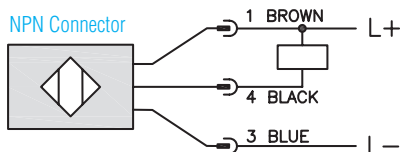


Diagram 4

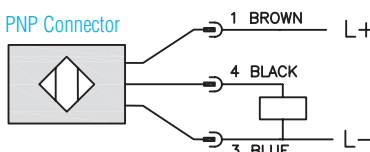

Connectors

M12 connector



DW Series 18mm Triple Sensing Proximity Sensors

DW Series Specifications		
	<i>DW-Ax-50x-M18</i>	<i>DW-Ax-51x-M18</i>
Mounting Type	Shielded	Unshielded
Nominal Sensing Distance	12mm	20mm
Operating Distance	NA	
Material Correction Factors	See Material Influence in the Proximity Sensor Terminology section.	
Output Type	NPN or PNP, NO or NC	
Operating Voltage	10 to 30 VDC	
No-load Supply Current	≤ 10mA	
Operating (Load) Current	≤ 200mA	
Off-state (Leakage) Current	≤ 0.1 mA	
Voltage Drop	≤ 2 V	
Switching Frequency	≤ 600 Hz	≤ 500Hz
Differential Travel (% of Nominal Distance)	≤ 10%	
Repeat Accuracy	0.60 mm	1.0 mm
Ripple	≤ 20%	
Time Delay Before Availability (tv)	≤40ms	≤50ms
Reverse Polarity Protection	Yes	
Short-Circuit Protection	Yes	
Operating Temperature	-25 to 70°C (-13 to 158°F)	
Protection Degree (DIN 40050)	IP67	
Indication/Switch Status	Yellow LED	
Housing Material	Chrome plated brass	
Sensing Face Material	PBT (Polybutylene terephthalate)	
Shock/Vibration	IEC 60947-5-2/7.4	
Tightening Torque	-	
Weight	130g (4.59 oz), 56g (1.98 oz)	95.2 g (3.36 oz), 31.8 g (1.12 oz)
Connection	2m cable, M12 connection	
I/O Link	-	
Agency Approvals	CE, cULus E239373	

Note: To obtain the most current agency approval information, see the Agency Approval Checklist section on the specific part number's web page.

DW Series 18mm Triple Sensing Proximity Sensors

Dimensions

mm [inches]

Figure 1

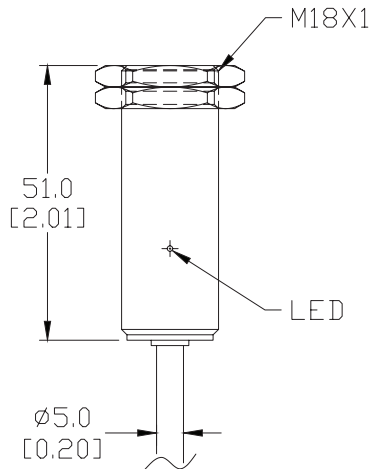


Figure 2

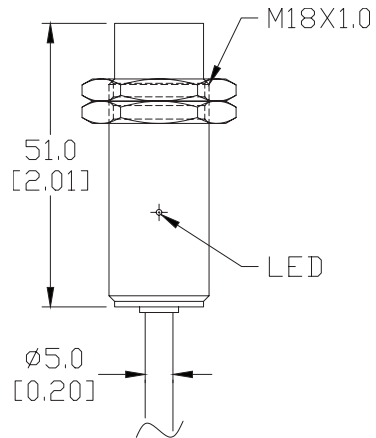


Figure 3


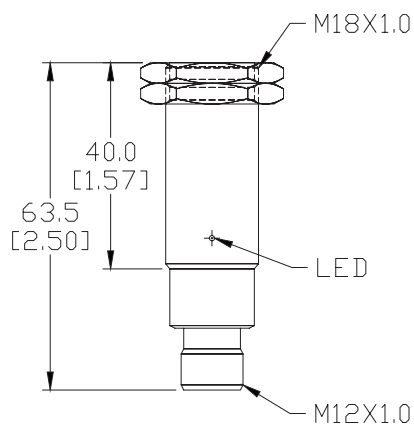


Figure 4



DW Series 18 mm Stainless Steel Triple Sensing Proximity Sensors

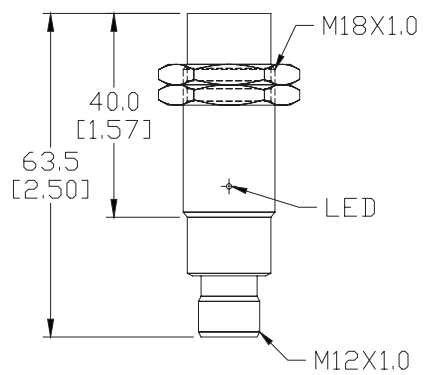

M18 (18mm) stainless steel – DC

- Eight models available
- 18mm threaded triple distance proximity sensor
- 20mm sensing
- Complete overload protection
- IP68/IP69k rated
- Two M18 lock nuts included
- Stainless steel construction
- One-piece for harsh duty applications
- LED status indicator
- Lifetime warranty



DW Series 18mm Stainless Steel Triple Distance Inductive Prox Selection Chart									
Part Number	Price	Size	Sensing Range	Housing	Output State	Logic	Connection	Wiring	Dimensions
Triple Distance									
DW-AD-711-M18	\$87.00	M18	20mm (0.787 in)	Unshielded	NO	NPN	2m (6.5') axial cable	Diagram 1	Figure 1
DW-AD-713-M18 *	\$87.00					PNP		Diagram 2	Figure 1
DW-AS-711-M18-002	\$87.00					NPN	M12 quick disconnect	Diagram 3	Figure 2
DW-AS-713-M18-002 *	\$87.00					PNP		Diagram 4	Figure 2
DW-AD-712-M18	\$87.00				NC	2m (6.5') axial cable	NPN	Diagram 1	Figure 1
DW-AD-714-M18	\$87.00						PNP	Diagram 2	Figure 1
DW-AS-712-M18-002	\$87.00					M12 quick disconnect	NPN	Diagram 3	Figure 2
DW-AS-714-M18-002	\$87.00						PNP	Diagram 4	Figure 2

*IO-Link model

Wiring diagrams

Diagram 1

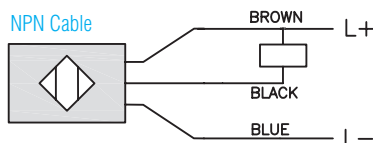


Diagram 2




Diagram 3


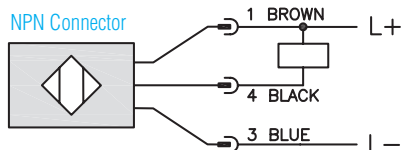


Diagram 4



Connectors

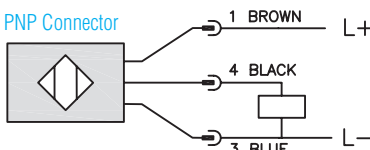

DW Series 18mm Stainless Steel Triple Sensing Proximity Sensors

DW Series 18mm Stainless Steel Specifications	
	DW-Ax-71x-M18
Mounting Type	Unshielded
Nominal Sensing Distance	20mm
Operating Distance	-
Material Correction Factors	See Material Influence in the Proximity Sensor Terminology section.
Output Type	NPN or PNP, NO or NC
Operating Voltage	10 to 30 VDC
No-load Supply Current	≤ 10mA
Operating (Load) Current	≤ 200mA
Off-state (Leakage) Current	≤ 0.1 mA
Voltage Drop	≤ 2 V
Switching Frequency	≤ 200 Hz
Differential Travel (% of Nominal Distance)	≤ 10%
Repeat Accuracy	0.60 mm
Ripple	≤ 20%
Time Delay Before Availability (tv)	≤ 15ms
Reverse Polarity Protection	Yes
Short-Circuit Protection	Yes
Operating Temperature	-25 to 85°C (-13 to 185°F)
Protection Degree (DIN 40050)	IP68, IP69K
Indication/Switch Status	Yellow LED
Housing Material	Stainless steel
Sensing Face Material	Stainless steel
Shock/Vibration	IEC 60947-5-2/7.4
Tightening Torque	-
Weight	112g (3.95 oz), 51g (1.80 oz)
Connection	2m cable, M12 connection
I/O Link	PNP/NO version only
Agency Approvals	CE, cULus E239373

Note: To obtain the most current agency approval information, see the Agency Approval Checklist section on the specific part number's web page

Dimensions

mm [inches]

Figure 1


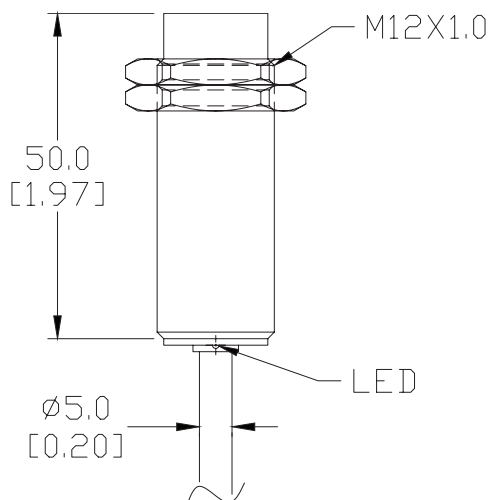


Figure 2



DW Series 30mm Triple Sensing Proximity Sensors

M30 (30mm) Chrome Plated Brass – DC

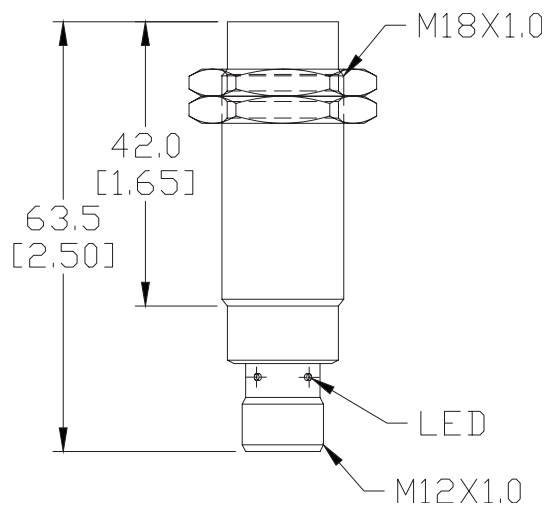

- Sixteen models available
- 30mm threaded triple distance proximity sensor
- 22mm and 40mm sensing
- Complete overload protection
- IP67 rated
- Two M30 lock nuts included
- Chrome plated brass construction
- LED status indicator
- Lifetime warranty



DW Series 30mm Stainless Steel Triple Distance Inductive Prox Selection Chart									
Part Number	Price	Size	Sensing Range	Housing	Output State	Logic	Connection	Wiring	Dimensions
Triple Distance Shielded									
DW-AD-501-M30	\$58.00	M30	22mm (0.866 in)	Shielded	NO	NPN	2m (6.5') axial cable	Diagram 1	Figure 1
DW-AD-503-M30	\$58.00					PNP		Diagram 2	Figure 1
DW-AS-501-M30-002	\$58.00					NPN	M12 quick disconnect	Diagram 3	Figure 3
DW-AS-503-M30-002	\$58.00					PNP		Diagram 4	Figure 3
DW-AD-502-M30	\$58.00				NC	NPN	2m (6.5') axial cable	Diagram 1	Figure 1
DW-AD-504-M30	\$58.00					PNP		Diagram 2	Figure 1
DW-AS-502-M30-002	\$58.00					NPN	M12 quick disconnect	Diagram 3	Figure 3
DW-AS-504-M30-002	\$58.00					PNP		Diagram 4	Figure 3
Triple Distance Unshielded									
DW-AD-511-M30	\$62.00	M30	40mm (1.574 in)	Unshielded	NO	NPN	2m (6.5') axial cable	Diagram 1	Figure 2
DW-AD-513-M30	\$62.00					PNP		Diagram 2	Figure 2
DW-AS-511-M30-002	\$62.00					NPN	M12 quick disconnect	Diagram 3	Figure 4
DW-AS-513-M30-002	\$62.00					PNP		Diagram 4	Figure 4
DW-AD-512-M30	\$62.00				NC	NPN	2m (6.5') axial cable	Diagram 1	Figure 2
DW-AD-514-M30	\$62.00					PNP		Diagram 2	Figure 2
DW-AS-512-M30-002	\$62.00					NPN	M12 quick disconnect	Diagram 3	Figure 4
DW-AS-514-M30-002	\$62.00					PNP		Diagram 4	Figure 4

Wiring diagrams

Diagram 1

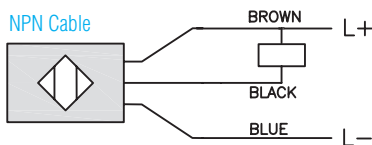


Diagram 2




Diagram 3



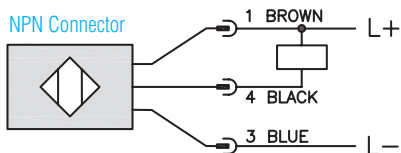


Diagram 4

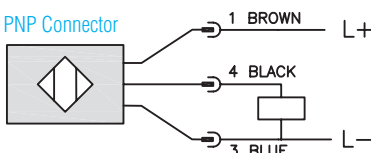

Connectors

M12 connector



DW Series 30mm Triple Sensing Proximity Sensors

DW Series Specifications		
	<i>DW-Ax-50x-M30</i>	<i>DW-Ax-51x-M30</i>
Mounting Type	shielded	unshielded
Nominal Sensing Distance	22mm	40mm
Operating Distance	NA	
Material Correction Factors	See Material Influence in the Proximity Sensor Terminology section.	
Output Type	NPN or PNP, NO or NC	
Operating Voltage	10 to 30 VDC	
No-load Supply Current	≤ 10mA	
Operating (Load) Current	≤ 200mA	
Off-state (Leakage) Current	≤ 0.1 mA	
Voltage Drop	≤ 2 V	
Switching Frequency	≤ 200 Hz	≤ 100Hz
Differential Travel (% of Nominal Distance)	≤ 10%	
Repeat Accuracy	1.1 mm	2.0 mm
Ripple	≤ 20%	
Time Delay Before Availability (tv)	≤ 200ms	
Reverse Polarity Protection	Yes	
Short-Circuit Protection	Yes	
Operating Temperature	-25 to 70°C (-13 to 158°F)	
Protection Degree (DIN 40050)	IP67	
Indication/Switch Status	Yellow LED	
Housing Material	Chrome plated brass	
Sensing Face Material	PBT (Polybutylene terephthalate)	
Shock/Vibration	IEC 60947-5-2/7.4	
Tightening Torque	--	
Weight	215g (7.58 oz), 155g (5.47 oz)	212g (7.48 oz), 143g (5.04 oz)
Connection	2m cable, M12 connection	
I/O Link	NA	
Agency Approvals	CE, cULus E239373	

Note: To obtain the most current agency approval information, see the Agency Approval Checklist section on the specific part number's web page

DW Series 30mm Triple Sensing Proximity Sensors

Dimensions

mm [inches]

Figure 1

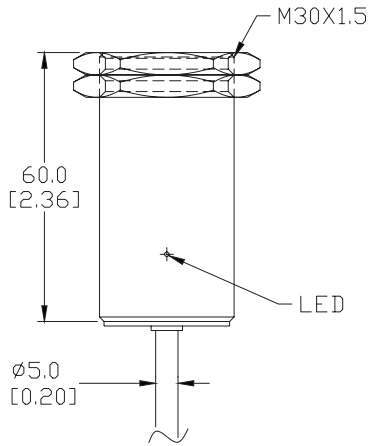


Figure 2

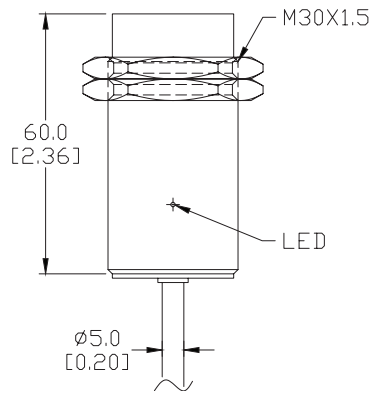


Figure 3


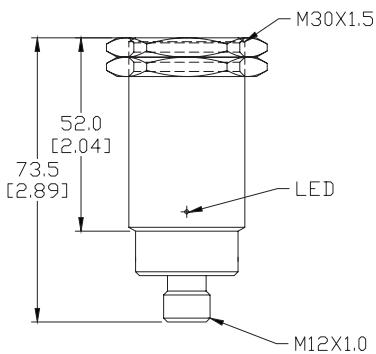


Figure 4



SEE OUR WEBSITE: WWW.AUTOMATIONDIRECT.COM FOR COMPLETE ENGINEERING DRAWINGS.

DW Series 30mm Stainless Steel Triple Sensing Proximity Sensors

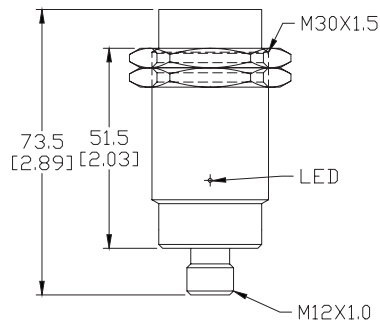

M30 (30mm) stainless steel – DC

- Eight models available
- 30mm threaded triple distance proximity sensor
- 40mm sensing
- Complete overload protection
- IP68 /IP69k rated
- Two M30 lock nuts included
- Stainless steel construction
- One-piece for harsh duty applications
- LED status indicator
- Lifetime warranty



DW Series 30mm Stainless Steel Triple Distance Inductive Prox Selection Chart									
Part Number	Price	Size	Sensing Range	Housing	Output State	Logic	Connection	Wiring	Dimensions
Triple Distance (Unshielded)									
<i>DW-AD-711-M30</i>	\$104.00	M30	40mm (1.574 in)	Unshielded	NO	NPN	2m (6.5') axial cable	Diagram 1	Figure 1
<i>DW-AD-713-M30</i>	\$104.00					PNP		Diagram 2	Figure 1
<i>DW-AS-711-M30-002</i>	\$104.00					NPN	M12 quick disconnect	Diagram 3	Figure 2
<i>DW-AS-713-M30-002</i>	\$104.00					PNP		Diagram 4	Figure 2
<i>DW-AD-712-M30</i>	\$104.00				NC	2m (6.5') axial cable	NPN	Diagram 1	Figure 1
<i>DW-AD-714-M30</i>	\$104.00						PNP	Diagram 2	Figure 1
<i>DW-AS-712-M30-002</i>	\$104.00					NPN	M12quick disconnect	Diagram 3	Figure 2
<i>DW-AS-714-M30-002</i>	\$104.00					PNP		Diagram 4	Figure 2

Wiring diagrams

Diagram 1

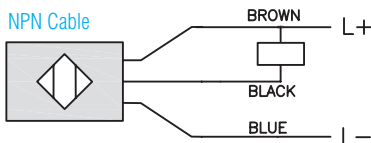


Diagram 2




Diagram 3



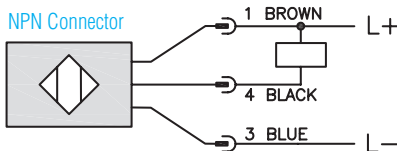


Diagram 4

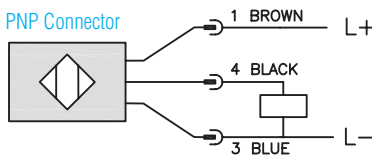

Connectors

M12 connector



DW Series 30mm Stainless Steel Triple Sensing Proximity Sensors

DW Series Specifications	DW-Ax-71x-M30
Mounting Type	unshielded
Nominal Sensing Distance	40mm
Operating Distance	NA
Material Correction Factors	See Material Influence in the Proximity Sensor Terminology section.
Output Type	NPN or PNP, NO or NC
Operating Voltage	10 to 30 VDC
No-load Supply Current	≤ 10mA
Operating (Load) Current	≤ 200mA
Off-state (Leakage) Current	≤ 0.1 mA
Voltage Drop	≤ 2 V
Switching Frequency	≤ 90 Hz
Differential Travel (% of Nominal Distance)	≤ 10%
Repeat Accuracy	2.0 mm
Ripple	≤ 20%
Time Delay Before Availability (tv)	≤ 40ms
Reverse Polarity Protection	Yes
Short-Circuit Protection	Yes
Operating Temperature	-25 to 70°C (-13 to 158°F)
Protection Degree (DIN 40050)	IP68/IP69K
Indication/Switch Status	Yellow LED
Housing Material	Stainless steel
Sensing Face Material	Stainless steel
Shock/Vibration	IEC 60947-5-2/7.4
Tightening Torque	--
Weight	196g (6.91 oz), 144g (5.08 oz)
Connection	2m cable, M12 connection
I/O Link	NA
Agency Approvals	CE, cULus E239373

Note: To obtain the most current agency approval information, see the Agency Approval Checklist section on the specific part number's web page.

Dimensions

mm [inches]

Figure 1


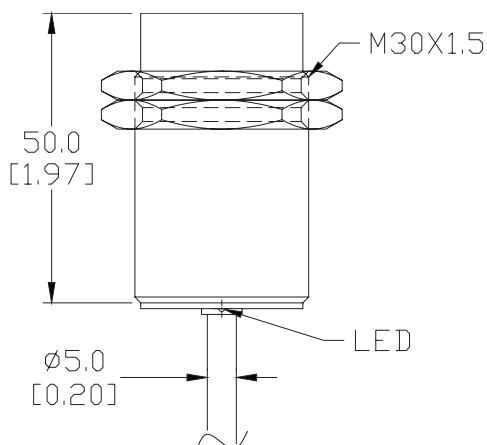



Figure 2

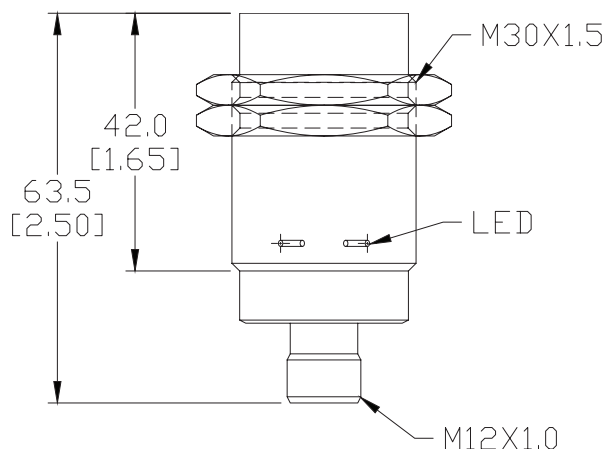

SEE OUR WEBSITE: WWW.AUTOMATIONDIRECT.COM FOR COMPLETE ENGINEERING DRAWINGS.

DW Series 20mm x 32mm Proximity Sensors

Miniature 20mm x 32mm stainless steel – DC



- Four models available
- Miniature 20mm x 32mm proximity sensor
- Complete overload protection
- IP68/IP69K-rated
- Stainless steel construction
- One-piece for harsh duty applications
- LED status indicator
- Lifetime warranty
- IO-Link models available



DW Series 20mm x 32mm Inductive Prox Selection Chart									
Part Number	Price	Size	Sensing Range	Housing	Output State	Logic	Connection	Wiring	Dimensions
Extended Distance									
DW-AD-701-C23	\$79.00	20mm x 32mm x 8mm	7mm (0.275in)	Shielded	NO	NPN	2m (6.5 ft) axial cable	Diagram 1	Figure 1
DW-AD-703-C23 *	\$79.00					PNP		Diagram 2	Figure 1
DW-AV-701-C23-276	\$79.00					NPN	M8 quick disconnect	Diagram 3	Figure 2
DW-AV-703-C23-276*	\$79.00					PNP		Diagram 4	Figure 2

*IO-Link model

DW Series Specifications	
	DW-Ax-70x-C23
Mounting Type	Unshielded
Nominal Sensing Distance	7mm
Operating Distance	NA
Material Correction Factors	See Material Influence in the Proximity Sensor Terminology section.
Output Type	NPN or PNP, NO
Operating Voltage	10 to 30 VDC
No-load Supply Current	≤ 10mA
Operating (Load) Current	≤ 200mA
Off-state (Leakage) Current	≤ 0.1 mA
Voltage Drop	≤ 2 V
Switching Frequency	≤ 180 Hz
Differential Travel (% of Nominal Distance)	≤ 10%
Repeat Accuracy	0.3 mm
Ripple	≤ 20%
Time Delay Before Availability (tv)	≤ 20ms
Reverse Polarity Protection	Yes
Short-Circuit Protection	Yes
Operating Temperature	-25 to 85°C (-13 to 185°F)
Protection Degree (DIN 40050)	IP 68 & IP69K
Indication/Switch Status	Yellow LED
Housing Material	Stainless steel
Sensing Face Material	Stainless steel
Shock/Vibration	IEC 60947-5-2/7.4
Tightening Torque	--
Weight	47g (1.66 oz), 25g (0.88 oz)
Connection	2m cable, M8 connection
I/O Link	PNP NO version only
Agency Approvals	CE, cULus E239373

Note: To obtain the most current agency approval information, see the Agency Approval Checklist section on the specific part number's web page.

DW Series 20mm x 32mm Proximity Sensors

Dimensions

mm [inches]

Figure 1


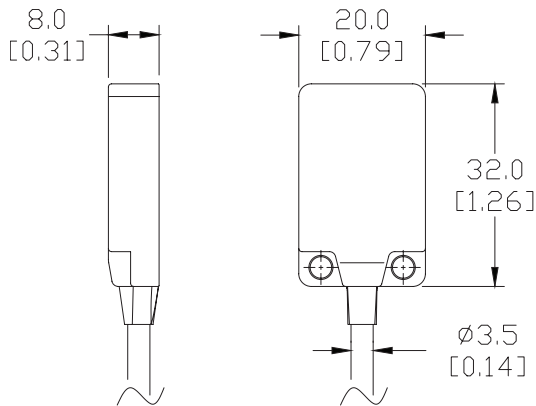


Figure 2

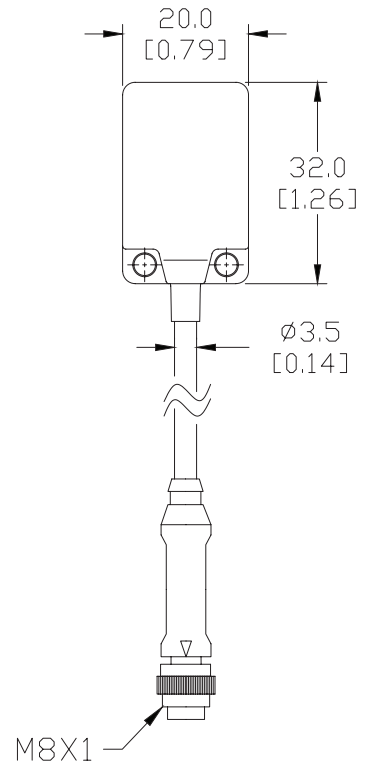

Wiring diagrams

Diagram 1

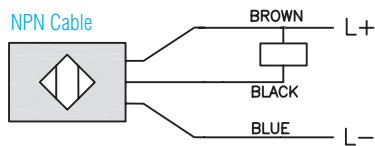


Diagram 2




Diagram 3


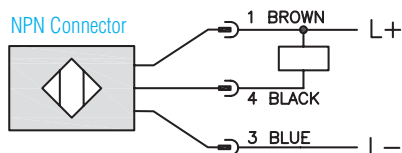


Diagram 4



Connectors

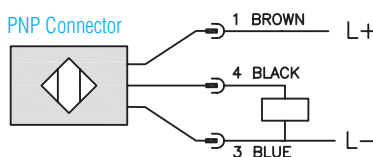

SEE OUR WEBSITE: WWW.AUTOMATIONDIRECT.COM FOR COMPLETE ENGINEERING DRAWINGS.

PNM Series Inductive Proximity Sensors

M12 (12mm) Bronze-plated Brass - DC



- Low cost/high performance
- 32 models available
- Short and regular body styles
- IP65 / IP66 / IP67 / IP68 / IP69K rated
- Axial cable / M12 quick-disconnect; purchase cable separately
- Lifetime warranty



PNM Series Inductive Prox Selection Chart (Short Body)								
Part Number	Price	Sensing Range	Housing	Output State	Logic	Connection	Wiring	Dimensions
M12 Models (short body)								
PNM6-AN-3A	\$18.75	4mm (0.16 in)	Shielded	NO	NPN	2m axial cable	Diagram 1	Figure 1
PNM6-AN-3H	\$18.75	4mm (0.16 in)	Shielded	NO	NPN	M12 (12 mm) connector	Diagram 1	Figure 2
PNM6-AN-4A	\$18.75	7mm (0.28 in)	Unshielded	NO	NPN	2m axial cable	Diagram 1	Figure 1
PNM6-AN-4H	\$18.75	7mm (0.28 in)	Unshielded	NO	NPN	M12 (12 mm) connector	Diagram 1	Figure 2
PNM6-AP-3A	\$18.75	4mm (0.16 in)	Shielded	NO	PNP	2m axial cable	Diagram 2	Figure 1
PNM6-AP-3H	\$18.75	4mm (0.16 in)	Shielded	NO	PNP	M12 (12 mm) connector	Diagram 2	Figure 2
PNM6-AP-4A	\$18.75	7mm (0.28 in)	Unshielded	NO	PNP	2m axial cable	Diagram 2	Figure 1
PNM6-AP-4H	\$18.75	7mm (0.28 in)	Unshielded	NO	PNP	M12 (12 mm) connector	Diagram 2	Figure 2
PNM6-CN-3A	\$18.75	4mm (0.16 in)	Shielded	NC	NPN	2m axial cable	Diagram 3	Figure 1
PNM6-CN-3H	\$18.75	4mm (0.16 in)	Shielded	NC	NPN	M12 (12 mm) connector	Diagram 3	Figure 2
PNM6-CN-4A	\$18.75	7mm (0.28 in)	Unshielded	NC	NPN	2m axial cable	Diagram 3	Figure 1
PNM6-CN-4H	\$18.75	7mm (0.28 in)	Unshielded	NC	NPN	M12 (12 mm) connector	Diagram 3	Figure 2
PNM6-CP-3A	\$18.75	4mm (0.16 in)	Shielded	NC	PNP	2m axial cable	Diagram 4	Figure 1
PNM6-CP-3H	\$18.75	4mm (0.16 in)	Shielded	NC	PNP	M12 (12 mm) connector	Diagram 4	Figure 2
PNM6-CP-4A	\$18.75	7mm (0.28 in)	Unshielded	NC	PNP	2m axial cable	Diagram 4	Figure 1
PNM6-CP-4H	\$18.75	7mm (0.28 in)	Unshielded	NC	PNP	M12 (12 mm) connector	Diagram 4	Figure 2

PNM Series Inductive Prox Selection Chart (Regular Body)								
Part Number	Price	Sensing Range	Housing	Output State	Logic	Connection	Wiring	Dimensions
M12 Models (regular body)								
PNM-AN-3A	\$19.75	4mm (0.16 in)	Shielded	NO	NPN	2m axial cable	Diagram 1	Figure 3
PNM-AN-3H	\$19.75	4mm (0.16 in)	Shielded	NO	NPN	M12 (12 mm) connector	Diagram 1	Figure 4
PNM-AN-4A	\$19.75	7mm (0.28 in)	Unshielded	NO	NPN	2m axial cable	Diagram 1	Figure 3
PNM-AN-4H	\$19.75	7mm (0.28 in)	Unshielded	NO	NPN	M12 (12 mm) connector	Diagram 1	Figure 4
PNM-AP-3A	\$19.75	4mm (0.16 in)	Shielded	NO	PNP	2m axial cable	Diagram 2	Figure 3
PNM-AP-3H	\$19.75	4mm (0.16 in)	Shielded	NO	PNP	M12 (12 mm) connector	Diagram 2	Figure 4
PNM-AP-4A	\$19.75	7mm (0.28 in)	Unshielded	NO	PNP	2m axial cable	Diagram 2	Figure 3
PNM-AP-4H	\$19.75	7mm (0.28 in)	Unshielded	NO	PNP	M12 (12 mm) connector	Diagram 2	Figure 4
PNM-CN-3A	\$19.75	4mm (0.16 in)	Shielded	NC	NPN	2m axial cable	Diagram 3	Figure 3
PNM-CN-3H	\$19.75	4mm (0.16 in)	Shielded	NC	NPN	M12 (12 mm) connector	Diagram 3	Figure 4
PNM-CN-4A	\$19.75	7mm (0.28 in)	Unshielded	NC	NPN	2m axial cable	Diagram 3	Figure 3
PNM-CN-4H	\$19.75	7mm (0.28 in)	Unshielded	NC	NPN	M12 (12 mm) connector	Diagram 3	Figure 4
PNM-CP-3A	\$19.75	4mm (0.16 in)	Shielded	NC	PNP	2m axial cable	Diagram 4	Figure 3
PNM-CP-3H	\$19.75	4mm (0.16 in)	Shielded	NC	PNP	M12 (12 mm) connector	Diagram 4	Figure 4
PNM-CP-4A	\$19.75	7mm (0.28 in)	Unshielded	NC	PNP	2m axial cable	Diagram 4	Figure 3
PNM-CP-4H	\$19.75	7mm (0.28 in)	Unshielded	NC	PNP	M12 (12 mm) connector	Diagram 4	Figure 4

PNK Series Inductive Proximity Sensors

M18 (18mm) Bronze-plated Brass - DC



- Low cost/high performance
- 32 models available
- Short and regular body styles
- IP65 / IP66 / IP67 / IP68 / IP69K rated
- Axial cable / M12 quick-disconnect; purchase cable separately
- Lifetime warranty



PNK Series Inductive Prox Selection Chart (Short Body)								
Part Number	Price	Sensing Range	Housing	Output State	Logic	Connection	Wiring	Dimensions
M18 Models (short body)								
PNK6-AN-3A	\$19.75	8mm (0.32 in)	Shielded	NO	NPN	2m axial cable	Diagram 1	Figure 5
PNK6-AN-3H	\$19.75	8mm (0.32 in)	Shielded	NO	NPN	M12 (12 mm) connector	Diagram 1	Figure 6
PNK6-AN-4A	\$19.75	12mm (0.47 in)	Unshielded	NO	NPN	2m axial cable	Diagram 1	Figure 5
PNK6-AN-4H	\$19.75	12mm (0.47 in)	Unshielded	NO	NPN	M12 (12 mm) connector	Diagram 1	Figure 6
PNK6-AP-3A	\$19.75	8mm (0.32 in)	Shielded	NO	PNP	2m axial cable	Diagram 2	Figure 5
PNK6-AP-3H	\$19.75	8mm (0.32 in)	Shielded	NO	PNP	M12 (12 mm) connector	Diagram 2	Figure 6
PNK6-AP-4A	\$19.75	12mm (0.47 in)	Unshielded	NO	PNP	2m axial cable	Diagram 2	Figure 5
PNK6-AP-4H	\$19.75	12mm (0.47 in)	Unshielded	NO	PNP	M12 (12 mm) connector	Diagram 2	Figure 6
PNK6-CN-3A	\$19.75	8mm (0.32 in)	Shielded	NC	NPN	2m axial cable	Diagram 3	Figure 5
PNK6-CN-3H	\$19.75	8mm (0.32 in)	Shielded	NC	NPN	M12 (12 mm) connector	Diagram 3	Figure 6
PNK6-CN-4A	\$19.75	12mm (0.47 in)	Unshielded	NC	NPN	2m axial cable	Diagram 3	Figure 5
PNK6-CN-4H	\$19.75	12mm (0.47 in)	Unshielded	NC	NPN	M12 (12 mm) connector	Diagram 3	Figure 6
PNK6-CP-3A	\$19.75	8mm (0.32 in)	Shielded	NC	PNP	2m axial cable	Diagram 4	Figure 5
PNK6-CP-3H	\$19.75	8mm (0.32 in)	Shielded	NC	PNP	M12 (12 mm) connector	Diagram 4	Figure 6
PNK6-CP-4A	\$19.75	12mm (0.47 in)	Unshielded	NC	PNP	2m axial cable	Diagram 4	Figure 5
PNK6-CP-4H	\$19.75	12mm (0.47 in)	Unshielded	NC	PNP	M12 (12 mm) connector	Diagram 4	Figure 6

PNK Series Inductive Prox Selection Chart (Regular Body)								
Part Number	Price	Sensing Range	Housing	Output State	Logic	Connection	Wiring	Dimensions
M18 Models (regular body)								
PNK-AN-3A	\$20.75	8mm (0.32 in)	Shielded	NO	NPN	2m axial cable	Diagram 1	Figure 7
PNK-AN-3H	\$20.75	8mm (0.32 in)	Shielded	NO	NPN	M12 (12 mm) connector	Diagram 1	Figure 8
PNK-AN-4A	\$20.75	12mm (0.47 in)	Unshielded	NO	NPN	2m axial cable	Diagram 1	Figure 7
PNK-AN-4H	\$20.75	12mm (0.47 in)	Unshielded	NO	NPN	M12 (12 mm) connector	Diagram 1	Figure 8
PNK-AP-3A	\$20.75	8mm (0.32 in)	Shielded	NO	PNP	2m axial cable	Diagram 2	Figure 7
PNK-AP-3H	\$20.75	8mm (0.32 in)	Shielded	N.O	PNP	M12 (12 mm) connector	Diagram 2	Figure 8
PNK-AP-4A	\$20.75	12mm (0.47 in)	Unshielded	NO	PNP	2m axial cable	Diagram 2	Figure 7
PNK-AP-4H	\$20.75	12mm (0.47 in)	Unshielded	NO	PNP	M12 (12 mm) connector	Diagram 2	Figure 8
PNK-CN-3A	\$20.75	8mm (0.32 in)	Shielded	NC	NPN	2m axial cable	Diagram 3	Figure 7
PNK-CN-3H	\$20.75	8mm (0.32 in)	Shielded	NC	NPN	M12 (12 mm) connector	Diagram 3	Figure 8
PNK-CN-4A	\$20.75	12mm (0.47 in)	Unshielded	NC	NPN	2m axial cable	Diagram 3	Figure 7
PNK-CN-4H	\$20.75	12mm (0.47 in)	Unshielded	NC	NPN	M12 (12 mm) connector	Diagram 3	Figure 8
PNK-CP-3A	\$20.75	8mm (0.32 in)	Shielded	NC	PNP	2m axial cable	Diagram 4	Figure 7
PNK-CP-3H	\$20.75	8mm (0.32 in)	Shielded	NC	PNP	M12 (12 mm) connector	Diagram 4	Figure 8
PNK-CP-4A	\$20.75	12mm (0.47 in)	Unshielded	NC	PNP	2m axial cable	Diagram 4	Figure 7
PNK-CP-4H	\$20.75	12mm (0.47 in)	Unshielded	NC	PNP	M12 (12 mm) connector	Diagram 4	Figure 8

PNT Series Inductive Proximity Sensors

M30 (30mm) Bronze-plated Brass - DC



- Low cost/high performance
- 32 models available
- Short and regular body styles
- IP65 / IP66 / IP67 / IP68 / IP69K rated
- Axial cable / M12 quick-disconnect; purchase cable separately
- Lifetime warranty



PNT Series Inductive Prox Selection Chart (Short Body)								
Part Number	Price	Sensing Range	Housing	Output State	Logic	Connection	Wiring	Dimensions
M30 Models (short body)								
PNT6-AN-3A	\$25.00	15mm (0.59 in)	Shielded	NO	NPN	2m axial cable	Diagram 1	Figure 9
PNT6-AN-3H	\$25.00	15mm (0.59 in)	Shielded	NO	NPN	M12 (12 mm) connector	Diagram 1	Figure 10
PNT6-AN-4A	\$25.00	22mm (0.87 in)	Unshielded	NO	NPN	2m axial cable	Diagram 1	Figure 9
PNT6-AN-4H	\$25.00	22mm (0.87 in)	Unshielded	NO	NPN	M12 (12 mm) connector	Diagram 1	Figure 10
PNT6-AP-3A	\$25.00	15mm (0.59in)	Shielded	NO	PNP	2m axial cable	Diagram 2	Figure 9
PNT6-AP-3H	\$25.00	15mm (0.59in)	Shielded	NO	PNP	M12 (12 mm) connector	Diagram 2	Figure 10
PNT6-AP-4A	\$25.00	22mm (0.87 in)	Unshielded	NO	PNP	2m axial cable	Diagram 2	Figure 9
PNT6-AP-4H	\$25.00	22mm (0.87 in)	Unshielded	NO	PNP	M12 (12 mm) connector	Diagram 2	Figure 10
PNT6-CN-3A	\$25.00	15mm (0.59 in)	Shielded	NC	NPN	2m axial cable	Diagram 3	Figure 9
PNT6-CN-3H	\$25.00	15mm (0.59 in)	Shielded	NC	NPN	M12 (12 mm) connector	Diagram 3	Figure 10
PNT6-CN-4A	\$25.00	22mm (0.87 in)	Unshielded	NC	NPN	2m axial cable	Diagram 3	Figure 9
PNT6-CN-4H	\$25.00	22mm (0.87 in)	Unshielded	NC	NPN	M12 (12 mm) connector	Diagram 3	Figure 10
PNT6-CP-3A	\$25.00	15mm (0.59 in)	Shielded	NC	PNP	2m axial cable	Diagram 4	Figure 9
PNT6-CP-3H	\$25.00	15mm (0.59 in)	Shielded	NC	PNP	M12 (12 mm) connector	Diagram 4	Figure 10
PNT6-CP-4A	\$25.00	22mm (0.87 in)	Unshielded	NC	PNP	2m axial cable	Diagram 4	Figure 9
PNT6-CP-4H	\$25.00	22mm (0.87 in)	Unshielded	NC	PNP	M12 (12 mm) connector	Diagram 4	Figure 10

PNT Series Inductive Prox Selection Chart (Regular Body)								
Part Number	Price	Sensing Range	Housing	Output State	Logic	Connection	Wiring	Dimensions
M30 Models (regular body)								
PNT-AN-3A	\$26.00	15mm (0.59 in)	Shielded	NO	NPN	2m axial cable	Diagram 1	Figure 11
PNT-AN-3H	\$26.00	15mm (0.59 in)	Shielded	NO	NPN	M12 (12 mm) connector	Diagram 1	Figure 12
PNT-AN-4A	\$26.00	22mm (0.87 in)	Unshielded	NO	NPN	2m axial cable	Diagram 1	Figure 11
PNT-AN-4H	\$26.00	22mm (0.87 in)	Unshielded	NO	NPN	M12 (12 mm) connector	Diagram 1	Figure 12
PNT-AP-3A	\$26.00	15mm (0.59 in)	Shielded	NO	PNP	2m axial cable	Diagram 2	Figure 11
PNT-AP-3H	\$26.00	15mm (0.59 in)	Shielded	NO	PNP	M12 (12 mm) connector	Diagram 2	Figure 12
PNT-AP-4A	\$26.00	22mm (0.87 in)	Unshielded	NO	PNP	2m axial cable	Diagram 2	Figure 11
PNT-AP-4H	\$26.00	22mm (0.87 in)	Unshielded	NO	PNP	M12 (12 mm) connector	Diagram 2	Figure 12
PNT-CN-3A	\$26.00	15mm (0.59 in)	Shielded	NC	NPN	2m axial cable	Diagram 3	Figure 11
PNT-CN-3H	\$26.00	15mm (0.59 in)	Shielded	NC	NPN	M12 (12 mm) connector	Diagram 3	Figure 12
PNT-CN-4A	\$26.00	22mm (0.87 in)	Unshielded	NC	NPN	2m axial cable	Diagram 3	Figure 11
PNT-CN-4H	\$26.00	22mm (0.87 in)	Unshielded	NC	NPN	M12 (12 mm) connector	Diagram 3	Figure 12
PNT-CP-3A	\$26.00	15mm (0.59 in)	Shielded	NC	PNP	2m axial cable	Diagram 4	Figure 11
PNT-CP-3H	\$26.00	15mm (0.59 in)	Shielded	NC	PNP	M12 (12 mm) connector	Diagram 4	Figure 12
PNT-CP-4A	\$26.00	22mm (0.87 in)	Unshielded	NC	PNP	2m axial cable	Diagram 4	Figure 11
PNT-CP-4H	\$26.00	22mm (0.87 in)	Unshielded	NC	PNP	M12 (12 mm) connector	Diagram 4	Figure 12

PN Series Inductive Proximity Sensors

PN Series Specifications	M12 Models (PNM)	M18 Models (PNK)	M30 Models (PNT)
Mounting Type	Shielded or Unshielded		
Nominal Sensing Distance	Shielded: 4mm (0.16 in) Unshielded: 7mm (0.28 in)	Shielded: 8mm (0.31 in) Unshielded: 12mm (0.47 in)	Shielded: 15mm (0.6 in) Unshielded: 22mm (0.79 in)
Operating Distance	Shielded: 0 to 3.24 mm Unshielded: 0 to 5.67 mm	Shielded: 0 to 6.48 mm Unshielded: 0 to 9.72 mm	Shielded: 0 to 12.15 mm Unshielded: 0 to 17.82 mm
Material Correction Factors	See Material Influence table #2 later in this section.		
Output Type	NPN or PNP, NO or NC		
Operating Voltage	10 to 30 VDC		
No-load Supply Current	<10 mA		
Operating (Load) Current	100mA		
Off-state (Leakage) Current	For 3-wire (< 50µ)		
Voltage Drop	<2.5 V		
Switching Frequency	700Hz	Shielded 400Hz; Unshielded 300Hz	100Hz
Differential Travel (% of Nominal Distance)	3 . . . 15		
Repeat Accuracy	< 10%		
Ripple	NA		
Time Delay Before Availability (tv)	≤ 300 mA		
Reverse Polarity Protection	Yes		
Short-circuit Protection	Yes, pulsed		
Operating Temperature	-40° to 85°C (-40° to 185°F)		
Protection Degree (DIN 40050)	IP65, IP66, IP67, IP68, IP69K		
Indication/Switch Status	Yellow (output energized), 1 LED prewired/4 LEDs for quick disconnect		
Housing Material	Housing: brass, bronze-plated; PEI; Lock nuts: brass		
Sensing Face Material	Polybutylene Terephthalate (PBT)		
Shock/Vibration	See terminology section		
Tightening Torque	Connector type: 7Nm (1.57 lb-ft) Cable type: 12Nm (2.70 lb-ft)	25 Nm (5.62 lb-ft)	50Nm (11.21 lb-ft)
Weight	NA		
Connectors	M12 connector/2m axial cable. 2 lock nuts included		
Agency Approvals	M12 Connector versions cULus file E328811, CE, RoHS; Cable versions UL file E328811, CE, RoHS		

Wiring diagrams

Diagram 1

NPN Output





Diagram 2

PNP Output



Connector

M12 connector




Diagram 3

NPN Output






Diagram 4

PNP Output



M12 connector









*Note: Use M12 4 connector cable. M12 3 connector cable will not work for normally closed units.

PN Series Inductive Proximity Sensors

Dimensions

mm [inches]

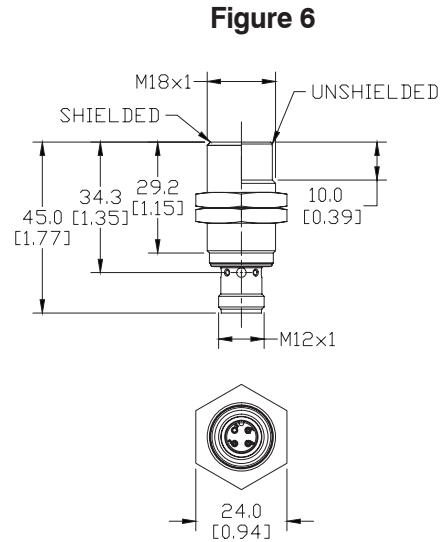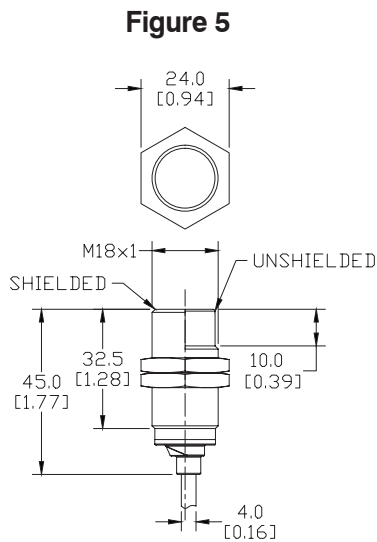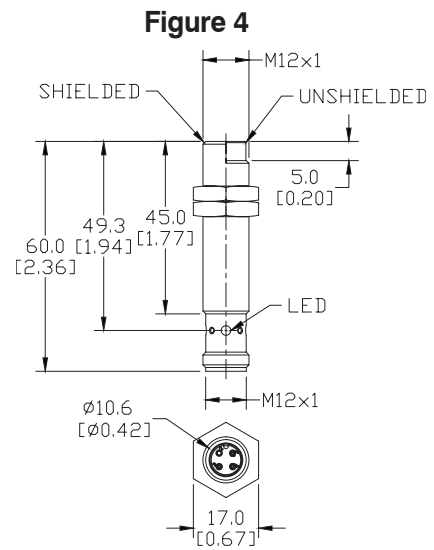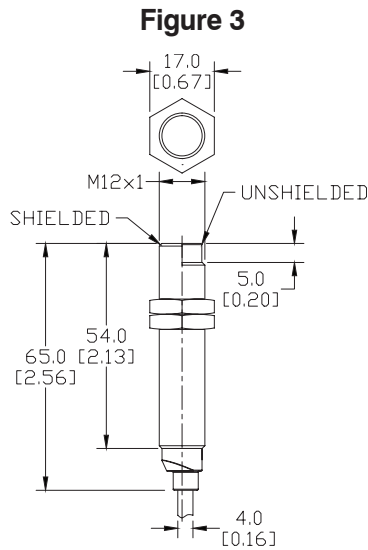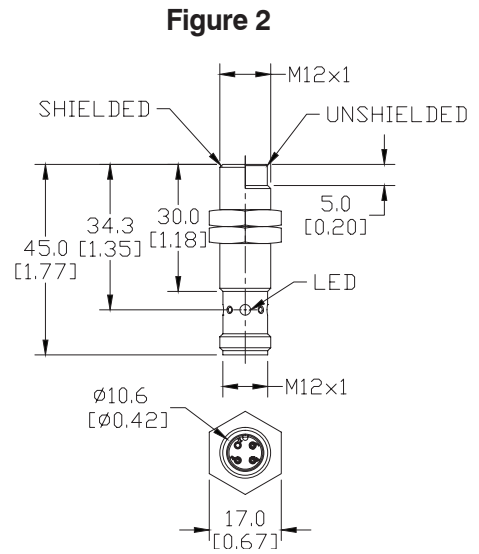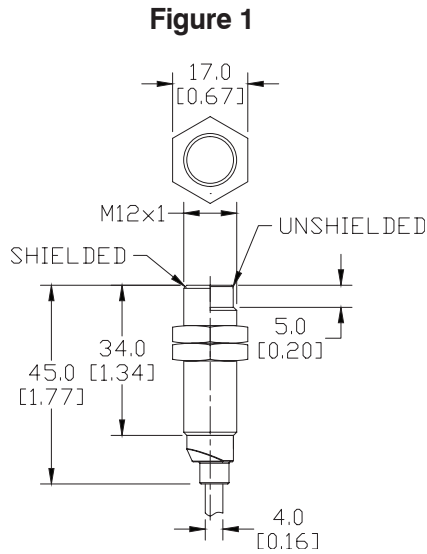

PN Series Inductive Proximity Sensors

Figure 7

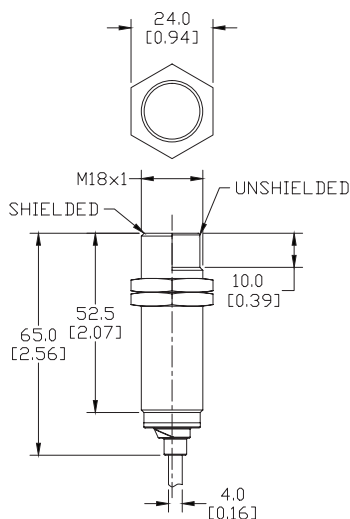


Figure 9

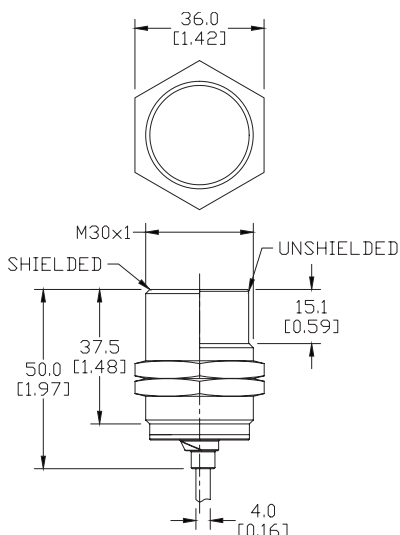


Figure 11

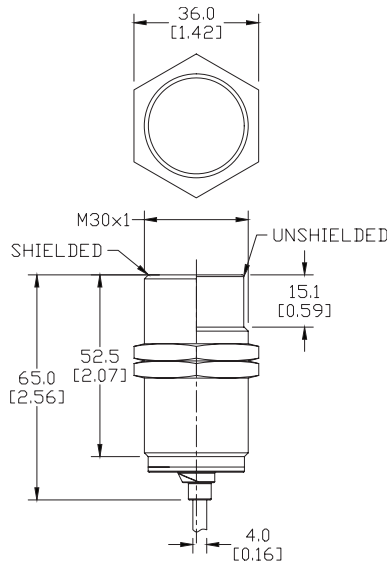


Figure 8

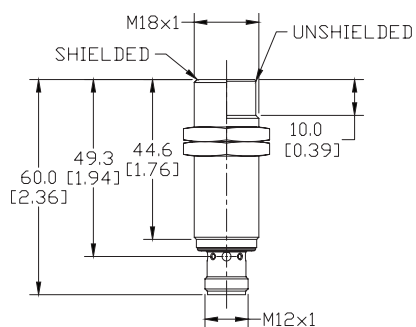


Figure 10


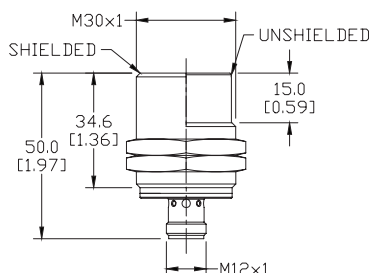


Figure 12



AM Series Inductive Proximity Sensors

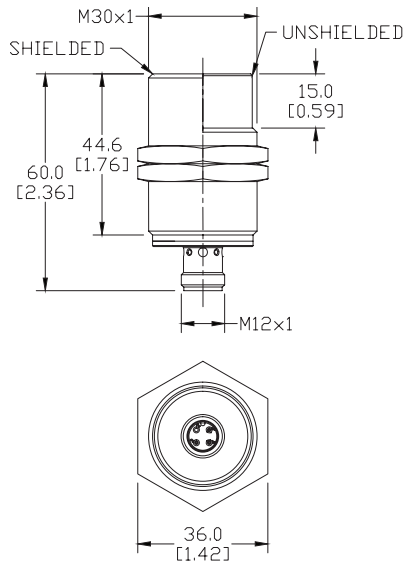

M12 (12 mm) metal – DC

- 26 standard length models available
- 8 short body length models available
- 2-wire and 3-wire models
- Metal housing
- Axial cable or M12 quick-disconnect models
- Complete overload protection
- IP67 rated
- LED status indicator
- DC powered
- Several sensing distances available
- Lifetime warranty



AM1 Series Standard Length M12 DC Inductive Prox Selection Chart								
Part Number	Price	Sensing Range	Housing	Output State	Logic	Connection	Wiring	Dimensions
Standard Distance								
AM1-AN-1A	\$20.00	0 to 2 mm (0-0.08 in)	Shielded	NO	NPN	2 m (6.5) axial cable	Diagram 1	Figure 1
AM1-AP-1A	\$20.00				PNP	2 m (6.5) axial cable	Diagram 1	Figure 1
AM1-A0-1A	\$22.00				Sink/source	2 m (6.5) axial cable	Diagram 2	Figure 1
AM1-AN-1H	\$20.00				NPN	M12 (12 mm) connector	Diagram 1	Figure 2
AM1-AP-1H	\$20.00				PNP	M12 (12 mm) connector	Diagram 1	Figure 2
AM1-A0-1H	\$22.00				Sink/source	M12 (12 mm) connector	Diagram 2	Figure 2
AM1-AN-2A	\$20.00	0 to 4 mm (0-0.157 in)	Unshielded	NO	NPN	2 m (6.5) axial cable	Diagram 1	Figure 1
AM1-AP-2A	\$20.00				PNP	2 m (6.5) axial cable	Diagram 1	Figure 1
AM1-A0-2A	\$22.00				Sink/source	2 m (6.5) axial cable	Diagram 2	Figure 1
AM1-AN-2H	\$20.00				NPN	M12 (12 mm) connector	Diagram 1	Figure 2
AM1-AP-2H	\$20.00				PNP	M12 (12 mm) connector	Diagram 1	Figure 2
AM1-A0-2H	\$22.00				Sink/source	M12 (12 mm) connector	Diagram 2	Figure 2
Extended Distance								
AM1-AN-3A	\$25.50	0 to 4 mm (0-0.157 in)	Shielded	NO	NPN	2 m (6.5) axial cable	Diagram 1	Figure 1
AM1-AP-3A	\$25.50				PNP	2 m (6.5) axial cable	Diagram 1	Figure 1
AM1-A0-3A	\$27.50				Sink/source	2 m (6.5) axial cable	Diagram 2	Figure 1
AM1-AN-3H	\$25.50				NPN	M12 (12 mm) connector	Diagram 1	Figure 2
AM1-AP-3H	\$25.50				PNP	M12 (12 mm) connector	Diagram 1	Figure 2
AM1-A0-3H	\$27.50				Sink/source	M12 (12 mm) connector	Diagram 2	Figure 2
AM1-AN-4A	\$25.50	0 to 8 mm (0-0.314 in)	Unshielded	NO	NPN	2 m (6.5) axial cable	Diagram 1	Figure 1
AM1-AP-4A	\$25.50				PNP	2 m (6.5) axial cable	Diagram 1	Figure 1
AM1-A0-4A	\$27.50				Sink/source	2 m (6.5) axial cable	Diagram 2	Figure 1
AM1-AN-4H	\$25.50				NPN	M12 (12 mm) connector	Diagram 1	Figure 2
AM1-AP-4H	\$25.50				PNP	M12 (12 mm) connector	Diagram 1	Figure 2
AM1-A0-4H	\$27.50				Sink/source	M12 (12 mm) connector	Diagram 2	Figure 2
Triple Distance								
AM1-AN-5H	\$65.00	6 mm (0.236 in)	Shielded	NO	NPN	M12 (12 mm) connector	Diagram 1	Figure 3
AM1-AP-5H	\$65.00				PNP	M12 (12 mm) connector	Diagram 1	Figure 3



AM6 Series Short Body M12 DC Inductive Prox Selection Chart								
Part Number	Price	Sensing Range	Housing	Output State	Logic	Connection	Wiring	Dimensions
Extended Distance								
AM6-AN-3A	\$31.00	0 to 4 mm (0-0.157 in)	Shielded	NO	NPN	2 m (6.5) axial cable	Diagram 1	Figure 4
AM6-AP-3A	\$31.00				PNP	2 m (6.5) axial cable	Diagram 1	Figure 4
AM6-AN-3H	\$31.00				NPN	M12 (12 mm) connector	Diagram 1	Figure 5
AM6-AP-3H	\$31.00				PNP	M12 (12 mm) connector	Diagram 1	Figure 5
AM6-AN-4A	\$31.00	0 to 8 mm (0-0.314 in)	Unshielded	NO	NPN	2 m (6.5) axial cable	Diagram 1	Figure 4
AM6-AP-4A	\$31.00				PNP	2 m (6.5) axial cable	Diagram 1	Figure 4
AM6-AN-4H	\$31.00				NPN	M12 (12 mm) connector	Diagram 1	Figure 5
AM6-AP-4H	\$31.00				PNP	M12 (12 mm) connector	Diagram 1	Figure 5

AM Series Inductive Proximity Sensors

AM Series Specifications					
Mounting Type	Standard Distance Models		Extended Distance Models		Triple Distance Models
	Shielded	Unshielded	Shielded	Unshielded	Shielded
Nominal Sensing Distance	2 mm (0.08 in)	4 mm (0.157 in)	4 mm (0.157 in)	8 mm (0.315 in)	6 mm (0.236 in)
Operating Distance	NA				
Material Correction Factors	See Material Influence table #1 later in this section				See Material Influence table #2 later in this section
Output Type	NPN or PNP/NO only/3-wire				
Operating Voltage	10 to 30 VDC				
No-load Supply Current	≤20mA		≤10mA		
Operating (Load) Current	3-wire: ≤200mA / 2-wire: 3-100mA		3-wire: ≤200mA / 2-wire: 3-100mA		≤200mA
Off-state (Leakage) Current	3-wire: ≤10µA / 2-wire: ≤0.8mA		3-wire: ≤120µA / 2-wire: ≤0.8mA		≤100µA
Voltage Drop	3-wire: 1.2 volts max. / 2-wire: 2.8 volts max.				≤2.0 V
Switching Frequency	3-wire: 2kHz / 2 wire: 1.5 kHz		3-wire: 2kHz / 2 wire: 750 kHz		800 Hz
Differential Travel (% of Nominal Distance)	2 to 10%		1 to 20		
Repeat Accuracy	≤2%		≤5%		
Ripple	≤10%				≤20%
Time Delay Before Availability (tv)	3-wire: 100ms / 2 wire: 50ms		100 ms		
Reverse Polarity Protection	Yes				
Short-Circuit Protection	Yes (switch auto-resets after overload is removed)				
Operating Temperature	-25° to +70°C (-13° to 158°F)				
Protection Degree (DIN 40050)	IEC IP67				
Indication/Switch Status	Yellow (output energized)				
Housing Material	Nickel-plated brass			Chrome-plated brass	
Sensing Face Material	Polybutylene Terephthalate (PBT)				
Shock/Vibration	See terminology section				
Tightening Torque	10 Nm (7.37 lb-ft)				
Weight (cable/M12 connector)	70 g (2.47 oz)/30 g (1.06 oz)			96 g (3.39 oz)/34 g (1.2 oz)	
Connection	2 meter PVC axial cable / M12 connector				
Agency Approvals	NA			UL file E328811	

Wiring diagrams


Diagram 1




Connector



Diagram 2



Wiring diagram when sensor is wired in sinking mode used with a sourcing module.



Wiring diagram when sensor is wired in sourcing mode used with a sinking module.

Note: Negative (-) lead is Black on M12 quick disconnect cables and Blue on axial cables.

AM Series Inductive Proximity Sensors

Dimensions

mm [inches]

Figure 1

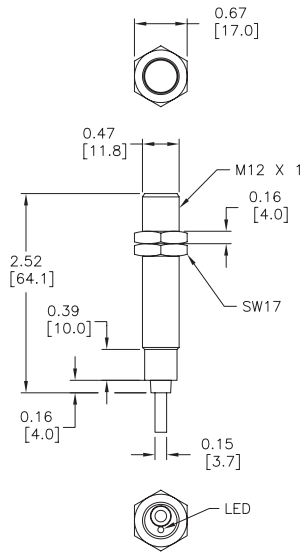


Figure 2

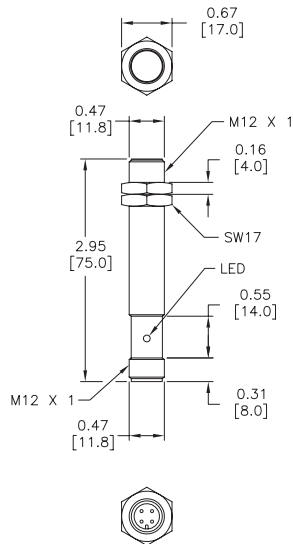


Figure 3

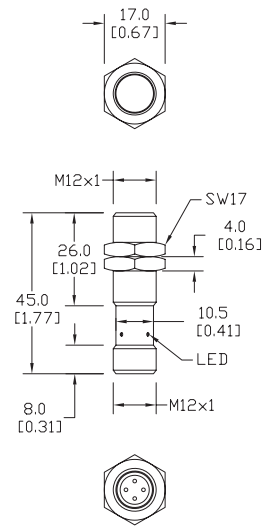


Figure 4


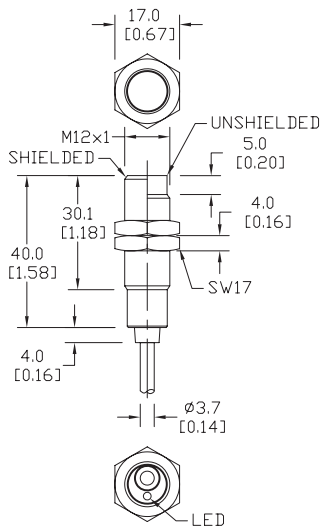


Figure 5



AK Series Inductive Proximity Sensors

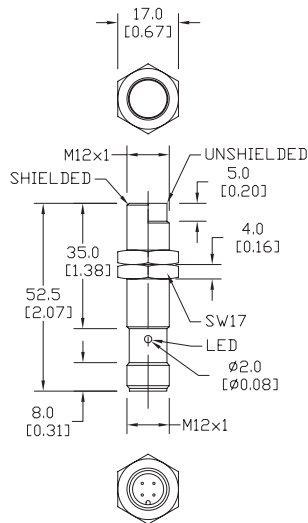

M18 (18 mm) metal – DC

- 24 models available
- Standard and extended distance models available
- 2-wire and 3-wire models
- Axial cable or M12 quick-disconnect models available
- Complete overload protection
- IP67 rated
- LED status indicators are visible 360° around the cylinder
- Lifetime warranty



AK Series M18 DC Inductive Prox Selection Chart								
Part Number	Price	Sensing Range	Housing	Output State	Logic	Connection	Wiring	Dimensions
Standard Distance								
AK1-AN-1A	\$22.00	5 mm (0.197 in)	Shielded	NO	NPN	2 m (6.5') axial cable	Diagram 1	Figure 1
AK1-AP-1A	\$22.00				PNP	2 m (6.5') axial cable	Diagram 1	Figure 1
AK1-A0-1A	\$23.00				Sink/source	2 m (6.5') axial cable	Diagram 2	Figure 1
AK1-AN-1H	\$22.00				NPN	M12 (12 mm) connector	Diagram 1	Figure 2
AK1-AP-1H	\$22.00				PNP	M12 (12 mm) connector	Diagram 1	Figure 2
AK1-A0-1H	\$23.00				Sink/source	M12 (12 mm) connector	Diagram 2	Figure 2
AK1-AN-2A	\$22.00	8 mm (0.315 in)	Unshielded	NO	NPN	2 m (6.5') axial cable	Diagram 1	Figure 1
AK1-AP-2A	\$22.00				PNP	2 m (6.5') axial cable	Diagram 1	Figure 1
AK1-A0-2A	\$23.00				Sink/source	2 m (6.5') axial cable	Diagram 2	Figure 1
AK1-AN-2H	\$22.00				NPN	M12 (12 mm) connector	Diagram 1	Figure 2
AK1-AP-2H	\$22.00				PNP	M12 (12 mm) connector	Diagram 1	Figure 2
AK1-A0-2H	\$23.00				Sink/source	M12 (12 mm) connector	Diagram 2	Figure 2
Extended Distance								
AK1-AN-3A	\$26.50	8 mm (0.315 in)	Shielded	NO	NPN	2 m (6.5') axial cable	Diagram 1	Figure 1
AK1-AP-3A	\$26.50				PNP	2 m (6.5') axial cable	Diagram 1	Figure 1
AK1-A0-3A	\$29.50				Sink/source	2 m (6.5') axial cable	Diagram 2	Figure 1
AK1-AN-3H	\$26.50				NPN	M12 (12 mm) connector	Diagram 1	Figure 2
AK1-AP-3H	\$26.50				PNP	M12 (12 mm) connector	Diagram 1	Figure 2
AK1-A0-3H	\$29.50				Sink/source	M12 (12 mm) connector	Diagram 2	Figure 2
AK1-AN-4A	\$26.50	12 mm (0.472 in)	Unshielded	NO	NPN	2 m (6.5') axial cable	Diagram 1	Figure 1
AK1-AP-4A	\$26.50				PNP	2 m (6.5') axial cable	Diagram 1	Figure 1
AK1-A0-4A	\$29.50				Sink/source	2 m (6.5') axial cable	Diagram 2	Figure 1
AK1-AN-4H	\$26.50				NPN	M12 (12 mm) connector	Diagram 1	Figure 2
AK1-AP-4H	\$26.50				PNP	M12 (12 mm) connector	Diagram 1	Figure 2
AK1-A0-4H	\$29.50				Sink/source	M12 (12 mm) connector	Diagram 2	Figure 2

Dimensions

mm [inches]

Figure 1


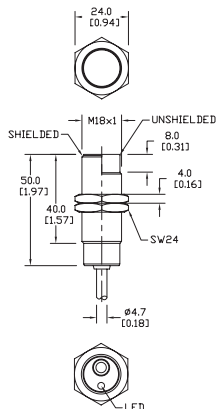


Figure 2

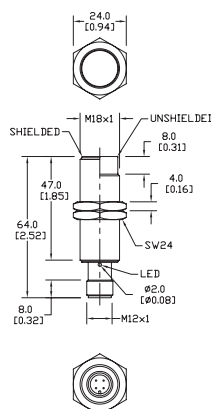


AK Series Inductive Proximity Sensors

AK Series Specifications				
Mounting Type	Standard Distance		Extended Distance	
	Shielded	Unshielded	Shielded	Unshielded
Nominal Sensing Distance	5 mm (0.197 in)	8 mm (0.315 in)	8 mm (0.315 in)	12 mm (0.472 in)
Operating Distance	NA			
Material Influence Factors	See Material Influence table #1 later in this section			
Output Type	3-wire: NPN or PNP/NO (normally open) / 2-wire: sink/source, NO only			
Operating Voltage	10 to 30 VDC			
No-load Supply Current	≤ 20 mA for 3 mins			
Operating (Load) Current	3-wire: ≤400mA / 2-wire: 3-100mA			
Off-state (Leakage) Current	3-wire: ≤10µA / 2-wire: ≤0.8mA max			
Voltage Drop	3-wire: 1 volt max. / 2-wire: ≤2.8V max.			
Switching Frequency	600 Hz	300 Hz		
Differential Travel (% of Nominal Distance)	2 to ≤10%		2 to ≤15%	
Repeat Accuracy	≤2%		≤5%	
Ripple	≤10%			
Time Delay Before Availability (tv)	3-wire: 100ms / 2-wire: -50ms			
Reverse Polarity Protection	Yes			
Short-Circuit Protection	Yes (switch auto-resets after overload is removed)			
Operating Temperature	-25° to +70°C (-13° to 158°F)			
Protection Degree (DIN 40050)	IEC IP67			
Indication/Switch Status	Yellow (NO output energized)			
Housing Material	Nickel-plated brass			
Sensing Face Material	Polybutylene Terephthalate (PBT)			
Shock/Vibration	See terminology section.			
Tightening Torque	25 Nm (18.44 lbs-ft.)			
Weight	A type (w/ cable): 130 g (4.59 oz) H type: 55 g (1.94 oz)			
Connection	2 meter PVC axial cable / M12 connector			
Agency Approvals	NA			


Wiring diagrams

Diagram 1

NPN Output



PNP Output



Connector

M12 connector






Diagram 2

Sink/Source Output



Wiring diagram when sensor is wired in sinking mode used with a sourcing module.

Sink/Source Output



Wiring diagram when sensor is wired in sourcing mode used with a sinking module.

Note: Negative (-) lead is Black on M12 quick disconnect cables and Blue on axial cables.

AT Series Inductive Proximity Sensors

M30 (30 mm) metal – DC





- 24 models available
- Standard and extended distance models available
- 2-wire and 3-wire models
- Axial cable or M12 quick-disconnect models
- LED status indicators are visible 360° around the cylinder
- Complete overload protection
- IP67 rated
- Lifetime warranty



AT Series M30 DC Inductive Prox Selection Chart								
Part Number	Price	Sensing Range	Housing	Output State	Logic	Connection	Wiring	Dimensions
Standard Distance								
AT1-AN-1A	\$26.50	10 mm (0.394 in)	Shielded	NO	NPN	2 m (6.5') axial cable	Diagram 1	Figure 1
AT1-AP-1A	\$26.50				PNP	2 m (6.5') axial cable	Diagram 1	Figure 1
AT1-AO-1A	\$32.50				Sink/source	2m (6.5') axial cable	Diagram 2	Figure 1
AT1-AN-1H	\$26.50				NPN	M12 (12 mm) connector	Diagram 1	Figure 2
AT1-AP-1H	\$26.50				PNP	M12 (12 mm) connector	Diagram 1	Figure 2
AT1-AO-1H	\$37.00				Sink/source	M12 (12mm) connector	Diagram 2	Figure 2
AT1-AN-2A	\$26.50	15 mm (0.591 in)	Unshielded	NO	NPN	2 m (6.5') axial cable	Diagram 1	Figure 1
AT1-AP-2A	\$26.50				PNP	2 m (6.5') axial cable	Diagram 1	Figure 1
AT1-AO-2A	\$32.50				Sink/source	2 m (6.5') axial cable	Diagram 2	Figure 1
AT1-AN-2H	\$26.50				NPN	M12 (12 mm) connector	Diagram 1	Figure 2
AT1-AP-2H	\$26.50				PNP	M12 (12 mm) connector	Diagram 1	Figure 2
AT1-AO-2H	\$37.00				Sink/source	M12 (12 mm) connector	Diagram 2	Figure 2
Extended Distance								
AT1-AN-3A	\$32.50	15 mm (0.591 in)	Shielded	NO	NPN	2 m (6.5') axial cable	Diagram 1	Figure 1
AT1-AP-3A	\$32.50				PNP	2 m (6.5') axial cable	Diagram 1	Figure 1
AT1-AO-3A	\$36.00				Sink/source	2 m (6.5') axial cable	Diagram 2	Figure 1
AT1-AN-3H	\$32.50				NPN	M12 (12 mm) connector	Diagram 1	Figure 2
AT1-AP-3H	\$32.50				PNP	M12 (12 mm) connector	Diagram 1	Figure 2
AT1-AO-3H	\$36.00				Sink/source	M12 (12 mm) connector	Diagram 2	Figure 2
AT1-AN-4A	\$32.50	20 mm (0.787 in)	Unshielded	NO	NPN	2 m (6.5') axial cable	Diagram 1	Figure 1
AT1-AP-4A	\$32.50				PNP	2 m (6.5') axial cable	Diagram 1	Figure 1
AT1-AO-4A	\$36.00				Sink/source	2 m (6.5') axial cable	Diagram 2	Figure 1
AT1-AN-4H	\$32.50				NPN	M12 (12 mm) connector	Diagram 1	Figure 2
AT1-AP-4H	\$32.50				PNP	M12 (12 mm) connector	Diagram 1	Figure 2
AT1-AO-4H	\$36.00				Sink/source	M12 (12 mm) connector	Diagram 2	Figure 2

Dimensions

mm[inches]

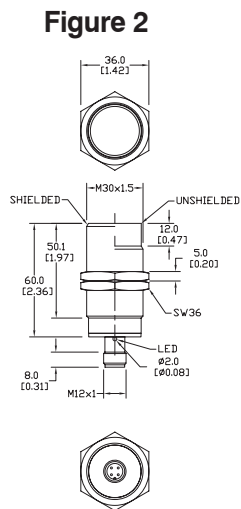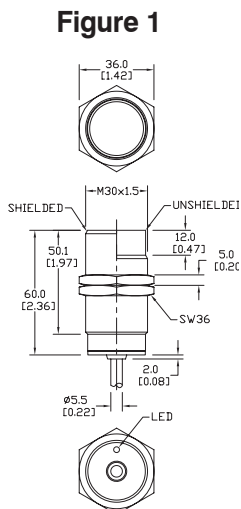


AT Series Inductive Proximity Sensors

AT Series Specifications				
Mounting Type	Standard Distance Models		Extended Distance Models	
	Shielded	Unshielded	Shielded	Unshielded
Nominal Sensing Distance	10 mm (0.394 in)	15 mm (0.591 in)	15 mm (0.591 in)	20 mm (0.787 in)
Operating Distance	NA			
Material Correction Factors	See Material Influence table #1 later in this section			
Output Type	Three wire: NPN or PNP/NO (normally open) / Two wire: sink/source, NO only			
Operating Voltage	10 to 30 VDC			
No-load Supply Current	≤ 20 mA for 3 mins			
Operating (Load) Current	3 wire: ≤400mA / 2-wire: 3-100mA		2-wire and 3-wire: ≤400mA	
Off-state (Leakage) Current	3-wire: ≤10µA / 2-wire: ≤0.8mA max.		3-wire ≤8µA / 2-wire: ≤0.8mA max.	
Voltage Drop	3-wire: ≤1 volt max. / 2-wire: ≤2.8V≤10%		3-wire: ≤1 volt max. / 2-wire: ≤2.8V	
Switching Frequency	3-wire: 200Hz / 2-wire: 150Hz		2-and 3-wire:150Hz	
Differential Travel	2 to 10%		2 to 15%	
Repeat Accuracy	3-wire: 2% / 2-wire: 5%		2-wire and 3-wire: 5%	
Ripple	≤10%			
Time Delay Before Availability (tv)	3-wire: 100ms / 2-wire: 50ms		3-wire:100ms / 2-wire: 50ms	
Reverse Polarity Protection	Yes			
Short-Circuit Protection	Yes (switch auto-resets after overload is removed)			
Operating Temperature	-25° to + 70°C (-13° to 158°F); drift: 10% Sr			
Protection Degree (DIN 40050)	IEC IP67			
Indication/Switch Status	Yellow (NO output energized)			
Housing Material	Nickel-plated brass			
Sensing Face Material	Polybutylene Terephthalate (PBT)			
Shock/Vibration	See terminology section.			
Tightening Torque	50 Nm (36.88 lbs-ft.)			
Weight	A type (w/ cable): 180 g (6.35 oz) H type: 110 g (3.88 oz)			
Connection	2 meter axial cable or M12 connector			
Agency Approvals	NA			

Wiring diagrams

Diagram 1

NPN Output



PNP Output






Diagram 2

Sink/Source Output



Wiring diagram when sensor is wired in sinking mode used with a sourcing module.

Sink/Source Output




Wiring diagram when sensor is wired in sourcing mode used with a sinking module.

Note: Negative (-) lead is Black on M12 quick disconnect cables and Blue on axial cables.

Connector

M12 connector



PB Series Inductive Proximity Sensors

Nickel-plated Brass - DC



PBT-AN-1H PBT-AN-2H

- Low cost/high performance
- Twelve models available
- IP67 rated
- LED status indicators
- M12 quick-disconnect; purchase cable separately
- Lifetime warranty



Basic Series Inductive Prox Selection Chart								
Part Number	Price	Sensing Range	Housing	Output State	Logic	Connection	Wiring	Dimensions
M12 Models								
PBM-AN-1H	\$13.50	2 mm (0.08 in)	Shielded	NO	NPN	M12 (12 mm) connector	Diagram 1	Figure 1
PBM-AP-1H	\$13.50				PNP	M12 (12 mm) connector	Diagram 2	
PBM-AN-2H	\$13.50	4 mm (0.157 in)	Unshielded		NPN	M12 (12 mm) connector	Diagram 1	
PBM-AP-2H	\$13.50				PNP	M12 (12 mm) connector	Diagram 2	
M18 Models								
PBK-AN-1H	\$14.00	5 mm (0.197 in)	Shielded	NO	NPN	M12 (12 mm) connector	Diagram 1	Figure 2
PBK-AP-1H	\$14.00				PNP	M12 (12 mm) connector	Diagram 2	
PBK-AN-2H	\$14.00	8 mm (0.315 in)	Unshielded		NPN	M12 (12 mm) connector	Diagram 1	
PBK-AP-2H	\$14.00				PNP	M12 (12 mm) connector	Diagram 2	
M30 Models								
PBT-AN-1H	\$16.50	10 mm (0.394 in)	Shielded	NO	NPN	M12 (12 mm) connector	Diagram 1	Figure 3
PBT-AP-1H	\$16.50				PNP	M12 (12 mm) connector	Diagram 2	
PBT-AN-2H	\$16.50	15 mm (0.590 in)	Unshielded		NPN	M12 (12 mm) connector	Diagram 1	
PBT-AP-2H	\$16.50				PNP	M12 (12 mm) connector	Diagram 2	

Wiring diagrams

Diagram 1

NPN Output





Diagram 2

PNP Output



Connector

M12 connector



PB Series Inductive Proximity Sensors

PB Series Specifications	M12 Models		M18 Models		M30 Models	
Mounting Type	Shielded	Unshielded	Shielded	Unshielded	Shielded	Unshielded
Nominal Sensing Distance	2 mm (0.08 in)	4 mm (0.157 in)	5 mm (0.197 in)	8 mm (0.315 in)	10 mm (0.394 in)	15 mm (0.590 in)
Operating Distance	NA					
Material Correction Factors	See Material Influence table #2 later in this section.					
Output Type	NPN or PNP, NO only					
Operating Voltage	15 to 30 VDC					
No-load Supply Current	<15 mA					
Operating (Load) Current	100 mA					
Off-state (Leakage) Current	<0.1 mA					
Voltage Drop	<2.5 V					
Switching Frequency	800Hz		400Hz	300Hz		200Hz
Differential Travel (% of Nominal Distance)	NA					
Repeat Accuracy	NA					
Ripple	NA					
Time Delay Before Availability (tv)	NA					
Reverse Polarity Protection	Yes					
Short-circuit Protection	Yes, pulsed					
Operating Temperature	-25° to 70°C (-13° to 158°F)					
Protection Degree (DIN 40050)	IEC IP67					
Indication/Switch Status	Yellow (output energized)					
Housing Material	Housing: brass, nickel-plated; Lock nuts: brass					
Sensing Face Material	Polybutylene Terephthalate (PBT)					
Shock/Vibration	See terminology section					
Tightening Torque	7.0 Nm (5.16 lb-ft)		35.0 Nm (25.8 lb-ft)		50.0 Nm (36.8 lb-ft)	
Weight	1.70 g (0.06 oz)		2.83 g (0.10 oz)		8.50 g (0.30 oz)	5.70 g (0.20 oz)
Connectors	M12 connector. 2 lock nuts included					
Agency Approvals	cULus file E328811, CE, RoHS					

Dimensions

mm [inches]

Figure 1

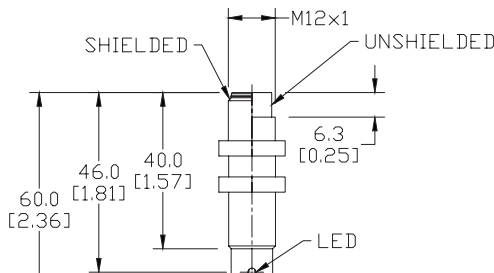


Figure 2


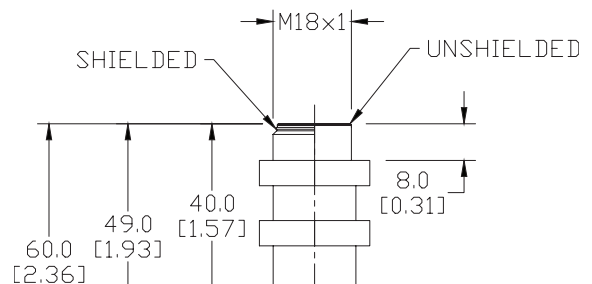


Figure 3



PEW Series Inductive Proximity Sensors

M8 (8 mm) stainless steel - DC

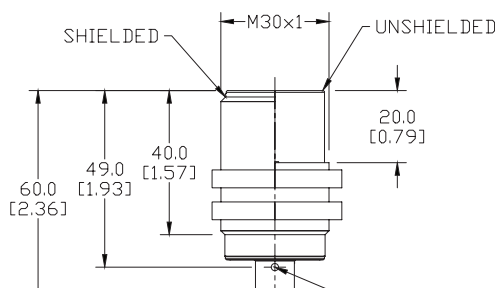

PEW-AP-1H

- Four flush-mountable models available
- Low cost/high performance
- Metal sensing face for extreme environments
- LED status indicators are visible at a wide angle.
- Sensing face withstands up to 1450 psi.
- M8 or M12 quick-disconnect models
- 2 M8 stainless steel lock nuts included
- Purchase cable separately
- Lifetime warranty



PEW Series DC Inductive Prox Selection Chart								
Part Number	Price	Sensing Range	Housing	Output State	Logic	Connection	Wiring	Dimensions
Extended Distance								
PEW-AN-1F	\$45.00	2 mm (0.08 in)	Shielded	NO	NPN	M8 (8 mm) quick disconnect	Diagram 1	Figure 1
PEW-AP-1F	\$45.00	2 mm (0.08 in)	Shielded	NO	PNP	M8 (8 mm) quick disconnect	Diagram 2	Figure 1
PEW-AN-1H	\$45.00	2 mm (0.08 in)	Shielded	NO	NPN	M12 (12 mm) quick disconnect	Diagram 1	Figure 2
PEW-AP-1H	\$45.00	2 mm (0.08 in)	Shielded	NO	PNP	M12 (12 mm) quick disconnect	Diagram 2	Figure 2

Wiring diagrams

Diagram 1






Diagram 2




Connectors

M8 connector



M12 connector



Dimensions mm[inches]

Figure 1


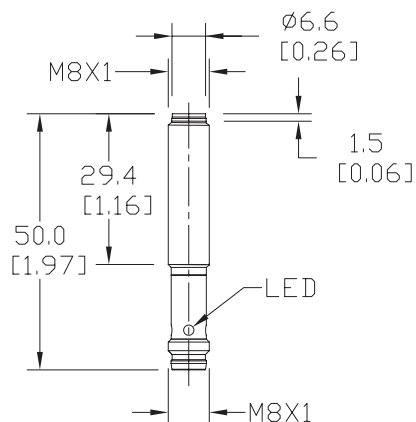


Figure 2

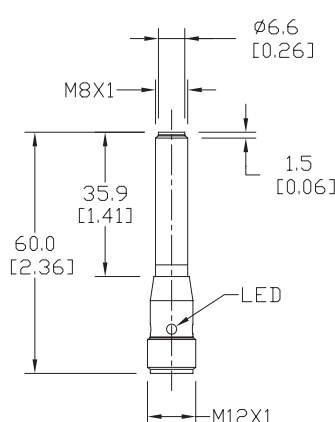

PEW Series Inductive Proximity Sensors

Specifications	PEW-AN-1F	PEW-AP-1F	PEW-AN-1H	PEW-AP-1H
Mounting Type	Shielded			
Nominal Sensing Distance	2 mm (0.08 in) ± 10%			
Operating Distance	0 to 1.6 mm (0.06 in)			
Material Correction Factors	See Material Influence table #2 later in this section.			
Output Type	NPN, NO only	PNP, NO only	NPN, NO only	PNP, NO only
Operating Voltage	10 to 36 VDC			
No-load Supply Current	< 20 mA			
Operating (Load) Current	100 mA			
Off-state (Leakage) Current	< 0.1 mA			
Voltage Drop	<2.5 V			
Switching Frequency	100 Hz			
Differential Travel (% of nominal Distance)	1 to 20% of Sr		1 to 15% of Sr	
Repeat Accuracy	NA			
Ripple	NA			
Reverse Polarity Protection	Yes			
Short-Circuit Protection	Yes (non-latching)			
Operating Temperature	-25° to 70°C (-13° to 158°F)			
Protection Degree (DIN 40050)	IEC IP67		IEC IP67/68	
Indication/Switch Status	4 Yellow			
Housing Material	316L stainless steel			
Sensing Face Material	316L stainless steel			
Shock/Vibration	See terminology section			
Tightening Torque	3.5 Nm (2.58 lb-ft)			
Weight	18 g (0.63 oz)		20 g (0.71 oz)	
Connection	M8 plug with gold-plated pins		M12 plug with gold-plated pins	
Agency Approvals	cULus file E328811, CE, RoHS			

PMW Series Inductive Proximity Sensors

M12 (12 mm) stainless steel – DC



- Twelve models available
- Low cost/high performance
- LED status indicators are visible at a wide angle.
- Triple distance models (shown) sense all metals at virtually the same distance, have one-piece stainless design, and are fully submersible up to 290 psi.
- Axial cable or M12 quick-disconnect models
- Purchase cable separately (for quick-disconnect models).
- Lifetime warranty



PMW Series M12 DC Inductive Prox Selection Chart								
Part Number	Price	Sensing Range	Housing	Output State	Logic	Connection	Wiring	Dimensions
Standard Distance								
PMW-ON-1H	\$38.50	2 mm (0.08 in)	Shielded	NO/N.C	NPN	M12 (12 mm) connector	Diagram 3	Figure 1
PMW-OP-1H	\$38.50				PNP	M12 (12 mm) connector	Diagram 4	Figure 1
PMW-AN-1H	\$45.00	3 mm (0.118 in)		NO	NPN	M12 (12 mm) connector	Diagram 1	Figure 4
PMW-AP-1H	\$47.00				PNP	M12 (12 mm) connector	Diagram 2	Figure 4
Extended Distance								
PMW-ON-2H	\$38.50	4 mm (0.157 in)	Unshielded	NO/N.C	NPN	M12 (12 mm) connector	Diagram 3	Figure 1
PMW-OP-2H	\$38.50				PNP	M12 (12 mm) connector	Diagram 4	Figure 1
PMW-AN-2H	\$49.00	6 mm (0.236 in)		NO	NPN	M12 (12 mm) connector	Diagram 1	Figure 5
PMW-AP-2H	\$49.00				PNP	M12 (12 mm) connector	Diagram 2	Figure 5
Triple Distance								
PMW-AN-5A	\$84.00	6 mm (0.236 in)	Shielded	NO	NPN	2 m (6.5') axial cable	Diagram 1	Figure 2
PMW-AP-5A	\$84.00				PNP	2 m (6.5') axial cable	Diagram 2	Figure 2
PMW-AN-5H	\$84.00				NPN	M12 (12 mm) connector	Diagram 1	Figure 3
PMW-AP-5H	\$84.00				PNP	M12 (12 mm) connector	Diagram 2	Figure 3

Wiring diagrams

Diagram 1




Diagram 2




Diagram 3






Diagram 4



Connector

M12 connector



Note: Pin 2 is not present on some models.

PMW Series Inductive Proximity Sensors

Specifications	Standard Distance Models	Extended Distance Models	Triple Distance Models	PMW-A*-1H	PMW-A*-2H	
Mounting Type	Shielded	Unshielded	Shielded	Shielded	Unshielded	
Nominal Sensing Distance	2 mm (0.08 in) ¹	4 mm (0.157 in) ¹	6 mm (0.236 in)	3 mm (0.118 in)	6 mm (0.236 in)	
Operating Distance	NA			0 to 2.4 mm (0.09 in)	0 to 4.9 mm (0.19 in)	
Material Correction Factors	See Material Influence Table 2 later in this section.					
Output Type	NPN or PNP and NO/NC complementary		NPN or PNP, NO only	NPN or PNP, NO only		
Operating Voltage	10 to 30 VDC			10 to 36 VDC		
No-load Supply Current	≤15 mA		≤10 mA	≤20 mA	≤25 mA	
Operating (Load) Current	≤100 mA		≤200 mA	≤100 mA	≤100 mA	
Off-state (Leakage) Current	≤10µA			≤100µA		
Voltage Drop	≤1.2 V		≤2.0 V	<2.5 V		
Switching Frequency	2k Hz		400 Hz	100 Hz	500 Hz	
Differential Travel (% of Nominal Distance)	2 to 10%		≤15%	≤20%		
Repeat Accuracy	≤5%			Not available		
Ripple	≤10%		≤20%	Not available		
Time Delay Before Availability (tv)	100 ms		≤10 ms	negligible		
Reverse Polarity Protection	Yes					
Short-circuit Protection	Yes					
Operating Temperature / Temperature Drift	-25° to 70°C (-13° to 158°F) / 10%/Sr			-25° to 70°C (-13° to 158°F) / 20%/Sr	0° to 100°C (32° to 212°F)	
Protection Degree (DIN 40050)	IEC IP67/68		IEC IP67 ² (connector/IP68 ² (cable))	IEC IP67/68	IEC IP65/67/68/69K	
Indication/Switch Status	Yellow (NO output energized)					
Housing Material	Stainless steel		Stainless steel	Stainless steel. 2 lock nuts included.		
Sensing Face Material	PPS		Stainless steel	Stainless steel		
Shock/Vibration	See terminology section					
Tightening Torque	10 Nm (7.25 lb-in)			20 Nm (14.5 lb-in)		
Weight	35 g (1.23 oz)		89 g (3.14 oz)	29 g (1.023 oz.)	30 g (1.058 oz.)	
Connections	M12 connector with gold-plated contacts					
Agency Approvals	NA		UL file E328811, RoHS	cULus file E328811, CE, RoHS		

Notes: ¹With 12 x 12mm FE360 target ²Fully submersible to 290 psi.

Dimensions mm[inches]

Figure 1

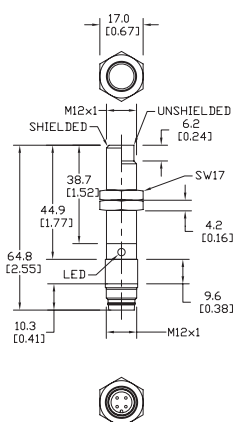


Figure 2

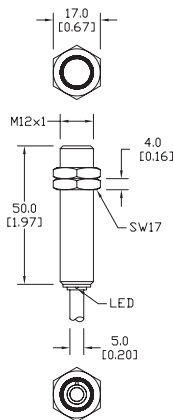


Figure 3

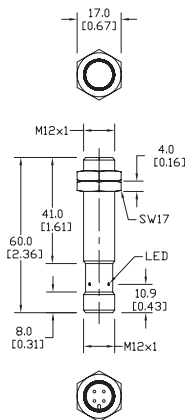


Figure 4


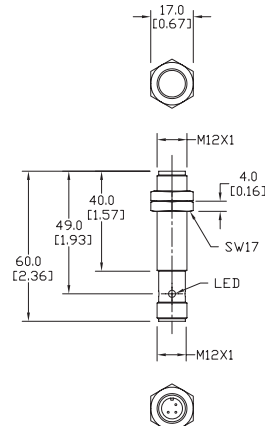


Figure 5

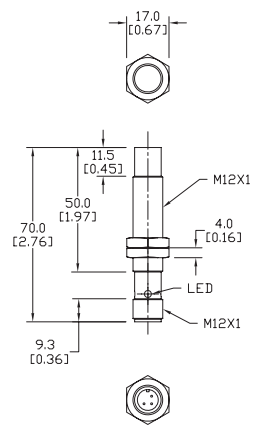


Note: Pin 2 is not present on some models.

PKW Series Inductive Proximity Sensors

M18 (18 mm) stainless steel - DC



- Twelve models available
- Low cost/high performance
- LED status indicators are visible at a wide angle.
- Triple distance models (shown) sense all metals at virtually the same distance, have one-piece stainless design, and are fully submersible up to 290 psi.
- Axial cable or M12 quick-disconnect models
- Purchase cable separately (for quick-disconnect models).
- Lifetime warranty



PKW Series M18 DC Inductive Prox Selection Chart								
Part Number	Price	Sensing Range	Housing	Output State	Logic	Connection	Wiring	Dimensions
Standard Distance								
PKW-ON-1H	\$41.50	5 mm (0.197 in)	Shielded	NO/N.C	NPN	M12 (12 mm) connector	Diagram 3	Figure 1
PKW-OP-1H	\$41.50				PNP	M12 (12 mm) connector	Diagram 4	Figure 1
PKW-AN-1H	\$47.00	5 mm (0.197 in)	Shielded	NO	NPN	M12 (12 mm) connector	Diagram 1	Figure 4
PKW-AP-1H	\$47.00				PNP	M12 (12 mm) connector	Diagram 2	Figure 4
Extended Distance								
PKW-ON-2H	\$28.25	8 mm (0.315 in)	Unshielded	NO/N.C	NPN	M12 (12 mm) connector	Diagram 3	Figure 1
PKW-OP-2H	\$41.50				PNP	M12 (12 mm) connector	Diagram 4	Figure 1
PKW-AN-2H	\$55.00	12 mm (0.472 in)	Unshielded	NO	NPN	M12 (12 mm) connector	Diagram 1	Figure 4
PKW-AP-2H	\$55.00				PNP	M12 (12 mm) connector	Diagram 2	Figure 4
Triple Distance								
PKW-AN-5A	\$87.00	10 mm (0.394 in)	Shielded	NO	NPN	2 m (6.5') axial cable	Diagram 1	Figure 2
PKW-AP-5A	\$87.00				PNP	2 m (6.5') axial cable	Diagram 2	Figure 2
PKW-AN-5H	\$87.00				NPN	M12 (12 mm) connector	Diagram 1	Figure 3
PKW-AP-5H	\$87.00				PNP	M12 (12 mm) connector	Diagram 2	Figure 3

Wiring diagrams

Diagram 1




Diagram 2




Diagram 3





Diagram 4



Connector

M12 connector



Note: Pin 2 is not present on some models.


PKW Series Inductive Proximity Sensors

Specifications	Standard Distance Models	Extended Distance Models	Triple Distance Models	PKW-A*-1H	PKW-A*-2H
Mounting Type	Shielded	Unshielded	Shielded	Shielded	Unshielded
Nominal Sensing Distance	5 mm (0.197 in) ¹	8 mm (0.315 in) ¹	10 mm (0.394 in)	5 mm (0.197 in)	12 mm (0.472 in)
Operating Distance	NA			0 to 4 mm	0 to 9.7 mm (0.38in)
Material Correction Factors	See Material Influence Table 2 later in this section.				
Output Type	NPN or PNP and NO/NC complementary		NPN or PNP, NO only	NPN or PNP, NO only	
Operating Voltage	10 to 30 VDC			10 to 36 VDC	10 to 30 VDC
No-load Supply Current	15 mA		10 mA	20 mA	25 mA
Operating (Load) Current	≤400 mA		≤200 mA	100 mA	
Off-state (Leakage) Current	≤10μA		≤100μA	<0.1 mA	
Voltage Drop	≤0.8 V		≤2.0 V	<2.5 V	
Switching Frequency	1 kHz		200 Hz	100 Hz	500 Hz
Differential Travel (% of Nominal Distance)	2 to 10%		≤15%	≤20%	
Repeat Accuracy	≤5%		NA	NA	
Ripple	≤10%		≤20%	NA	
Time Delay Before Availability (tv)	100 ms		≤10 ms	negligible	
Reverse Polarity Protection	Not available			Yes	
Short-circuit Protection	Not available			Yes (non-latching)	
Operating Temperature	-25° to 70°C (-13° to 158°F)				0° to 100°C (32° to 212°F)
Protection Degree (DIN 40050)	IEC IP67/68		IEC IP67 ² (connector) IP68 ² (cable)	IEC IP67, IP68	IEC IP65/67/68/69K
Indication/Switch Status	Yellow (NO output energized)				
Housing Material	Stainless steel				
Sensing Face Material	Polyphenylene Sulfide (PPS)		Stainless steel	Stainless steel	Stainless steel
Shock Resistance / Vibration Resistance	See terminology section				
Tightening Torque	40 Nm (29 lb-ft)		50 Nm (37 lb-ft)	50 Nm (37 lb-ft)	
Weight	70 g (2.47 oz)		114 g (4.02 oz) /50 g (1.76 oz)	56 g (1.98 oz)	
Connection	M12 connector		2 m (6.5') axial cable or M12 connector	M12 connector. 2 lock nuts included	
Agency Approvals	NA		UL file E328811, RoHS	cULus file E328811, CE, RoHS	

Notes: ¹With 12 x 12mm FE360 target ²Fully submersible to 290 psi.

Dimensions

mm [inches]

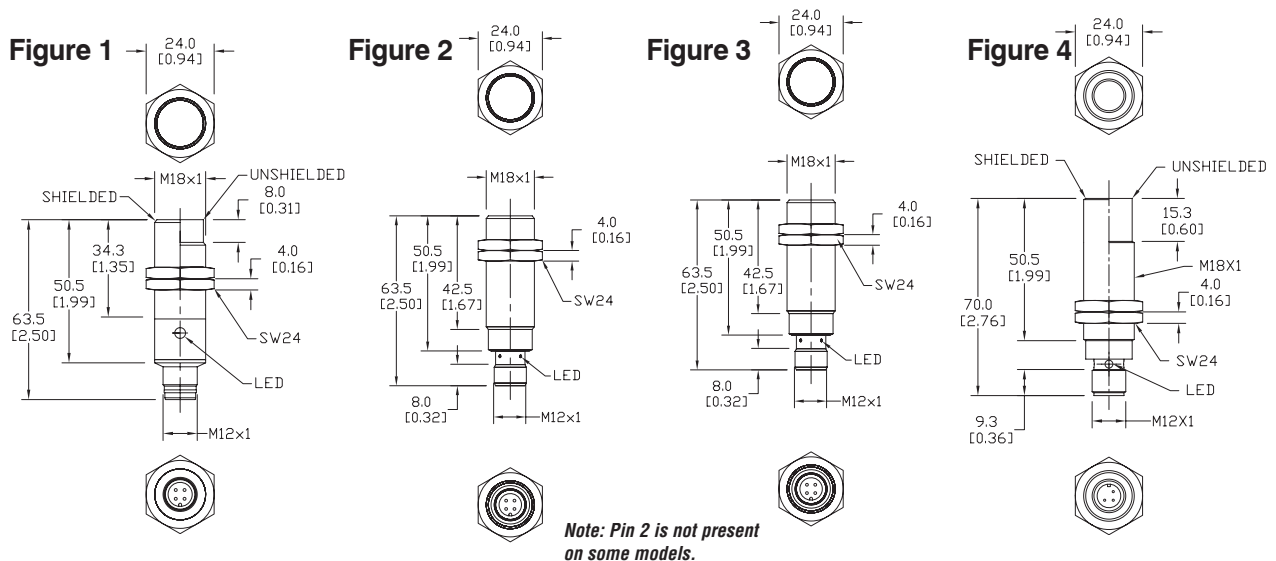

PTW Series Inductive Proximity Sensors



M30 (30 mm) stainless steel - DC

- Eight low cost, high performance models available
- Metal sensing face for extreme environments
- LED status indicators are visible at a wide angle.
- Triple-sensing models sense all metals at the same distance.
- One-piece stainless design
- Axial cable or M12 quick-disconnect models
- Purchase cable separately (for quick-disconnect models).
- Lifetime warranty



PTW Series M30 DC SS Inductive Prox Selection Chart								
Part Number	Price	Sensing Range	Housing	Output State	Logic	Connection	Wiring	Dimensions
Standard Distance								
PTW-AN-1H	\$37.25	10 mm (0.394 in)	Shielded	N.O	NPN	M12 (12 mm) connector	Diagram 1	Figure 1
PTW-AP-1H	\$49.00				PNP	M12 (12 mm) connector	Diagram 2	Figure 1
Extended Distance								
PTW-AN-2H	\$45.50	25 mm (0.984 in)	Unshielded	N.O	NPN	M12 (12 mm) connector	Diagram 1	Figure 1
PTW-AP-2H	\$45.00				PNP	M12 (12 mm) connector	Diagram 2	Figure 1
Triple Distance								
PTW-AN-5A	\$101.00	20 mm (0.787 in)	Shielded	N.O	NPN	2 m (6.5') axial cable	Diagram 1	Figure 2
PTW-AP-5A	\$101.00				PNP	2 m (6.5') axial cable	Diagram 2	Figure 2
PTW-AN-5H	\$101.00				NPN	M12 (12 mm) connector	Diagram 1	Figure 3
PTW-AP-5H	\$101.00				PNP	M12 (12 mm) connector	Diagram 2	Figure 3

Wiring diagrams

Diagram 1

NPN Output






Diagram 2

PNP Output



Connector

M12 connector



Note: Pin 2 is not present on some models.

PTW Series Inductive Proximity Sensors

Specifications	PTW-A*-1H	PTW-A*-2H	PTW-A*-5*
Mounting Type	Shielded	Unshielded	Shielded
Nominal Distance	10 mm (0.394 in)	25 mm (0.984 in)	20 mm (0.787 in)
Operating Distance	0 to 8.1 mm (0.32 in)	0 to 24.3 mm (0.96 in)	NA
Material Correction Factors	See Material Influence Table 2 later in this section.		
Output Type	NPN or PNP, NO only		
Operating Voltage	10 to 36 VDC		10 to 30 VDC
No-load Supply Current	20 mA	25 mA	10 mA
Operating (Load) Current	100 mA		≤200 mA
Off-state (Leakage) Current	<1 mA		≤100 μA
Voltage Drop	<2.5V		≤2.0V
Switching Frequency	50 Hz	250 Hz	100 Hz
Differential Travel (% of Nominal Distance)	≤20%		≤15%
Repeat Accuracy	Not available		≤5%
Ripple	Not available		≤20%
Time Delay Before Availability (tv)	negligible	Not available	≤10 ms
Reverse Polarity Protection	Yes		
Short-circuit Protection	Yes (non-latching)		
Operating Temperature	-25° to 70°C (-13° to 158°F)	0° to 100°C (32° to 212°F)	-25° to 70°C (-13° to 158°F)
Protection Degree (DIN 40050)	IEC IP67, IP68 (coolant)	IEC IP65/67/68/69K	IEC IP67* (connector) IP68* (cable)
Indication/Switch Status	Yellow (4 x 90°)		Yellow (NO output energized)
Housing Material	Stainless steel		Stainless steel
Sensing Face Material	Stainless steel		Stainless steel
Shock Resistance / Vibration Resistance	See terminology section		
Tightening Torque	80 Nm (50 lb-in)		150 Nm (111 lb-in)
Weight	145 g (5.11 oz)		114 g (4.02 oz) / 50 g (1.76 oz)
Connections	M12 connector, 2 lock nuts included		2 m (6.5') axial cable or M12 connector
Agency Approvals	cULus, UL file E328811, CE, RoHS		UL file E328811, CE, RoHS

Note: 1 Fully submersible to 290 psi (20 bar).

Dimensions

mm [inches]

Figure 1

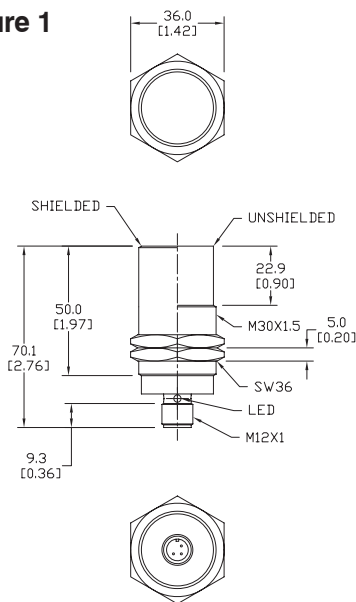


Figure 2



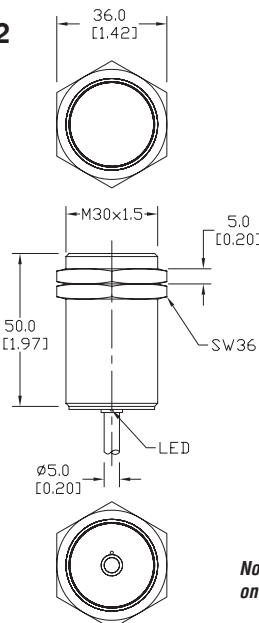


Figure 3

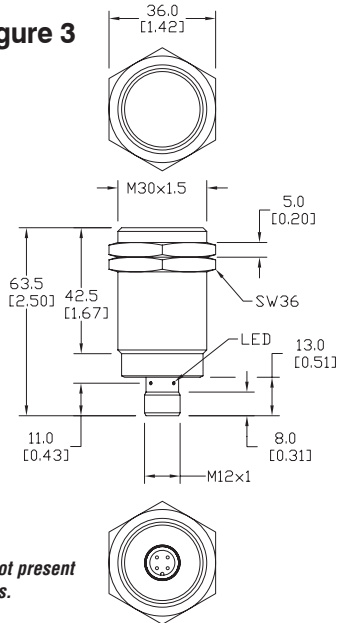

Note: Pin 2 is not present on some models.

V Series AC Inductive Proximity Sensors



M12 (12 mm), M18 (18 mm), M30 (30 mm) metal – AC

- Multi-voltage: 20 to 253 VAC
- 2-wire
- Metal housing
- Axial cable with tang or quick-disconnect models; purchase cable separately
- IP67 rated
- LED status indicator
- Lifetime warranty




V Series M12/18/30 AC Inductive Prox Selection Chart							
Part Number	Price	Sensing Range	Housing	Output State	Connection	Wiring	Dimensions
M12 Models							
VM1-A0-1B	\$35.50	2 mm (0.06 in) ¹	Shielded	NO	2 m (6.5') axial cable	Diagram 1	Figure 1
VM1-A0-2B	\$35.50	4 mm (0.157 in) ¹	Unshielded		2 m (6.5') axial cable	Diagram 1	Figure 1
VM1-A0-1H	\$35.50	2 mm (0.08 in) ¹	Shielded		M12 (12 mm)	Diagram 1	Figure 2
VM1-A0-2H	\$35.50	4 mm (0.157 in) ¹	Unshielded		M12 (12 mm)	Diagram 1	Figure 2
M18 Models							
VK1-A0-1B	\$31.00	5 mm (0.197 in) ²	Shielded	NO	2 m (6.5') axial cable	Diagram 1	Figure 3
VK1-A0-2B	\$31.00	8 mm (0.315 in) ²	Unshielded		2 m (6.5') axial cable	Diagram 1	Figure 3
VK1-A0-1H	\$31.00	5 mm (0.197 in) ²	Shielded		M12 (12 mm)	Diagram 1	Figure 4
VK1-A0-2H	\$31.00	8 mm (0.315 in) ²	Unshielded		M12 (12 mm)	Diagram 1	Figure 4
M30 Models							
VT1-A0-1B	\$37.50	10 mm (0.394 in) ³	Shielded	NO	2 m (6.5') axial cable	Diagram 1	Figure 5
VT1-A0-2B	\$37.50	15 mm (0.591 in) ³	Unshielded		2 m (6.5') axial cable	Diagram 1	Figure 5

¹With 12x12 Fe360 target ²With 18x18 Fe360 target ³With 30x30 Fe360 target

* V Series sensors with 4-pin M12 connectors do not work with Zip Port junction blocks.

Wiring diagram

Diagram 1



Connector

M12 connector



Dimensions

mm [inches]

Figure 1

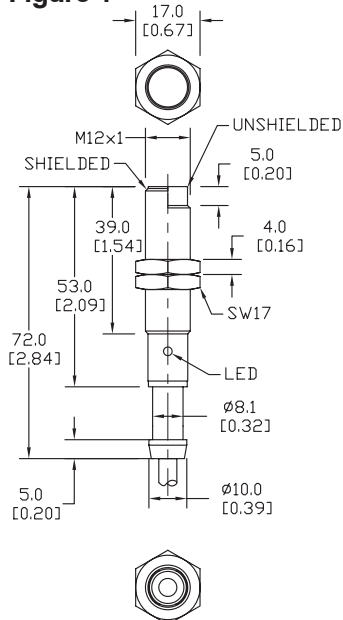


Figure 2


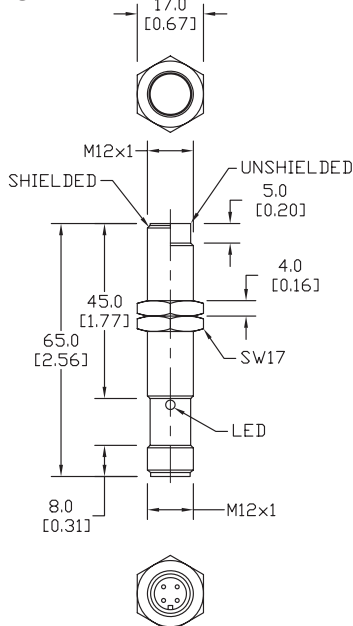


Figure 3

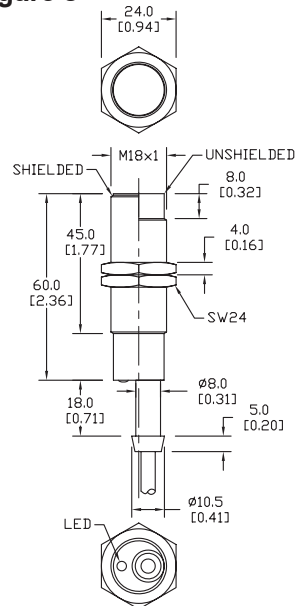

V Series AC Inductive Proximity Sensors

Specifications	M12 Models		M18 Models		M30 Models	
Mounting Type	Shielded	Unshielded	Shielded	Unshielded	Shielded	Unshielded
Nominal Sensing Distance	2	4	5	8	10	15
Operating Distance	NA					
Material Correction Factors	See Material Influence table #1 later in this section.					
Output Type	Triac/NO/2-wire					
Operating Voltage	20 to 253 VAC, 50/60 Hz					
No-load Supply Current	NA					
Operating (Load) Current	5 to 300 mA (RMS)					
Off-state Leakage Current	1.0 mA max. (RMS)					
Voltage Drop						
Switching Frequency	25 Hz					
Differential Travel (% of Nominal Distance)	2 to 10%					
Repeat Accuracy	5%					
Ripple	NA					
Time Delay Before Availability (tv)	200 ms					
Reverse Polarity Protection	NA					
Short Circuit Protection	No					
Operating Temperature	-25° to +70°C (-13° to 158°F)					
Protection Degree (DIN 40 050)	IEC IP67					
LED Indicators	Yellow (output energized)					
Housing Material	Nickel-plated brass					
Sensing Face Material	Polybutylene Terephthalate (PBT)					
Shock/Vibration	See Terminology Section					
Tightening Torque	10 Nm (11 lb-ft)		25 Nm (18.44 lb-ft)		50 Nm (36.88 lb-ft)	
Weight	70 g (2.47 oz)		120 g (4.23 oz)		300 g (10.6 oz)	
Connection	2 m (6.5') axial cable or M12 (12 mm) connector					
Agency Approvals	CE, ULRecognized file E130644					

Use only 2M or 7M cables for AC sensors with M12 connectors.

Dimensions

mm [inches]

Figure 4



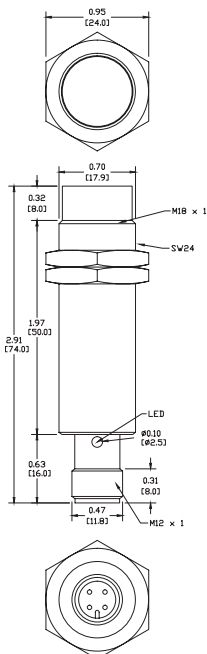


Figure 5

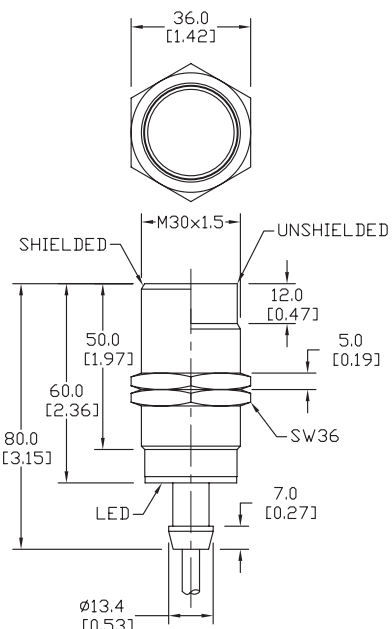

CR5 Series Inductive Proximity Sensors



5 x 5 mm rectangular metal - DC

- Eight models available
- Compact 5 x 5 x 25 mm metal housing
- Axial cable or M8 quick-disconnect models; purchase cable separately
- Complete overload protection
- IP67 rated
- Screws included
- Lifetime warranty



CR5 Series 5x5 Rectangular DC Inductive Prox Selection Chart								
Part Number	Price	Sensing Range	Housing	Output State	Logic	Connection	Wiring	Dimensions
Standard Distance								
CR5-AN-1A	\$36.00	0.8 mm (0.03 in)	Shielded	NO	NPN	2 m (6.5') axial cable	Diagram 1	Figure 1
CR5-AP-1A	\$36.00				PNP	2 m (6.5') axial cable	Diagram 2	Figure 1
CR5-AN-1F	\$41.00				NPN	M8 (8 mm) connector	Diagram 1	Figure 2
CR5-AP-1F	\$41.00				PNP	M8 (8 mm) connector	Diagram 2	Figure 2
Extended Distance								
CR5-AN-2A	\$58.00	1.5 mm (0.06 in)	Shielded	NO	NPN	2 m (6.5') axial cable	Diagram 1	Figure 1
CR5-AP-2A	\$58.00				PNP	2 m (6.5') axial cable	Diagram 2	Figure 1
CR5-AN-2F	\$65.00				NPN	M8 (8 mm) connector	Diagram 1	Figure 2
CR5-AP-2F	\$65.00				PNP	M8 (8 mm) connector	Diagram 2	Figure 2

Dimensions

mm [inches]

Figure 1


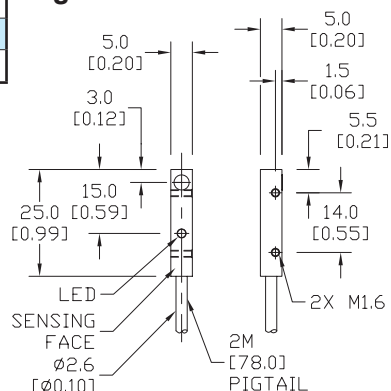


Figure 2

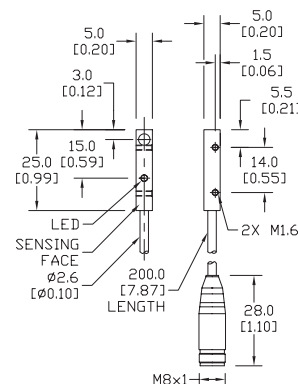

Specifications	Standard Distance Models	Extended Distance Models
Mounting Type	Shielded	Shielded
Nominal Distance	0.8 mm (0.03 in)	1.5 mm (0.06 in)
Operating Distance	NA	
Material Correction Factors	See Material Influence table #1 later in this section	
Output Type	NPN or PNP/NO only/3-wire	
Operating Voltage	10 to 30 VDC	
No-load Supply Current	≤10 mA	
Operating (Load) Current	≤200 mA	
Off-state (Leakage) Current	≤10µA	
Voltage Drop	≤2.0 V	
Switching Frequency	5 kHz	3 kHz
Differential Travel (% of Nominal Distance)	≤10%	
Repeat Accuracy	≤1.5%	
Ripple	≤20%	
Time Delay Before Availability (tv)	10 ms	
Reverse Polarity Protection	Yes	
Short Circuit Protection	Yes (switch auto-resets after overload is removed)	
Operating Temperature	-25° to +70°C (-13° to 158°F)	
Protection Degree (DIN 40050)	IEC IP67	
Indication/Switch Status	Yellow (output energized)	
Housing Material	Nickel-plated brass	
Sensing Face Material	Polyester	
Shock/Vibration	See Terminology Section	
Tightening Torque	1.5 Nm (1.1 lb-in)	
Weight	26 g (0.92 oz)	27 g (0.95 oz)
Connection	2 m (6.5') axial cable or M8 (8 mm) connector	
Agency Approvals	UL file E328811	

Wiring diagrams

Diagram 1

NPN output






Diagram 2

PNP output



Connector

M8 connector



CR8 Series Inductive Proximity Sensors



8 x 8 mm rectangular metal – DC

- 12 models available
- Compact 8 x 8 x 40 mm metal housing
- Axial cable or M8 quick-disconnect models; purchase cable separately
- Complete overload protection
- IP67 rated
- Screws included
- Lifetime warranty



CR8 Series 8x8 Rectangular DC Inductive Prox Selection Chart								
Part Number	Price	Sensing Range	Housing	Output State	Logic	Connection	Wiring	Dimensions
Standard Distance								
CR8-AN-1A	\$25.00	0 to 1.5 mm (0 to 0.06 in)	Shielded	NO	NPN	2 m (6.5') axial cable	Diagram 1	Figure 1
CR8-AP-1A	\$25.00				PNP	2 m (6.5') axial cable	Diagram 2	Figure 1
CR8-AN-1F	\$25.00				NPN	M8 (8 mm) connector	Diagram 1	Figure 2
CR8-AP-1F	\$25.00				PNP	M8 (8 mm) connector	Diagram 2	Figure 2
Extended Distance								
CR8-AN-2A	\$34.50	0 to 2 mm (0 to 0.08 in)	Shielded	NO	NPN	2 m (6.5') axial cable	Diagram 1	Figure 1
CR8-AP-2A	\$34.50				PNP	2 m (6.5') axial cable	Diagram 2	Figure 1
CR8-AN-2F	\$34.50				NPN	M8 (8 mm) connector	Diagram 1	Figure 2
CR8-AP-2F	\$34.50				PNP	M8 (8 mm) connector	Diagram 2	Figure 2
Triple Distance								
CR8-AN-3A	\$77.00	3 mm (0.118 in)	Shielded	NO	NPN	2 m (6.5') axial cable	Diagram 1	Figure 1
CR8-AP-3A	\$77.00				PNP	2 m (6.5') axial cable	Diagram 2	Figure 1
CR8-AN-3F	\$77.00				NPN	M8 (8 mm) connector	Diagram 1	Figure 2
CR8-AP-3F	\$77.00				PNP	M8 (8 mm) connector	Diagram 2	Figure 2

Wiring diagrams

Diagram 1






Diagram 2



Connector

M8 connector





CR8 Series Inductive Proximity Sensors

Specifications	Standard Distance Models	Extended Distance Models	Triple Distance Models
Mounting Type	Shielded	Shielded	Shielded
Nominal Distance	1.5 mm (0.06 in)	2 mm (0.08 in)	3 mm (0.118 in)
Operating Distance	NA	NA	NA
Material Correction Factors	See Material Influence table #1 later in this section		See Material Influence table #2
Output Type	NPN or PNP/NO only/3-wire		
Operating Voltage	10 to 30 VDC		
No-load Supply Current	≤10 mA		
Operating (Load) Current	≤200 mA		
Off-state (Leakage) Current	≤10µA		
Voltage Drop	≤2.0 V		
Switching Frequency	1 kHz		
Differential Travel (% of Nominal Distance)	≤10%		
Repeat Accuracy	≤5%		
Ripple	≤20%		
Time Delay Before Availability (tv)	10 ms	50 ms	
Reverse Polarity Protection	Yes		
Short-Circuit Protection	Yes (switch auto-resets after overload is removed)		
Operating Temperature	-25° to +70°C (-13° to 158°F)		
Protection Degree (DIN 40050)	IEC IP67		
Indication/Switch Status	Yellow (output energized)		
Housing Material	Nickel-plated brass	Chrome-plated brass	
Sensing Face Material	Polybutylene Terephthalate (PBT)		
Shock/Vibration	See Terminology Section		
Tightening Torque	4 Nm (2.95 lb-ft)		
Weight (cable/M8 connector)	43 g (1.52 oz)/15 g (0.53 oz)	54 g (1.90 oz)/21 g (0.74 oz)	
Connection	2 m (6.5') axial cable or M8 (8 mm) connector		
Agency Approvals	UL file E328811, CE		

Dimensions

mm [inches]

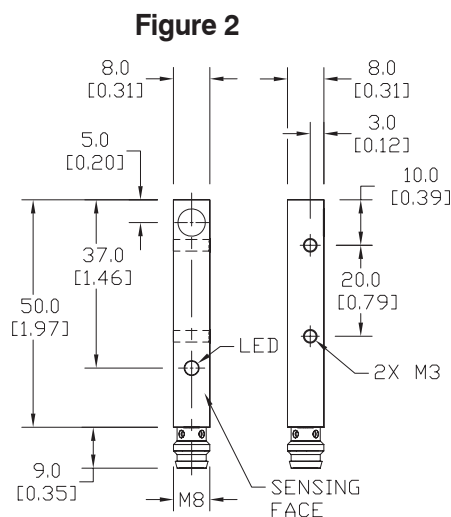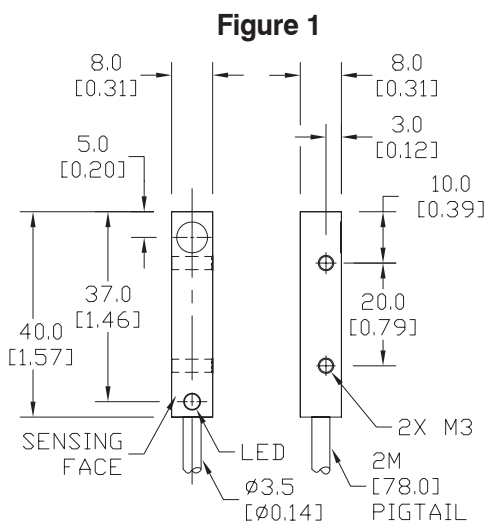

LF40 Series Inductive Proximity Sensors

40 x 40 x 66 mm rectangular plastic - DC



LF40-AP-2H

- Two shielded and two unshielded models available
- Sensing face has five selectable positions.
- IP67 rated
- LED power (green) and status (yellow) indicators are visible at a wide angle.
- Rotatable and locking M12 connector
- Single and complementary outputs available
- Purchase cable separately.
- Lifetime warranty



LF40 Series DC Inductive Prox Selection Chart								
Part Number	Price	Sensing Range	Housing	Output State	Logic	Connection	Wiring	Dimensions
LF40-AP-1H	\$39.00	20 mm (0.79 in)	Shielded	NO	PNP	M12 (12 mm) quick disconnect	Diagram 1	Figure 1
LF40-OP-1H	\$42.00	20 mm (0.79 in)	Shielded	NO/NC Complementary	PNP	M12 (12 mm) quick disconnect	Diagram 2	Figure 1
LF40-AP-2H	\$39.00	35 mm (1.38 in)	Unshielded	NO	PNP	M12 (12 mm) quick disconnect	Diagram 1	Figure 1
LF40-OP-2H	\$42.00	35 mm (1.38 in)	Unshielded	NO/NC Complementary	PNP	M12 (12 mm) quick disconnect	Diagram 2	Figure 1

NOTE: CLASS 2 POWER SUPPLY REQUIRED

Wiring diagrams

Diagram 1





Diagram 2



Connector




LF40 Series Inductive Proximity Sensors

LF40 Series Specifications	LF40-AP-1H	LF40-AP-2H	LF40-OP-1H	LF40-OP-2H
Mounting Type	Shielded	Unshielded	Shielded	Unshielded
Nominal Distance	20 mm ± 10%	35 mm ± 10%	20 mm ± 10%	35 mm ± 10%
Operating Distance	0 to 16.2 mm (0 to 0.64 in)	0 to 28.3 mm (0 to 1.11 in)	0 to 16.2 mm (0 to 0.64 in)	0 to 28.3 mm (0 to 1.11 in)
Material Correction Factors	See Material Influence table #2 later in this section.			
Output Type	PNP, NO only		PNP, NO NC Complementary	
Operating Voltage	10 to 36 VDC			
No-load Supply Current	< 20 mA			
Operating (Load) Current	200 mA			
Off-state (Leakage) Current	<0.1 mA			
Voltage Drop	<2.5 V			
Switching Frequency	100 Hz	80 Hz	100 Hz	80 Hz
Differential Travel (% of Nominal Distance)	1 to 20 % of Sr			
Repeat Accuracy	NA			
Ripple	NA			
Time Delay Before Availability (tv)	NA			
Reverse Polarity Protection	Yes			
Short-Circuit Protection	Yes (non-latching)			
Operating Temperature	-25° to 70°C (-13° to 158°F)			
Protection Degree (DIN 40050)	IEC IP67			
Indication/Switch Status	Power: Green Switching status: Yellow			
Housing Material	PPE: diecast zinc nickel-plated			
Sensing Face Material	Polyamide (PA)			
Shock Resistance / Vibration	See terminology section			
Tightening Torque	NA			
Weight	146 g (5.15 oz)	151 g (5.33 oz)	147 g (5.19 oz)	153 g (5.4 oz)
Connection	M12 quick disconnect			
Agency Approvals	cULus file E328811, CE, RoHS			

Dimensions

mm [inches]

Figure 1

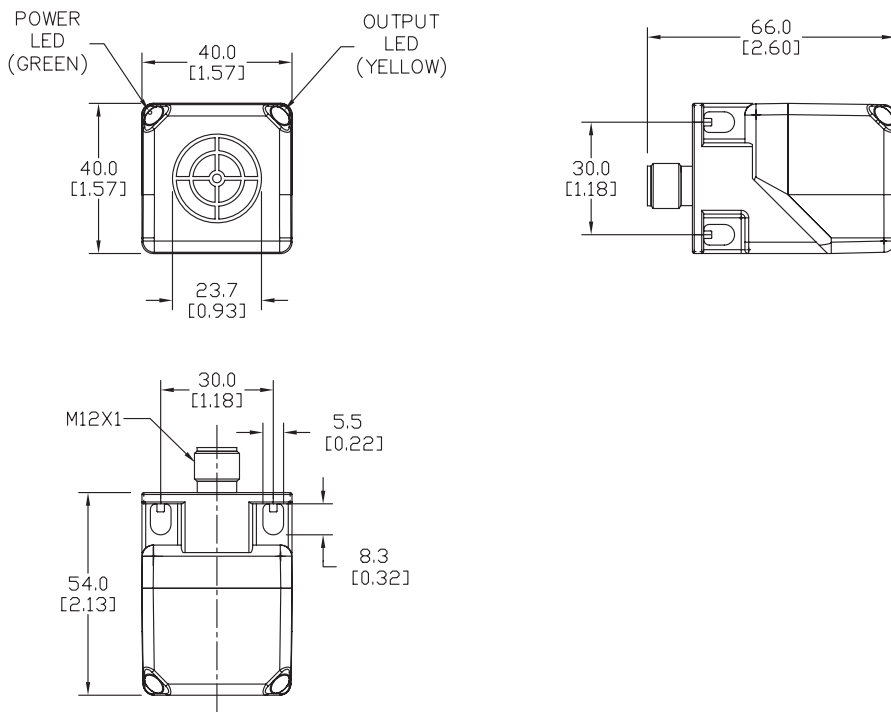

DR10 Series Inductive Proximity Sensors

10 x 16 mm plastic – DC



- Eight models available
- Compact plastic housing
- Axial cable or M8 quick-disconnect models
- Complete overload protection
- IP67 rated
- Purchase cable separately
- Lifetime warranty



DR10 Series Rectangular DC Inductive Prox Selection Chart								
Part Number	Price	Sensing Range	Housing	Output State	Logic	Connection	Wiring	Dimensions
DR10-AN-1A	\$26.00	3mm (0.118in)	Shielded	NO	NPN	2m (6.5') axial cable	Diagram 1	Figure 1
DR10-AP-1A	\$26.00				PNP	2m (6.5') axial cable	Diagram 2	Figure 1
DR10-AN-1F	\$26.00				NPN	M8 (8mm) connector	Diagram 1	Figure 2
DR10-AP-1F	\$26.00				PNP	M8 (8mm) connector	Diagram 2	Figure 2
DR10-AN-2A	\$26.00	6mm (0.236in)	Unshielded	N.O	NPN	2m (6.5') axial cabl	Diagram 1	Figure 1
DR10-AP-2A	\$26.00				PNP	2m (6.5') axial cable	Diagram 2	Figure 1
DR10-AN-2F	\$26.00				NPN	M8 (8mm) connector	Diagram 1	Figure 2
DR10-AP-2F	\$26.00				PNP	M8 (8mm) connector	Diagram 2	Figure 2

Dimensions

mm [inches]

Figure 1


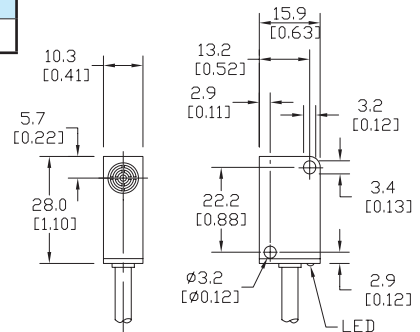


Figure 2

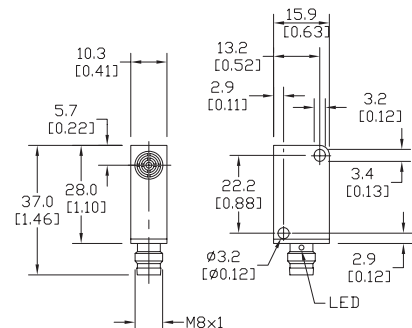

Specifications		
Mounting Type	Shielded	Unshielded
Nominal Distance	3mm (0.118in)	6mm (0.236in)
Operating Distance	NA	
Material Correction Factors	See Material Influence table #1	
Output Type	NPN or PNP/NO only/3-wire	
Operating Voltage	10-30VDC	
No-load Supply Current	≤10mA	
Operating (Load) Current	≤300mA	
Off-state (Leakage) Current	≤10µA	
Voltage Drop	≤1.5 V	
Switching Frequency	3kHz	
Differential Travel	≤1-10%	
Repeat Accuracy	≤1%	
Ripple	≤10%	
Time Delay Before Availability (tv)	2ms	
Reverse Polarity Protection	Yes	
Short-Circuit Protection	Yes (switch auto-resets after overload is removed)	
Operating Temperature	-25° to +75° C (-13° to 167° F)	
Protection Degree (DIN 40050)	IEC IP67	
Indication/Switch Status	Yellow (output energized)	
Housing Material	Plastic	
Sensing Face Material	Plastic	
Shock/Vibration	See Terminology Section	
Tightening Torque	NA	
Weight	113g (3.99oz)/6g (0.21oz)	
Connection	2m (6.5') axial cable or M8 (8mm) connector	
Agency Approvals	CE	

Wiring diagrams

Diagram 1





Diagram 2



Connector



APS Inductive Proximity Sensors



**Top Sensing
APS4-12S-E-D**



**Front Sensing
APS4-12M-E-D**

Compact 12 x 27 / 8 x 26.5 mm plastic – DC

- 10 models available
- Compact polycarbonate housing; comes with mounting plate
- High-frequency oscillation type
- Top or front sensing models
- DC 2-wire or 3-wire
- NPN, PNP, or NPN/PNP
- NO or NC
- Axial cable
- LED indicator
- IP67 rated
- Lifetime warranty



**Top Sensing
APS25-8S-E-D**



**Front Sensing
APS25-8M-E-D**

Compact Rectangular DC Prox Selection Chart

Part Number	Price	Sensing Range	Housing	Output State	Logic	Connection	Wiring	Dimensions
Top-Sensing								
APS25-8S-E-D	\$17.50	2.5mm (0.098 in)	Unshielded	NO	NPN	2m (6.5ft) axial cable	Diagram 1	Figure 1
APS4-12S-E-D	\$17.50	4mm (0.157in)		NO				PNP
APS4-12S-E1-D	\$17.50			NC				
APS4-12S-E2-D	\$17.50			NO				
APS4-12S-Z-D	\$17.50			NO	NPN/ PNP		Diagram 3	
Front-Sensing								
APS25-8M-E-D	\$17.50	2.5mm (0.098 in)	Unshielded	NO	NPN	2m (6.5ft) axial cable	Diagram 1	Figure 2
APS4-12M-E-D	\$17.50	4mm (0.157in)		NO				PNP
APS4-12M-E1-D	\$17.50			NC				
APS4-12M-E2-D	\$17.50			NO				
APS4-12M-Z-D	\$17.50			NO	NPN/ PNP		Diagram 3	

Wiring diagrams

Diagram 1




Diagram 2





Diagram 3



APS Inductive Proximity Sensors

Specifications		
	APS25	APS4
Mounting Type	Unshielded	
Nominal Distance	2.5 mm [0.09 in]	4mm [0.157 in]
Operating Distance	NA	
Material Correction Factor	See Material Influence table #1 later in this section	
Output Type	See sensor selection chart	
Operating Voltage	10-30 VDC	
No-load Supply Current	≤20 mA	≤20 mA (NA for Z)
Operating (Load) Current	≤50mA	
Off-state (Leakage) Current	≤0.1 mA (≤1.0 mA for Z units)	
Voltage Drop	≤1.0 VDC (< 3V for Z models)	
Switching Frequency	500Hz	200Hz
Differential Travel	<20%	
Repeat Accuracy	NA	
Ripple	NA	
Time Delay Before Availability (tv)	5ms	
Reverse Polarity Protection	NA	
Short Circuit Protection	NA	
Operating Temperature	-10° to +50° C (14° to 122° F)	
Protection Degree (DIN 40 050)	IEC IP67	
Indication/Switch Status	Embedded red LED (illuminated when output is active)	
Housing, Sensing Face Material	Polycarbonate	
Shock/Vibration	See Terminology Section	
Tightening Torque	<0.4 Nm	
Weight (cable/M8 connector)	0.0816 lb	
Connection	2m (6.5 ft) axial cable	
Agency Approvals	CE, cURus (UR E198343)	

Dimensions

mm [inches]

Figure 1




Figure 2




Figure 3







Figure 4




Mounting Plate

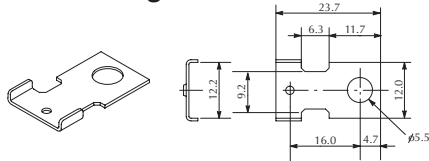

Supplied with APS4x sensors




Supplied with APS25x sensors

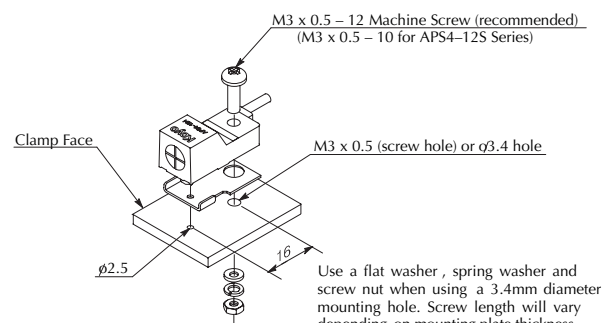

CM Series Capacitive Proximity Sensors

M12 (12 mm) metal – DC

- Sensitivity adjustment via potentiometer
- IP65 rated
- LED status indicators
- M12 quick-disconnect; purchase cable separately
- Lifetime warranty




CM Series Capacitive Prox Selection Chart								
Part Number	Price	Sensing Distance	Housing	Output State	Logic	Connection	Wiring	Dimensions
CM1-AP-1H	\$75.00	6 mm (0.236 in)	Shielded	NO	PNP	M12 (12 mm) quick disconnect	Diagram 1	Figure 1
CM1-AP-2H	\$75.00	12 mm (0.472 in)	Unshielded	NO	PNP	M12 (12 mm) quick disconnect	Diagram 1	Figure 1

CM Series Specifications	CM1-AP-1H	CM1-AP-2H
Mounting Type	Shielded	Unshielded
Nominal Sensing Distance	6 mm (0.236 in)	12 mm (0.472 in)
Operating Distance	NA	
Material Correction Factors	NA	
Output Type	PNP; NO only	
Operating Voltage	10 to 36 VDC	
No-load Supply Current	<12 mA	
Operating (Load) Current	100 mA	
Off-state (Leakage) Current	NA	
Voltage Drop	<2.5V	
Switching Frequency	50Hz	
Differential Travel (% of Nominal Distance)	NA	
Repeat Accuracy	NA	
Ripple	NA	
Time Delay Before Availability (tv)	NA	
Reverse Polarity Protection	Yes	
Short-circuit Protection	Yes, pulsed	
Operating Temperature	-25° to 70°C (-13° to 158°F)	
Protection Degree (DIN 40050)	IEC IP65	
Indication/Switch Status	Yellow (output energized)	
Housing Material	Stainless steel	
Sensing Face Material	Polyether Ether Ketone (PEEK)	
Shock/Vibration	See terminology section	
Tightening Torque	5.0 Nm	
Weight	54g (1.90 oz)	
Connectors	M12 connector. 2 lock nuts included	
Agency Approvals	cULus file E328811, CE, RoHS	

Wiring diagrams

Diagram 1




Connectors



Dimensions mm [inches]

Figure 1

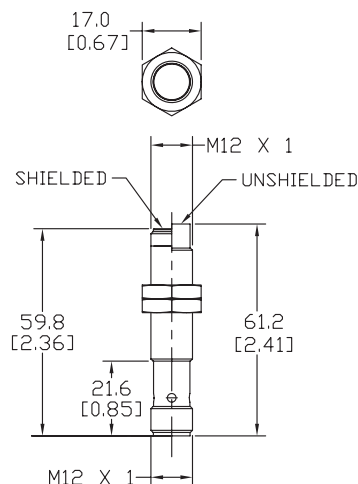

CK Series Capacitive Proximity Sensors

M18 (18 mm) plastic – DC



- NO/NC selectable
- IP65/IP67 rated
- LED status indicators
- M12 quick-disconnect; purchase cable separately
- Lifetime warranty
- Auto-detect circuit
- Push button teach
- Mounting accessories available




CK Series Capacitive Prox Selection Chart								
Part Number	Price	Sensing Distance	Housing	Output State	Logic	Connection	Wiring	Dimensions
CK1-00-2H	\$79.00	12 mm (0.472 in)	Unshielded	NO/NC	NPN/PNP	M12 (12 mm) quick disconnect	Diagram 1	Figure 1

CK Series Specifications	CK1-00-2H
Mounting Type	Unshielded
Nominal Sensing Distance	12 mm (0.472 in)
Operating Distance	NA
Material Correction Factors	
Output Type	NPN/PNP; NO/NC
Operating Voltage	10 to 36 VDC
No-load Supply Current	<20 mA
Operating (Load) Current	200 mA
Off-state (Leakage) Current	NA
Voltage Drop	<2.5V
Switching Frequency	10Hz
Differential Travel (% of Nominal Distance)	
Repeat Accuracy	NA
Ripple	
Time Delay Before Availability (tv)	
Reverse Polarity Protection	Yes
Short-circuit Protection	Yes, pulsed
Operating Temperature	-25° to 80°C (-13° to 176°F) Sensing face: -25° to 110°C (-13° to 230°F)
Protection Degree (DIN 40050)	IEC IP65/IP67
Indication/Switch Status	Yellow (output energized)
Housing Material	Polybutylene Terephthalate (PBT)
Sensing Face Material	
Shock/Vibration	See terminology section
Tightening Torque	2.0 Nm
Weight	59g (2.08 oz)
Connectors	M12 connector. 2 lock nuts included
Agency Approvals	cULus file E328811, CE, RoHS

Wiring diagrams


Diagram 1

NPN Output




Connectors

M12 connector




PNP Output



Dimensions mm [inches]

Figure 1

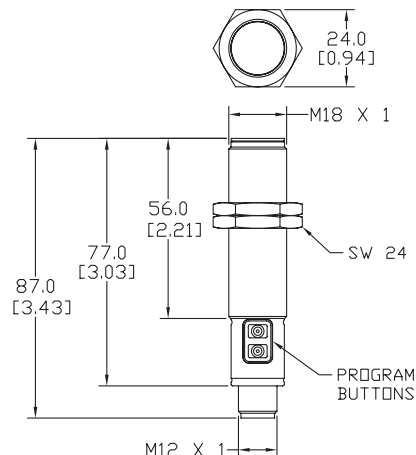

CT Series Capacitive Proximity Sensors



M30 (30 mm) metal, plastic – DC, AC/DC

Plastic Housings:

- Auto-detect circuit (CT1-00-2H only)
- Push button teach
- NO/NC selectable
- IP65/IP67 rated
- LED status indicators
- M12 or 1/2 inch Micro AC quick-disconnect; purchase cable separately
- Lifetime warranty
- Mounting accessories available

Metal Housings:

- NO or NC options
- IP65 rated
- 2m axial cable
- LED status indicators
- Lifetime warranty
- Mounting accessories available



CT Series Capacitive Prox Selection Chart								
Part Number	Price	Sensing Distance	Housing	Output State	Logic	Connection	Wiring	Dimensions
Plastic Housing								
CTV-00-2M	\$88.00	40 mm (1.575 in)	Unshielded	NO/NC	-	1/2 inch micro AC quick disconnect	Diagram 1	Figure 1
CT1-00-2H	\$69.00				NPN/PNP	M12 (12 mm) quick disconnect	Diagram 2	Figure 2
Metal Housing								
CT1-AN-1A	\$72.00	15 mm (0.59 in)	Shielded	NO	NPN	2m (6.5') axial cable	Diagram 3	Figure 3
CT1-AP-1A	\$72.00	20 mm (0.70 in)	Unshielded		PNP			
CT1-AN-2A	\$72.00			NC	NPN		Diagram 3	
CT1-AP-2A	\$72.00	PNP	Diagram 4					
CT1-CN-2A	\$72.00	20 mm (0.70 in)	Unshielded	NC	NPN	Diagram 3		
CT1-CP-2A	\$72.00				PNP	Diagram 4		

Wiring diagrams

Diagram 1

AC Output




Diagram 2

NPN Output




Diagram 3

NPN Output






Diagram 4

PNP Output



Connectors


M12 connector



1/2" micro AC




PNP Output



CT Series Capacitive Proximity Sensors

CT Series Specifications	CT1-AN-1A	CT1-AP-1A	CT1-AN-2A	CT1-AP-2A	CT1-CN-2A	CT1-CP-2A	CT1-00-2H	CTV-00-2M
Mounting Type	Shielded		Unshielded					
Nominal Sensing Distance	15 mm (0.59 in)		20 mm (0.70 in)				40 mm (1.575 in)	
Operating Distance	NA							
Material Correction Factors								
Output Type	NPN/PNP; NO/NC						AC/DC; NO/NC	
Operating Voltage	10 to 30 VDC				10 to 36 VDC		20 to 250 VDC/ 30 to 250 VAC	
No-load Supply Current	8 mA				<20 mA		NA	
Operating (Load) Current	≤200 mA				200 mA		150 mA (40°C)/ 100 mA (80°C) continuous or 1.0 A (20 ms/ 0.5 Hz) peak	
Off-state (Leakage) Current	≤10 µA				NA		<2.5 mA (250 VAC)/ <1.7 mA (110 VAC)/ <1.5 mA (24 VDC)	
Voltage Drop	1.8 volts maximum				<2.5 VDC		<8 VDC/ <10 VAC	
Switching Frequency	100Hz				10Hz			
Differential Travel (% of Nominal Distance)	2 to 20%				NA			
Repeat Accuracy	10%							
Ripple	≤10%							
Time Delay Before Availability (tv)	100 ms							
Reverse Polarity Protection	Yes							
Short-circuit Protection	Yes (switch auto-resets after overload is removed)						Yes, pulsed	No
Operating Temperature	-25° to +70°C (-13° to 158°F)				-25° to 80°C (-13° to 176°F) Sensing face: -25° to 110°C (-13° to 230°F)			
Protection Degree (DIN 40050)	IEC IP65				IEC IP65/IP67			
Indication/Switch Status	Green (supply, Red (NO output energized)				Yellow (output energized)			
Housing Material	Nickel-plated brass				Polybutylene Terephthalate (PBT)			
Sensing Face Material	Polybutylene Terephthalate (PBT)							
Shock/Vibration	See Terminology Section							
Tightening Torque	50 Nm (37 lb-ft)				8.0 Nm			
Weight	280g (19.88oz)				117g (4.13 oz)		122g (4.30 oz)	
Connectors	2m (6.5') axial cable 2 lock nuts included				M12 connector 2 lock nuts included		1/2 inch micro AC connector 2 lock nuts included	
Agency Approvals	CE						cULus file E328811, CE, RoHS	

Dimensions mm [inches]

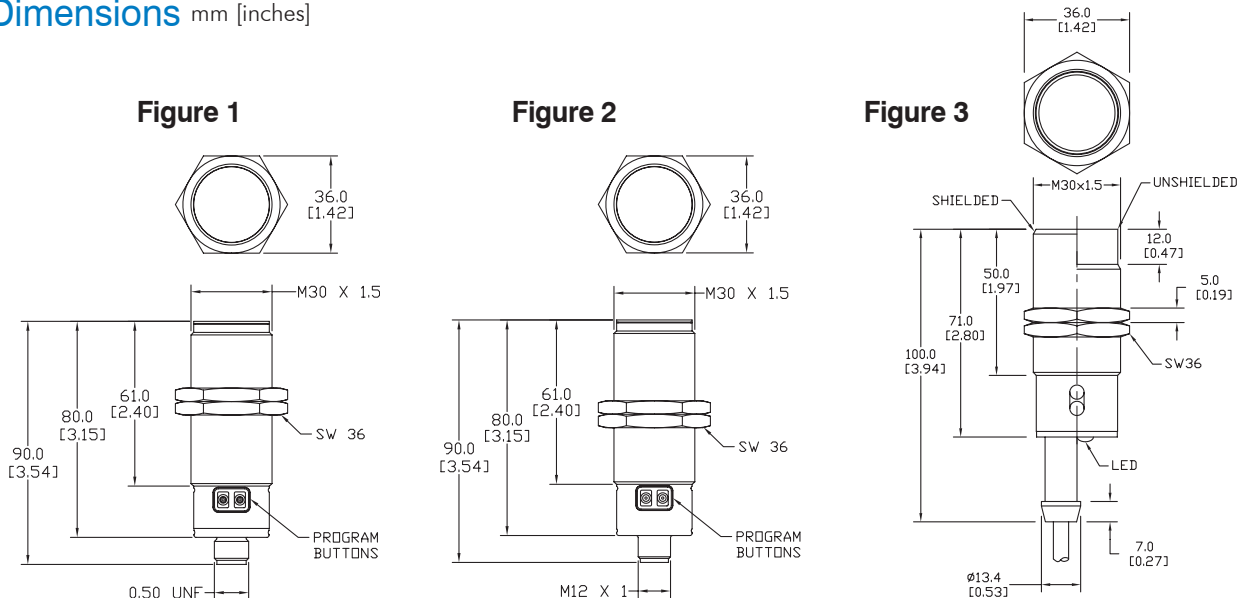

CR Series Capacitive Proximity Sensors

Rectangular plastic - DC



- Low profile housing ideal for sight glass applications
- NO/NC selectable
- IP65/IP67 rated
- LED status indicators
- Lifetime warranty
- Auto-detect circuit
- Push button teach
- Mounting accessories available


CR Series Capacitive Prox Selection Chart								
Part Number	Price	Sensing Distance	Housing	Output State	Logic	Connection	Wiring	Dimensions
CR1-00-2A	\$59.00	12 mm (0.472 in)	Unshielded	NO/NC	NPN/PNP	2 m (6.5 ft.) axial cable	Diagram 1	Figure 1

CR Series Specifications	CR1-00-2A
Mounting Type	Unshielded
Nominal Sensing Distance	12 mm (0.472 in)
Operating Distance	NA
Material Correction Factors	NA
Output Type	NPN/PNP; NO/NC
Operating Voltage	10 to 36 VDC
No-load Supply Current	<17 mA
Operating (Load) Current	100 mA
Off-state (Leakage) Current	NA
Voltage Drop	<2.5V
Switching Frequency	10Hz
Differential Travel (% of Nominal Distance)	NA
Repeat Accuracy	NA
Ripple	NA
Time Delay Before Availability (tv)	NA
Reverse Polarity Protection	Yes
Short-circuit Protection	Yes, pulsed
Operating Temperature	-25° to 80°C (-13° to 176°F)
Protection Degree (DIN 40050)	IEC IP65/IP67
Indication/Switch Status	Yellow (output energized)
Housing Material	Polybutylene Terephthalate (PBT)
Sensing Face Material	Polybutylene Terephthalate (PBT)
Shock/Vibration	See terminology section
Tightening Torque	NA
Weight	92g (3.25 oz)
Connectors	2 meter axial cable
Agency Approvals	cULus file E328811, CE, RoHS


Wiring diagrams

Diagram 1

NPN Output




PNP Output



Dimensions mm [inches]

Figure 1

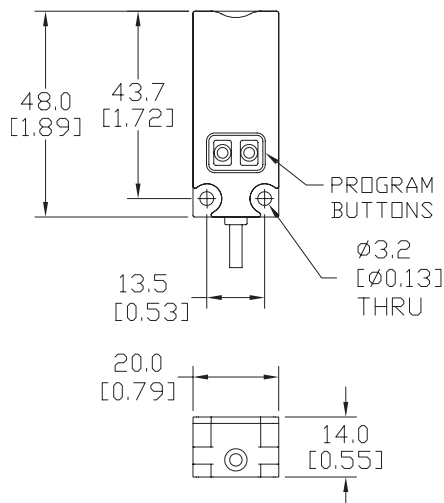

Capacitive Proximity Sensors - Accessories



Mounting Well

Mounting Adapter

Capacitive Proximity Sensors Accessory Chart				
Part Number	Price	Description	Material	Dimensions
Mounting Adapter				
CR1-ADPTR	\$4.00	Adapter for CR1 series capacitive sensors	Housing: Polybutylene Terephthalate (PBT) Included Screws: M3 x 6 Steel (0.5 Nm)	Figure 1
Mounting Wells				
MWT-01	\$43.00	30 mm sensor mounting well	PTFE - Polytetrafluoroethylene (Teflon®) Temp: -25° to 246°C (-13° to 474.8°F) Max. pressure: 100 PSI (6.9 bar)	Figure 2
MWK-01	\$35.00	18 mm sensor mounting well		Figure 3

Dimensions mm[inches]

Figure 1

CR1 Adapter

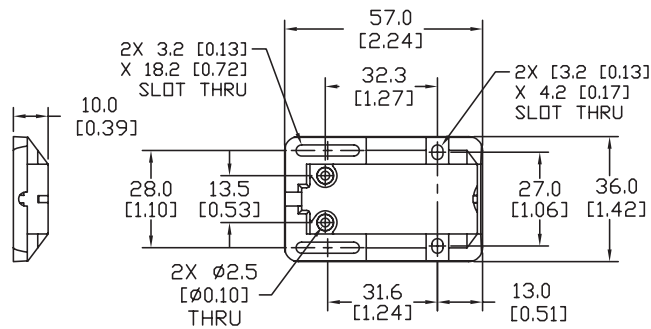


Figure 2

30mm Sensor Mounting Well


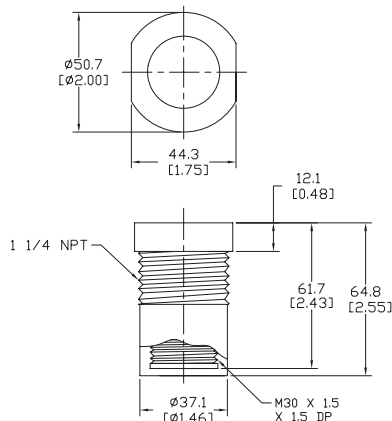


Figure 3

18mm Sensor Mounting Well



AE Series Analog Inductive Proximity Sensors

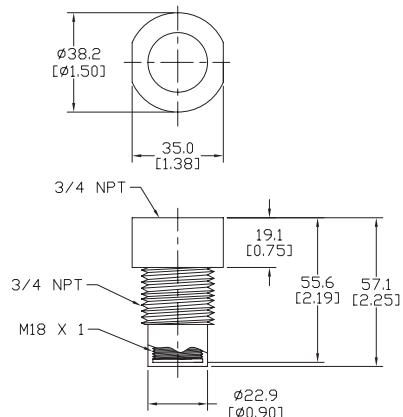

M8 (8 mm) metal – analog output

- 4 models available
- Compact metal housing
- Axial cable or M8 quick-disconnect models
- IP67 rated
- Purchase cables separately (for quick-disconnect model)
- Lifetime warranty



AE Series M8 Analog Inductive Prox Selection Chart

Part Number	Price	Sensing Range	Housing	Output	Connection	Wiring	Dimensions
AE9-10-1A	\$186.00	0 to 4 mm (0-0.157 in)	Shielded	0-10VDC	2m (6.5') axial cable	Diagram 1	Figure 1
AE9-10-1F	\$186.00				M8 (8 mm) connector	Diagram 1	Figure 2

Specifications

	AE9-10-1*
Mounting Type	Shielded
Nominal Distance	0 to 4 mm (0-0.157 in)
Operating Distance	NA
Material Correction Factors	See Material Influence Table 2 later in this section.
Output Type	0-10 VDC
Operating Voltage	15-30 VDC
No-load Supply Current	≤10 mA
Operating (Load) Current	1 kΩ
Off-state (Leakage) Current	NA
Voltage Drop	≤2.0 V
Switching Frequency	NA
Differential Travel (% of Nominal Distance)	NA
Repeat Accuracy	±0.01 mm
Ripple	≤20%
Response Time	0.6 mc
Time Delay Before Availability (tv)	≤50 ms
Reverse Polarity Protection	Yes
Short-Circuit Protection	Yes (switch auto-resets after overload is removed)
Operating Temperature	-25° to +70° C (-13° to 158° F)
Protection Degree (DIN 40050)	IEC IP67
Indication/Switch Status	NA
Housing Material	Chrome-plated brass
Sensing Face Material	Polybutylene Terephthalate (PBT)
Shock/Vibration	See Terminology Section
Tightening Torque	4 Nm (2.95 lb.-ft.)
Weight (cable/M8 connector)	50 g (1.76 oz.) / 20 g (0.71 oz.)
Connection	2 m (6.5') axial cable or M8 (8 mm) connector
Agency Approvals	UL file E328811

Dimensions

mm [inches]

Figure 1



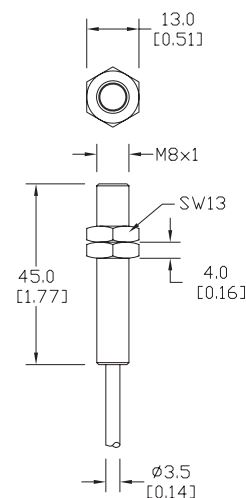


Figure 2

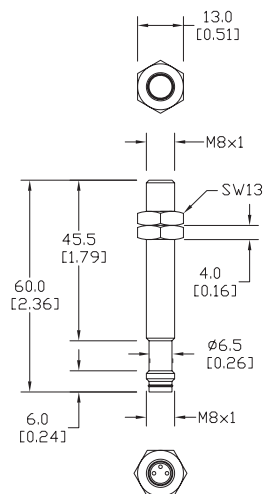

Wiring diagram


Diagram 1



Connector



AM Series Analog Inductive Proximity Sensors



M12 (12 mm) metal – analog output

- Voltage or current analog output
- 4 models available
- Metal housing
- Axial cable or M12 quick-disconnect models
- IP67 rated
- Purchase cable separately (for quick-disconnect model)
- Lifetime warranty



AM Series M12 Analog Inductive Prox Selection Chart

Part Number	Price	Sensing Range	Housing	Output	Connection	Dimensions
AM9-05-1A	\$114.00	0 to 6 mm (0-0.24 in)	Shielded	0 - 5 VDC or 1-5 mA	2 m (6.5) axial cable	Figure 1
AM9-05-1H	\$114.00				M12 (12 mm) connector	Figure 2
AM9-10-1A	\$127.00	0 to 6 mm (0-0.24 in)		0-10 VDC or 4-20 mA	2 m (6.5) axial cable	Figure 1
AM9-10-1H	\$127.00				M12 (12 mm) connector	Figure 2

Specifications

Mounting Type	AM9-05-1*	AM9-10-1*
		Shielded
Nominal Sensing Distance	0 to 6 mm (0-0.24 in)	0 to 6 mm (0-0.24 in)
Operating Distance	NA	
Material Correction Factors	See Material Influence Table 2 later in this section.	
Output Type	0-5 VDC or 1-5 mA	0-10 VDC or 4-20 mA
Current Output Max. Load / Power Supply	1 kΩ / 10 VDC; 5 kΩ / 30 VDC	0.5 kΩ / 15 VDC; 1 kΩ / 30 VDC
Voltage Output Min. Load	500 Ω	1 kΩ
Operating Voltage	10 -30 VDC	15 -30 VDC
No-load Supply Current	≤10 mA	≤12 mA
Operating (Load) Current	1 kΩ	0.5 kΩ
Off-state (Leakage) Current	NA	
Voltage Drop	≤2.0 V	
Switching Frequency	NA	
Differential Travel (# of Nominal Distance)	NA	
Repeat Accuracy	±0.01 mm	
Ripple	≤20%	
Response Time	1 ms	
Time Delay Before Availability (tv)	≤50 ms	
Reverse Polarity Protection	Yes	
Short-Circuit Protection	Yes (switch auto-resets after overload is removed)	
Operating Temperature	-25° to +70° C (-13° to 158° F)	
Protection Degree (DIN 40050)	IEC IP67	
Indication/Switch Status	NA	
Housing Material	Chrome-plated brass	
Sensing Face Material	Polybutylene Terephthalate (PBT)	
Shock / Vibration	See Terminology Section	
Tightening Torque	10 Nm (7.37 lb-ft)	
Weight (cable/M8 connector)	95 g (3.35 oz.) / 33 g (1.16 oz.)	
Connection	2 m (6.5) axial cable or M12 (12 mm) connector	
Agency Approvals	UL file E328811	

Dimensions

mm [inches]

Figure 1



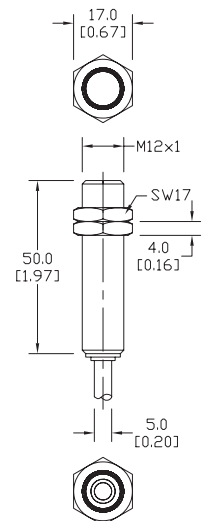


Figure 2

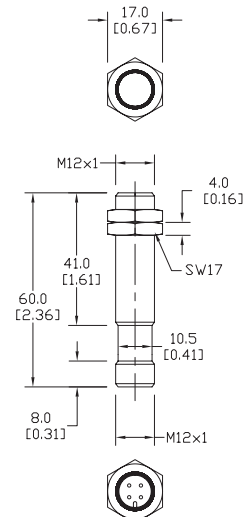

Wiring diagram



Connector

M12 connector



Sensors with M12 connectors must use 2M or 7M cables (4-wire).

AK Series Analog Inductive Proximity Sensors



M18 (18 mm) metal – analog output

- Voltage or current analog output
- 4 models available
- Metal housing
- Axial cable or M12 quick-disconnect models
- IP67 rated
- Purchase cable separately (for quick-disconnect model)
- Lifetime warranty



AK Series M18 Analog Inductive Prox Selection Chart

Part Number	Price	Sensing Range	Housing	Output	Connection	Dimensions
AK9-05-1A	\$119.00	0 to 10 mm (0-0.39 in)	Shielded	0 - 5 VDC or 1-5 mA	2 m (6.5') axial cable	Figure 1
AK9-05-1H	\$119.00				M12 (12 mm) connector	Figure 2
AK9-10-1A	\$119.00	0 to 10 mm (0-0.39 in)	Shielded	0-10 VDC or 4-20 mA	2 m (6.5') axial cable	Figure 1
AK9-10-1H	\$132.00				M12 (12 mm) connector	Figure 2

Dimensions

mm [inches]

Figure 1


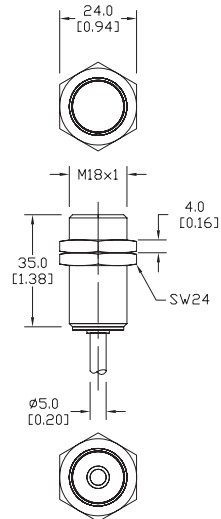



Figure 2

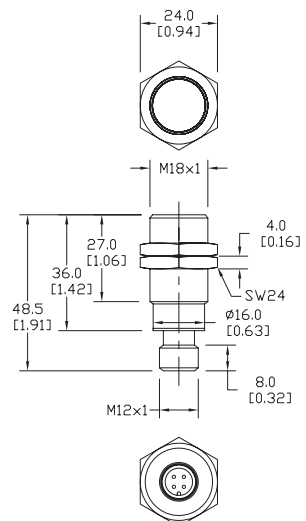

Specifications

Mounting Type	AK9-05-1*	AK9-10-1*
Nominal Sensing Distance	0 to 10 mm (0-0.39 in)	0 to 10 mm (0-0.39 in)
Operating Distance	NA	
Material Correction Factors	See Material Influence Table 2 later in this section.	
Output Type	0-5 VDC or 1-5 mA	0-10 VDC or 4-20 mA
Current Output Max. Load / Power Supply	1 kΩ / 10 VDC; 5 kΩ / 30 VDC	0.5 kΩ / 15 VDC; 1 kΩ / 30 VDC
Voltage Output Min. Load	500 Ω	1 kΩ
Operating Voltage	10 -30 VDC	15 -30 VDC
No-load Supply Current	≤10 mA	≤12 mA
Operating (Load) Current	NA	
Off-state (Leakage) Current	NA	
Voltage Drop	≤2.0 V	
Switching Frequency	NA	
Differential Travel (% of Nominal Distance)	NA	
Repeat Accuracy	±0.02 mm	
Ripple	≤20%	
Response Time	2 ms	
Time Delay Before Availability (tv)	≤50 ms	
Input Voltage Transient Protection	Up to 30 VDC	
Reverse Polarity Protection	Yes	
Short-Circuit Protection	Yes (switch auto-resets after overload is removed)	
Operating Temperature	-25° to +70° C (-13° to 158° F)	
Protection Degree (DIN 40050)	IEC IP67	
Indication/Switch Status	NA	
Housing Material	Chrome-plated brass	
Sensing Face Material	Polybutylene Terephthalate (PBT)	
Shock/Vibration	See Terminology Section	
Tightening Torque	30 Nm (22 lb-ft)	
Weight (cable/M8 connector)	110 g (3.88 oz.) / 50 g (1.76 oz.)	
Connection	2 m (6.5') axial cable or M12 (12 mm) connector	
Agency Approvals	UL file E328811	

Wiring diagram



Connector

M12 connector



Sensors with M12 connectors must use 2M or 7M cables (4-wire).

AT Series Analog Inductive Proximity Sensors



M30 (30 mm) metal – analog output

- Voltage or current analog output
- 4 models available
- Metal housing
- Axial cable or M12 quick-disconnect models
- IP67 rated
- Purchase cable separately (for quick-disconnect model)
- Lifetime warranty



AT Series M30 Analog Inductive Prox Selection Chart						
Part Number	Price	Sensing Range	Housing	Output	Connection	Dimensions
AT9-05-1A	\$145.00	0 to 20 mm (0-0.79 in)	Shielded	0 - 5 VDC or 1-5 mA	2 m (6.5') axial cable	Figure 1
AT9-05-1H	\$145.00				M12 (12 mm) connector	Figure 2
AT9-10-1A	\$145.00	0 to 20 mm (0-0.79 in)		0-10 VDC or 4-20 mA	2 m (6.5') axial cable	Figure 1
AT9-10-1H	\$145.00				M12 (12 mm) connector	Figure 2

Specifications		
Mounting Type	AT9-05-1*	AT9-10-1*
		Shielded
Nominal Sensing Distance	0 to 20 mm (0-0.79 in)	0 to 20 mm (0-0.79 in)
Operating Distance	NA	
Material Correction Factors	See Material Influence Table 2 later in this section.	
Output Type	0 to 5 VDC or 1 to 5 mA	0 to 10 VDC or 4 to 20 mA
Current Output Max. Load / Power Supply	1 kΩ / 10 VDC; 5 kΩ / 30 VDC	0.5 kΩ / 15 VDC; 1 kΩ / 30 VDC
Voltage Output Min. Load	500 Ω	1 kΩ
Operating Voltage	10 to 30 VDC	15 to 30 VDC
No-load Supply Current	≤10 mA	≤12 mA
Operating (Load) Current		
Off-state (Leakage) Current	NA	
Voltage Drop	≤2.0 V	
Switching Frequency	NA	
Differential Travel (% of Nominal Distance)	NA	
Repeat Accuracy	±0.05 mm	
Ripple	≤20%	
Response Time	5 ms	
Time Delay Before Availability (tv)	≤50ms	
Reverse Polarity Protection	Yes	
Short-Circuit Protection	Yes (switch auto-resets after overload is removed)	
Operating Temperature	-25° to +70° C (-13° to 158° F)	
Protection Degree (DIN 40050)	IEC IP67	
Indication/Switch Status	NA	
Housing Material	Chrome-plated brass	
Sensing Face Material	Polybutylene Terephthalate (PBT)	
Shock/Vibration	See Terminology Section	
Tightening Torque	60 Nm (44 lb-ft)	
Weight (cable/M8 connector)	190 g (6.71 oz.) / 135 g (4.76 oz.)	
Connection	2 m (6.5') axial cable or M12 (12 mm) connector	
Agency Approvals	UL file E328811	

Dimensions

mm [inches]

Figure 1



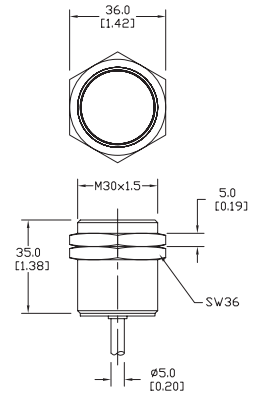


Figure 2

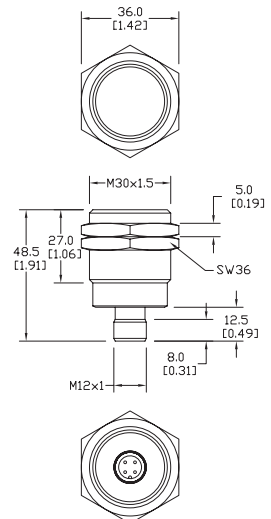

Wiring diagram



Connector

M12 connector



Sensors with M12 connectors must use 2M or 7M cables (4-wire).

UK1 Series Ultrasonic Sensors

M18 (18 mm) plastic – Discrete or analog output

- 15 to 30 VDC
- Discrete models available with adjustable sensitivity
- Analog output models available
- Models available with analog and discrete switching outputs
- Complete overload protection
- IP67 rated
- LED status indicators
- Mounting hex nuts included
- Purchase cable for M12 plug separately
- Lifetime warranty



M12 Quick Disconnect



2m Output Cable

UK 1A Series Ultrasonic Discrete or Analog Output Sensor Selection Chart						
Part Number	Price	Sensing Range	Output State	Connection	Wiring	Function
UK1A-EN-0E	\$99.00	50 to 400 mm (1.97 to 15.75 in)	NPN, NO/NC selectable	M12 quick disconnect	Diagram 1	1
UK1A-EN-0A	\$104.00		NPN, NO/NC selectable	2m output cable	Diagram 1	1
UK1A-EP-0E	\$99.00		PNP, NO/NC selectable	M12 quick disconnect	Diagram 2	1
UK1A-EP-0A	\$104.00		PNP, NO/NC selectable	2m output cable	Diagram 2	1
UK1A-E1-0E	\$105.00		0 to 10 VDC analog output	M12 quick disconnect	Diagram 3	2
UK1A-E1-0A	\$110.00		0 to 10 VDC analog output	2m output cable	Diagram 3	2
UK1A-E2-0E	\$105.00		4 to 20 mA analog output	M12 quick disconnect	Diagram 3	2
UK1A-E2-0A	\$110.00		4 to 20 mA analog output	2m output cable	Diagram 3	2
UK1A-E3-0E	\$105.00		NPN, 2 NO/NC selectable	M12 quick disconnect	Diagram 4	3
UK1A-E3-0A	\$110.00		NPN, 2 NO/NC selectable	2m output cable	Diagram 4	3
UK1A-E4-0E	\$109.00		4 to 20 mA analog output, NPN, NO/NC selectable	M12 quick disconnect	Diagram 5	4
UK1A-E4-0A	\$114.00		4 to 20 mA analog output, NPN, NO/NC selectable	2m output cable	Diagram 5	4
UK1A-E5-0E	\$105.00		PNP, 2 NO/NC selectable	M12 quick disconnect	Diagram 6	3
UK1A-E5-0A	\$110.00		PNP, 2 NO/NC selectable	2m output cable	Diagram 6	3
UK1A-E6-0E	\$109.00		4 to 20 mA analog output, PNP, NO/NC selectable	M12 quick disconnect	Diagram 7	4
UK1A-E6-0A	\$114.00		4 to 20 mA analog output, PNP, NO/NC selectable	2m output cable	Diagram 7	4
UK1A-E7-0E	\$109.00		0 to 10 VDC analog output, PNP, NO/NC selectable	M12 quick disconnect	Diagram 7	4
UK1A-E7-0A	\$114.00		0 to 10 VDC analog output, PNP, NO/NC selectable	2m output cable	Diagram 7	4
UK1A-E9-0E	\$109.00		0 to 10 VDC analog output, NPN, NO/NC selectable	M12 quick disconnect	Diagram 5	4
UK1A-E9-0A	\$114.00		0 to 10 VDC analog output, NPN, NO/NC selectable	2m output cable	Diagram 5	4

UK1 Series Ultrasonic Sensors

UK 1C Series Ultrasonic Discrete or Analog Output Sensor Selection Chart						
Part Number	Price	Sensing Range	Output State	Connection	Wiring	Function
UK1C-EN-0E	\$112.00	100 to 900 mm (3.94 to 35.43 in)	NPN, NO/NC selectable	M12 quick disconnect	Diagram 1	1
UK1C-EN-0A	\$117.00		NPN, NO/NC selectable	2m output cable	Diagram 1	1
UK1C-EP-0E	\$112.00		PNP, NO/ NC selectable	M12 quick disconnect	Diagram 2	1
UK1C-EP-0A	\$117.00		PNP, NO/NC selectable	2m output cable	Diagram 2	1
UK1C-E1-0E	\$115.00		0 to 10 VDC analog output	M12 quick disconnect	Diagram 3	2
UK1C-E1-0A	\$120.00		0 to 10 VDC analog output	2m output cable	Diagram 3	2
UK1C-E2-0E	\$115.00		4 to 20 mA analog output	M12 quick disconnect	Diagram 3	2
UK1C-E2-0A	\$120.00		4 to 20 mA analog output	2m output cable	Diagram 3	2
UK1C-E3-0E	\$115.00		NPN, 2 NO/NC selectable	M12 quick disconnect	Diagram 4	3
UK1C-E3-0A	\$120.00		NPN, 2 NO/NC selectable	2m output cable	Diagram 4	3
UK1C-E4-0E	\$119.00		4 to 20 mA analog output, NPN, NO/NC selectable	M12 quick disconnect	Diagram 5	4
UK1C-E4-0A	\$124.00		4 to 20 mA analog output, NPN, NO/NC selectable	2m output cable	Diagram 5	4
UK1C-E5-0E	\$115.00		PNP, 2 NO/ NC selectable	M12 quick disconnect	Diagram 6	3
UK1C-E5-0A	\$120.00		PNP, 2 NO/ NC selectable	2m output cable	Diagram 6	3
UK1C-E6-0E	\$119.00		4 to 20 mA analog output, PNP, NO/NC selectable	M12 quick disconnect	Diagram 7	4
UK1C-E6-0A	\$124.00		4 to 20 mA analog output, PNP, NO/NC selectable	2m output cable	Diagram 7	4
UK1C-E7-0E	\$119.00		0 to 10 VDC analog output, PNP, NO/NC selectable	M12 quick disconnect	Diagram 7	4
UK1C-E7-0A	\$124.00		0 to 10 VDC analog output, PNP, NO/NC selectable	2m output cable	Diagram 7	4
UK1C-E9-0E	\$119.00		0 to 10 VDC analog output, NPN, NO/NC selectable	M12 quick disconnect	Diagram 5	4
UK1C-E9-0A	\$124.00		0 to 10 VDC analog output, NPN, NO/NC selectable	2m output cable	Diagram 5	4


UK 1D Series Ultrasonic Discrete or Analog Output Sensor Selection Chart						
Part Number	Price	Sensing Range	Output State	Connection	Wiring	Function
UK1D-EN-0E	\$122.00	150 to 1600 mm (5.90 to 62.99 in)	NPN, NO/NC selectable	M12 quick disconnect	Diagram 1	1
UK1D-EN-0A	\$127.00		NPN, NO/NC selectable	2m output cable	Diagram 1	1
UK1D-EP-0E	\$122.00		PNP, NO/ NC selectable	M12 quick disconnect	Diagram 2	1
UK1D-EP-0A	\$127.00		PNP, NO/NC selectable	2m output cable	Diagram 2	1
UK1D-E1-0E	\$125.00		0 to 10 VDC analog output	M12 quick disconnect	Diagram 3	2
UK1D-E1-0A	\$130.00		0 to 10 VDC analog output	2m output cable	Diagram 3	2
UK1D-E2-0E	\$125.00		4 to 20 mA analog output	M12 quick disconnect	Diagram 3	2
UK1D-E2-0A	\$130.00		4 to 20 mA analog output	2m output cable	Diagram 3	2
UK1D-E3-0E	\$125.00		NPN, 2 NO/NC selectable	M12 quick disconnect	Diagram 4	3
UK1D-E3-0A	\$130.00		NPN, 2 NO/NC selectable	2m output cable	Diagram 4	3
UK1D-E4-0E	\$129.00		4 to 20 mA analog output, NPN, NO/NC selectable	M12 quick disconnect	Diagram 5	4
UK1D-E4-0A	\$134.00		4 to 20 mA analog output, NPN, NO/NC selectable	2m output cable	Diagram 5	4
UK1D-E5-0E	\$125.00		PNP, 2 NO/ NC selectable	M12 quick disconnect	Diagram 6	3
UK1D-E5-0A	\$130.00		PNP, 2 NO/ NC selectable	2m output cable	Diagram 6	3
UK1D-E6-0E	\$129.00		4 to 20 mA analog output, PNP, NO/NC selectable	M12 quick disconnect	Diagram 7	4
UK1D-E6-0A	\$134.00		4 to 20 mA analog output, PNP, NO/NC selectable	2m output cable	Diagram 7	4
UK1D-E7-0E	\$129.00		0 to 10 VDC analog output, PNP, NO/NC selectable	M12 quick disconnect	Diagram 7	4
UK1D-E7-0A	\$134.00		0 to 10 VDC analog output, PNP, NO/NC selectable	2m output cable	Diagram 7	4
UK1D-E9-0E	\$129.00		0 to 10 VDC analog output, NPN, NO/NC selectable	M12 quick disconnect	Diagram 5	4
UK1D-E9-0A	\$134.00		0 to 10 VDC analog output, NPN, NO/NC selectable	2m output cable	Diagram 5	4

UK1 Series Ultrasonic Sensors


UK 1F Series Ultrasonic Discrete or Analog Output Sensor Selection Chart						
Part Number	Price	Sensing Range	Output State	Connection	Wiring	Function
UK1F-EN-0E	\$135.00	200 to 2200 mm (7.87 to 86.61 in)	NPN, NO/NC selectable	M12 quick disconnect	Diagram 1	1
UK1F-EN-0A	\$140.00		NPN, NO/NC selectable	2m output cable	Diagram 1	1
UK1F-EP-0E	\$135.00		PNP, NO/ NC selectable	M12 quick disconnect	Diagram 2	1
UK1F-EP-0A	\$140.00		PNP, NO/NC selectable	2m output cable	Diagram 2	1
UK1F-E1-0E	\$139.00		0 to 10 VDC analog output	M12 quick disconnect	Diagram 3	2
UK1F-E1-0A	\$144.00		0 to 10 VDC analog output	2m output cable	Diagram 3	2
UK1F-E2-0E	\$139.00		4 to 20 mA analog output	M12 quick disconnect	Diagram 3	2
UK1F-E2-0A	\$144.00		4 to 20 mA analog output	2m output cable	Diagram 3	2
UK1F-E3-0E	\$139.00		NPN, 2 NO/NC selectable	M12 quick disconnect	Diagram 4	3
UK1F-E3-0A	\$144.00		NPN, 2 NO/NC selectable	2m output cable	Diagram 4	3
UK1F-E4-0E	\$144.00		4 to 20 mA output, NPN, NO/NC selectable	M12 quick disconnect	Diagram 5	4
UK1F-E4-0A	\$149.00		4 to 20 mA output, NPN, NO/NC selectable	2m output cable	Diagram 5	4
UK1F-E5-0E	\$139.00		PNP, 2 NO/ NC selectable	M12 quick disconnect	Diagram 6	3
UK1F-E5-0A	\$144.00		PNP, 2 NO/ NC selectable	2m output cable	Diagram 6	3
UK1F-E6-0E	\$144.00		4 to 20 mA analog output, PNP, NO/NC selectable	M12 quick disconnect	Diagram 7	4
UK1F-E6-0A	\$149.00		4 to 20 mA analog output, PNP, NO/NC selectable	2m output cable	Diagram 7	4
UK1F-E7-0E	\$144.00		0 to 10 VDC analog output, PNP, NO/NC selectable	M12 quick disconnect	Diagram 7	4
UK1F-E7-0A	\$149.00		0 to 10 VDC analog output, PNP, NO/NC selectable	2m output cable	Diagram 7	4
UK1F-E9-0E	\$144.00		0 to 10 VDC analog output, NPN, NO/NC selectable	M12 quick disconnect	Diagram 5	4
UK1F-E9-0A	\$149.00		0 to 10 VDC analog output, NPN, NO/NC selectable	2m output cable	Diagram 5	4

Dimensions

mm [inches]

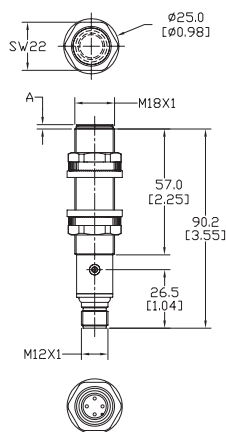

DIMENSION TABLE	
DRAWING NO.	DIM A
UK1A and UK1C	1.0 [0.04]
UK1D	1.5 [0.06]
UK1F	2.5 [0.08]

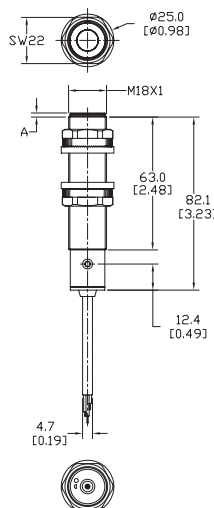

DIMENSION TABLE	
DRAWING NO.	DIM A
UK1A and UK1C	1.0 [0.04]
UK1D	1.5 [0.06]
UK1F	2.5 [0.08]

UK1 Series Ultrasonic Sensors

Specifications				
Model	UK1A	UK1C	UK1D	UK1F
Nominal Sensing Distance	50-400 mm (1.97 to 15.75 in)	100-900 mm (3.94 to 35.43 in)	150-1600 mm (5.90 to 62.99 in)	200-2200 mm (7.87 to 86.61 in)
Operating Distance (Sensing Range)	100-400 mm (3.94 to 15.75 in)	100-900 mm (3.94 to 35.43 in)	150-1600 mm (5.90 to 62.99 in)	200-2200 mm (7.87 to 86.61 in)
Output Type	See "Output State" column in selection chart			
Operating Voltage	15 to 30 VDC			
No-load Supply Current	≤50 mA			
Operating (Load) Current	100 mA			
Off-state (Leakage) Current	10 µA @ 30 VDC			
Analog Output	Voltage: minimum load is 3 kOhms / Current: maximum load is 500 Ohms at 24 VDC supply			
Voltage Drop	2.2 volts max @ 100 mA			
Switching Frequency	10 Hz	4 Hz	2 Hz	1 Hz
Repeat Accuracy	0.5%			
Time Delay Before Availability (tv)	≤500 ms; ≤900 ms (UK1*-E5/E3-0*)			
Reverse Polarity Protection	Yes			
Short-Circuit Protection	Yes			
Linearity Error	<1%			
Ultrasonic Frequency	400 kHz	300 kHz	230 kHz	200 kHz
Ultrasonic Beam Angle	±8°	±7°	±8°	±7°
Max. Response Time (digital output)	50 ms	125 ms	250 ms	500 ms
Sensitivity Adjustment	Yes, via teach-in button			
Input Voltage Transient Protection	Yes			
Operating Temperature	-20° to 60°C (-4° to 140°F)			
Temperature Compensation	Yes			
Protection Degree	IEC IP67			
Indication/Switch Status	Multi-function LED indicator			
Housing Material	Polybutylene Terephthalate (PBT)			
Shock/Vibration	See Terminology Section			
Tightening Torque	1 Nm (0.737 lb-ft)			
Weight	35 g (1.23 oz) (plug exit) 88 g (3.10 oz) (cable exit)			
Connection	M12 (12 mm) connector or 2 m prewired output cable			
Agency Approvals	CE, cULus file E187310, RoHS			

Wiring Diagrams

Diagram 1




Diagram 2




Diagram 3




Diagram 4




Diagram 5




Diagram 6






Diagram 7




Connector




UK1 Series Ultrasonic Sensors

Characteristic Curves


UK1A models

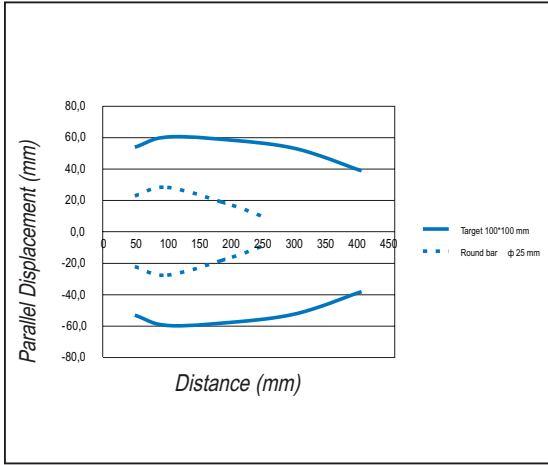


UK1C models

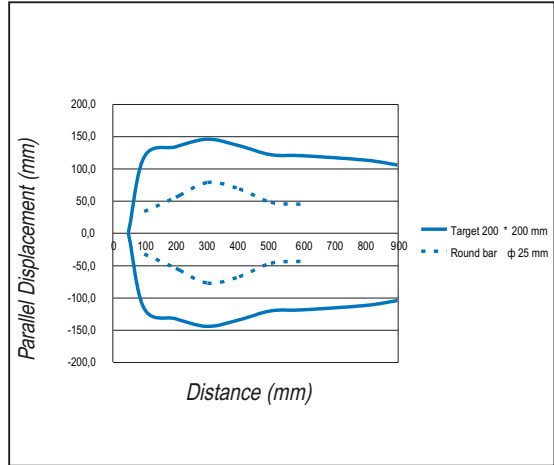

UK1D models

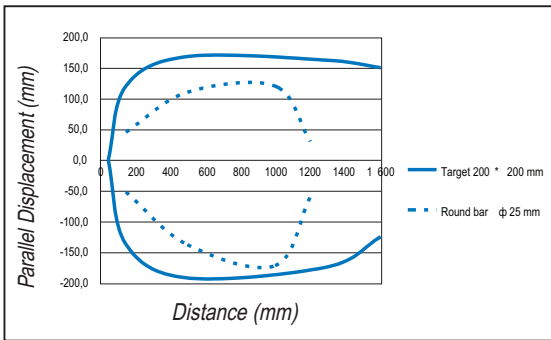

UK1F models

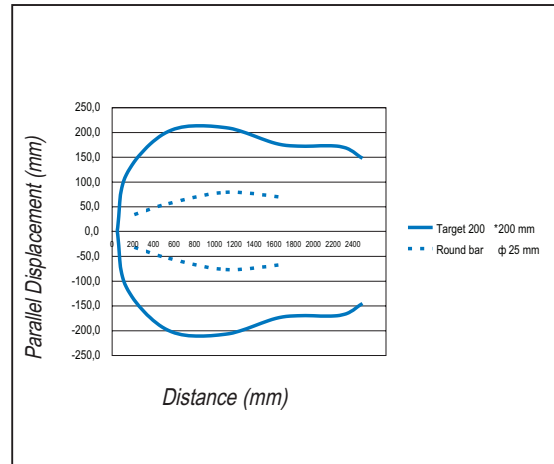

UK1 Series Ultrasonic Sensors

Functions


Models with single digital output

#1




Models with single analog output

#2

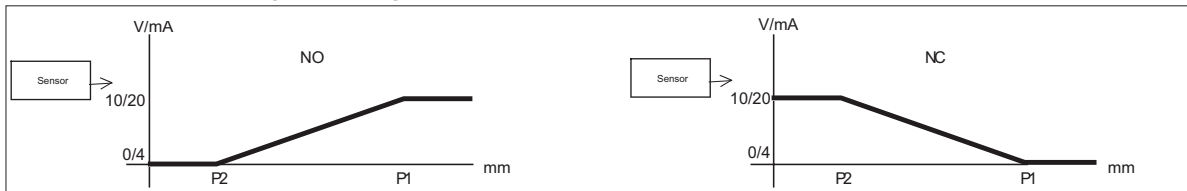


Models with double digital output

#3

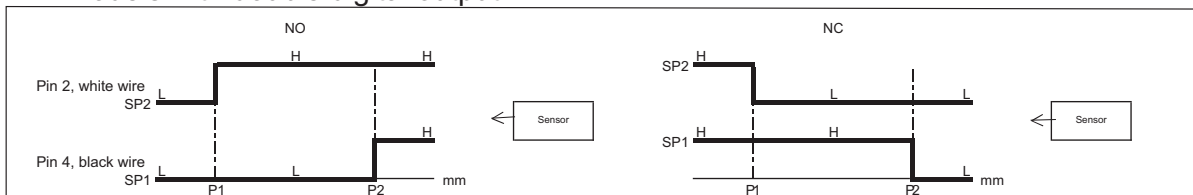

Models with digital output + analog output

#4

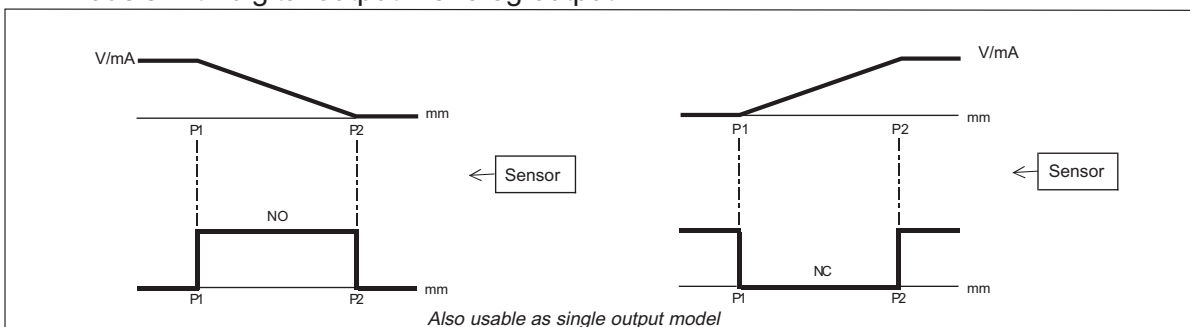

Also usable as single output model

Note: P1 maximum selected working distance and first point to select
 P2 minimum selected working distance and second point to select

UK6 Series Ultrasonic Sensors

M18 (18 mm) plastic – Discrete or analog output

- 15 to 30 VDC
- Discrete models available with adjustable sensitivity
- Analog output models available
- Models available with analog or discrete switching outputs
- Short body for flexible mounting
- Complete overload protection
- IP67 rated
- LED status indicators
- Mounting hex nuts included
- Purchase cable for M12 plug separately
- Lifetime warranty



UK6A-D1-0A with 2m Output Cable



UK6A-D1-0E with M12 Quick Disconnect

UK6A Series Ultrasonic Discrete or Analog Output Sensor Selection Chart						
Part Number	Price	Sensing Range	Output State	Connection	Wiring	Function
UK6A-D1-0A	\$99.00	40-300 mm (1.57— 11.81 in)	0-10 VDC analog output	2 m output cable	Diagram 1	2
UK6A-D1-0E	\$95.00		0-10 VDC analog output	M12 quick disconnect	Diagram 1	2
UK6A-D2-0A	\$99.00		4-20 mA analog output	2 m output cable	Diagram 1	2
UK6A-D2-0E	\$95.00		4-20 mA analog output	M12 quick disconnect	Diagram 1	2
UK6A-DN-0A	\$99.00		NPN, NO/NC selectable	2 m output cable	Diagram 2	1
UK6A-DN-0E	\$89.00		NPN, NO/NC selectable	M12 quick disconnect	Diagram 2	1
UK6A-DP-0A	\$99.00		PNP, NO/NC selectable	2 m output cable	Diagram 3	1
UK6A-DP-0E	\$89.00		PNP, NO/NC selectable	M12 quick disconnect	Diagram 3	1

UK6C Series Ultrasonic Discrete or Analog Output Sensor Selection Chart						
Part Number	Price	Sensing Range	Output State	Connection	Wiring	Function
UK6C-D1-0A	\$110.00	120-900 mm (4.72 to 35.43 in)	0-10 VDC analog output	2 m output cable	Diagram 1	2
UK6C-D1-0E	\$105.00		0-10 VDC analog output	M12 quick disconnect	Diagram 1	2
UK6C-D2-0A	\$110.00		4-20 mA analog output	2 m output cable	Diagram 1	2
UK6C-D2-0E	\$105.00		4-20 mA analog output	M12 quick disconnect	Diagram 1	2
UK6C-DN-0A	\$110.00		NPN, NO/NC selectable	2 m output cable	Diagram 2	1
UK6C-DN-0E	\$105.00		NPN, NO/NC selectable	M12 quick disconnect	Diagram 2	1
UK6C-DP-0A	\$110.00		PNP, NO/NC selectable	2 m output cable	Diagram 3	1
UK6C-DP-0E	\$105.00		PNP, NO/NC selectable	M12 quick disconnect	Diagram 3	1

Wiring Diagrams

Diagram 1




Diagram 2







Diagram 3




Connector



For Diagram 1 and 2




For Diagram 3



UK6 Series Ultrasonic Sensors

Specifications		
Model	UK6A	UK6C
Nominal Sensing Distance	40-300 mm (1.57 to 11.81 in)	120-900 mm (4.72 to 35.43 in)
Operating Distance (Sensing Range)	40-300 mm (1.57 to 11.81 in)	120-900 mm (4.72 to 35.43 in)
Output Type	See "Output State" column in selection chart	
Operating Voltage	15-30 VDC	
No-load Supply Current	≤35 mA	
Operating (Load) Current	100 mA	
Off-state (Leakage) Current	10 µA @ 30 VDC	
Analog Output	Voltage: minimum load is 3 kOhms / Current: maximum load is 500 Ohms at 24 VDC supply	
Voltage Drop	2.2 volts max@ 100 mA	
Switching Frequency	20Hz	6Hz
Repeat Accuracy	2%	
Time Delay Before Availability (tv)	≤ 300 ms (digital output) ≤ 900 ms (analog output)	
Reverse Polarity Protection	Yes	
Short-Circuit Protection	Yes	
Linearity Error	<3%	
Ultrasonic Frequency	300 kHz	
Ultrasonic Beam Angle	± 10°	± 8°
Max. Response Time (digital output)	25 ms	83 ms
Sensitivity Adjustment	Remote teach-in via cable	
Input Voltage Transient Protection	Yes	
Operating Temperature	-20° to -60°C (-4° to 140°F)	
Temperature Compensation	Yes	
Protection Degree	IEC IP67	
Indication/Switch Status	Multi-function LED indicator	
Housing Material	Polybutylene Terephthalate (PBT)	
Shock/Vibration	See Terminology Section	
Tightening Torque	1Nm (0.737 lb-ft)	
Weight	15 g (0.53 oz) (plug exit) 80 g (2.82 oz) (cable exit)	
Connection	M12 (12 mm) connector or 2 m prewired output cable	
Agency Approvals	CE, cULus file E187310, RoHS	


Dimensions mm [inches]

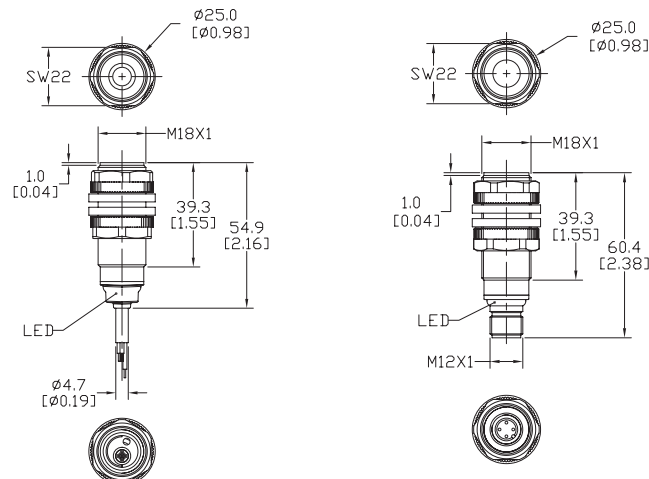


UK6 Series Ultrasonic Sensors

Characteristic Curves

UK6A models

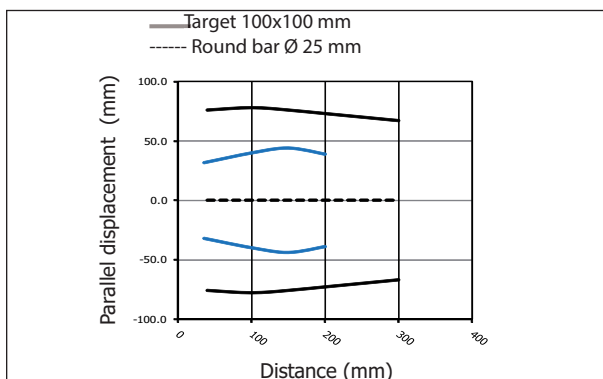


UK6C models


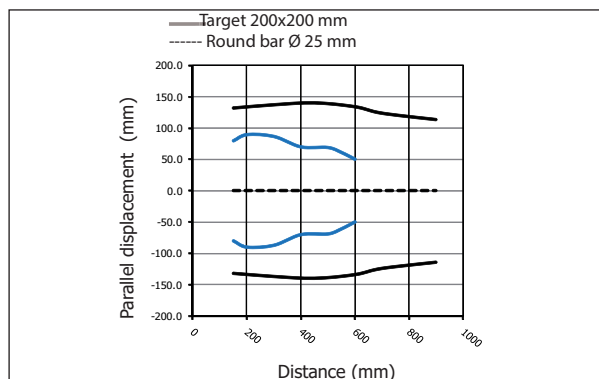


Functions

Models with single digital output



Models with single analog output

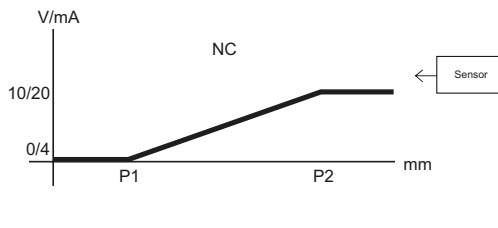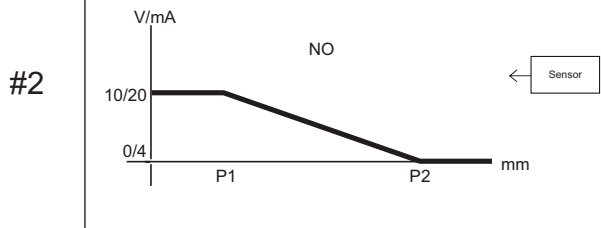

UT1 Series Ultrasonic Sensors

M30 (30 mm) plastic – Discrete or analog output

- 12-30 VDC, 15 to 30 VDC (0 to 10 VDC)
- Discrete models available with adjustable sensitivity
- Analog output models available
- Models available with analog and discrete switching outputs
- Complete overload protection
- IP67 rated
- LED status indicators
- Mounting hex nuts included
- Purchase cable for M12 plug separately
- Lifetime warranty



UT1B-E4-0E




UT1B-E4-0A


UT 1B Series Ultrasonic Discrete or Analog Output Sensor Selection Chart						
Part Number	Price	Sensing Range	Output State	Connection	Wiring	Function
UT1B-E4-0E	\$185.00	250 to 3500 mm (9.84 to 137.8 in)	4 to 20 mA analog output, NPN, NO/NC selectable	M12 quick disconnect	Diagram 5	4
UT1B-E4-0A	\$189.00		4 to 20 mA analog output, NPN, NO/NC selectable	2 m output cable	Diagram 5	4
UT1B-E6-0E	\$185.00		4 to 20 mA analog output, PNP, NO/NC selectable	M12 quick disconnect	Diagram 7	4
UT1B-E6-0A	\$189.00		4 to 20 mA analog output, PNP, NO/NC selectable	2 m output cable	Diagram 7	4
UT1B-E7-0E	\$185.00		0 to 10 VDC analog output, PNP, NO/NC selectable	M12 quick disconnect	Diagram 7	4
UT1B-E7-0A	\$189.00		0 to 10 VDC analog output, PNP, NO/NC selectable	2 m output cable	Diagram 7	4
UT1B-E9-0E	\$185.00		0 to 10 VDC analog output, NPN, NO/NC selectable	M12 quick disconnect	Diagram 5	4
UT1B-E9-0A	\$189.00		0 to 10 VDC analog output, NPN, NO/NC selectable	2 m output cable	Diagram 5	4
UT1B-EM-0E	\$185.00		NPN, 2 outputs, hysteresis + window functions	M12 quick disconnect	Diagram 4	5
UT1B-EM-0A	\$189.00		NPN, 2 outputs, hysteresis + window functions	2 m output cable	Diagram 4	5
UT1B-EW-0E	\$185.00		PNP, 2 outputs, hysteresis + window functions	M12 quick disconnect	Diagram 6	5
UT1B-EW-0A	\$189.00		PNP, 2 outputs, hysteresis + window functions	2 m output cable	Diagram 6	5

Dimensions

mm [inches]

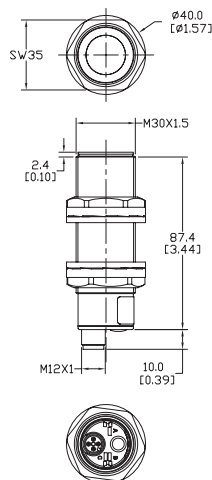

UT1 Series M12 Quick Disconnect

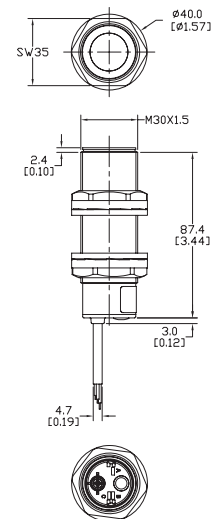

UT1 Series 2m Cable

UT1 Series Ultrasonic Sensors

Specifications	
Model	UT1B
Nominal Sensing Distance	250 mm – 3500 mm (9.84 in – 137.80 in)
Operating Distance (Sensing Range)	250 mm – 3500 mm (9.84 in – 137.80 in)
Output Type	See "Output State" column in selection chart
Operating Voltage	12 – 30 VDC; 15 – 30 VDC (for 0 – 10 VDC analog models)
No-load Supply Current	≤50 mA
Operating (Load) Current	100 mA
Off-state (Leakage) Current	Voltage: minimum load is 3 kOhms / Current: maximum load is 500 Ohms at 24 VDC supply
Analog Output	Voltage: minimum load is 3 kΩ / Current: maximum load is 500 Ω at 24 VDC supply
Voltage Drop	2.2 V max@ 100 mA
Switching Frequency	2 Hz
Repeat Accuracy	0.2%
Time Delay Before Availability (tv)	≤300 ms; <900 ms for UT1B-EM/W-0*
Reverse Polarity Protection	Yes
Short-Circuit Protection	Yes
Linearity Error	0.5%
Ultrasonic Frequency	112 kHz
Ultrasonic Beam Angle	12° ± 2°
Max. Response Time (digital output)	250 ms
Sensitivity Adjustment	Yes, via teach-in button
Input Voltage Transient Protection	Yes
Operating Temperature	-20° to +70°C (-4° to +158°F)
Temperature Compensation	Yes
Protection Degree	IEC IP67
Indication/Switch Status	Multi-function LED indicator
Housing Material	Polybutylene Terephthalate (PBT)
Shock/Vibration	See Terminology Section
Tightening Torque	1 Nm (0.737 lb-ft)
Weight	90 g (3.17 oz) (plug exit) 160 g (5.64 oz) (cable exit)
Connection	M12 (12 mm) connector or 2 m prewired output cable
Agency Approvals	CE, cULus file E187310, RoHS

Wiring Diagrams

Diagram 1




Diagram 2




Diagram 3





Diagram 4



Connector


M12 connector



UT1 Series Ultrasonic Sensors


Characteristic Curves

UT1B models

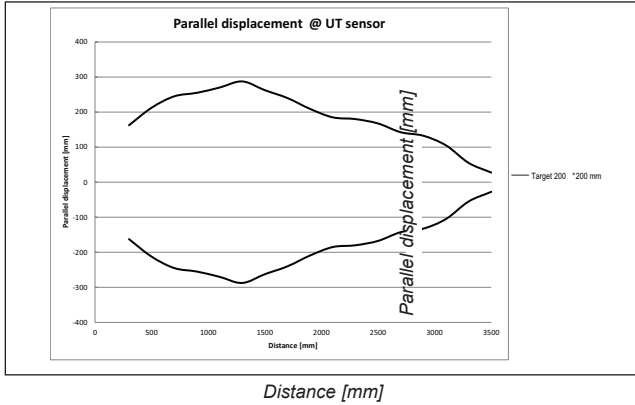


Functions

Models with digital output + analog output

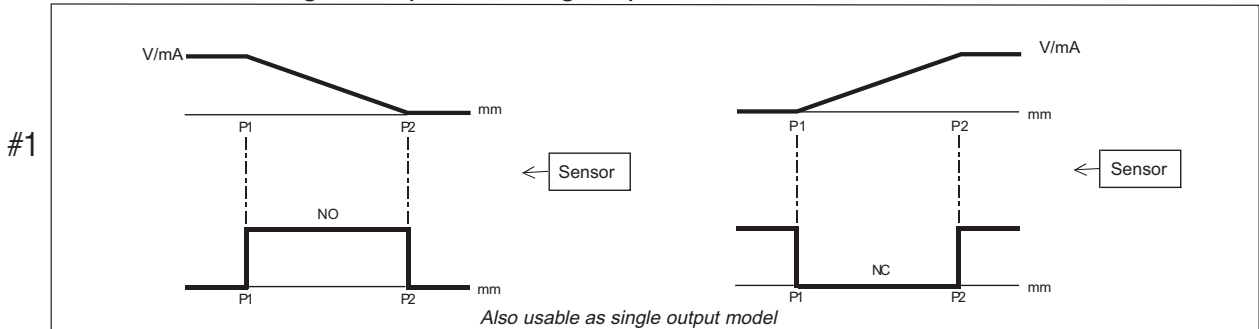

Note: P1 maximum selected working distance and first point to select
 P2 minimum selected working distance and second point to select


Models with double digital output: hysteresis or standard window

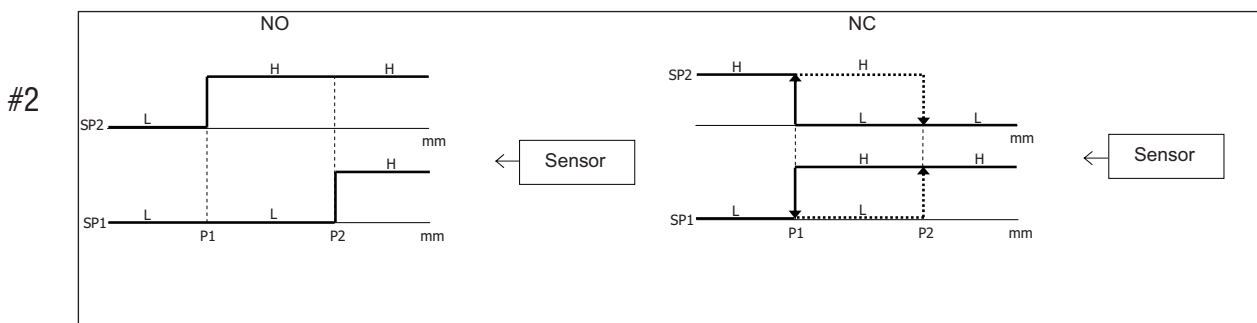

UT2 Series Ultrasonic Sensors

M30 (30 mm) plastic – Discrete or analog output

- 12 to 30 VDC or 15 to 30 VDC powered (model dependent)
- Discrete models available with adjustable sensitivity
- Analog output models available
- Models available with analog or discrete switching outputs
- Sensing distances up to 6m
- Complete overload protection
- IP67 rated
- LED status indicators
- Mounting hex nuts included
- Purchase cable for M12 plug separately
- Lifetime warranty




M12 Quick Disconnect

2m Output Cable


UT 2F Series Ultrasonic Discrete or Analog Output Sensor Selection Chart						
Part Number	Price	Sensing Range	Output State	Connection	Wiring	Function
UT2F-E7-0E	\$270.00	350–6000 mm (13.8 in–236.22 in)	0–10 VDC analog output, PNP, NO/NC selectable	M12 quick disconnect	Diagram 1	1
UT2F-E7-0A	\$270.00		0–10 VDC analog output, PNP, NO/NC selectable	2 m output cable	Diagram 1	1
UT2F-E9-0E	\$270.00		0–10 VDC analog output, NPN, NO/NC selectable	M12 quick disconnect	Diagram 2	1
UT2F-E9-0A	\$270.00		0–10 VDC analog output, NPN, NO/NC selectable	2 m output cable	Diagram 2	1
UT2F-E6-0E	\$270.00		4–20 mA analog output, PNP, NO/NC selectable	M12 quick disconnect	Diagram 1	1
UT2F-E6-0A	\$270.00		4–20 mA analog output, PNP, NO/NC selectable	2 m output cable	Diagram 1	1
UT2F-E4-0E	\$270.00		4–20 mA analog output, NPN, NO/NC selectable	M12 quick disconnect	Diagram 2	1
UT2F-E4-0A	\$270.00		4–20 mA analog output, NPN, NO/NC selectable	2 m output cable	Diagram 2	1
UT2F-EW-0E	\$270.00		PNP, 2 outputs, hysteresis + window functions	M12 quick disconnect	Diagram 3	2
UT2F-EW-0A	\$270.00		PNP, 2 outputs, hysteresis + window functions	2 m output cable	Diagram 3	2
UT2F-EM-0E	\$270.00		NPN, 2 outputs, hysteresis + window functions	M12 quick disconnect	Diagram 4	2
UT2F-EM-0A	\$270.00		NPN, 2 outputs, hysteresis + window functions	2 m output cable	Diagram 4	2

Dimensions

mm [inches]

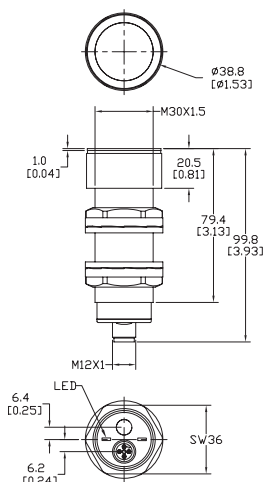

UT2 Series M12 Quick Disconnect

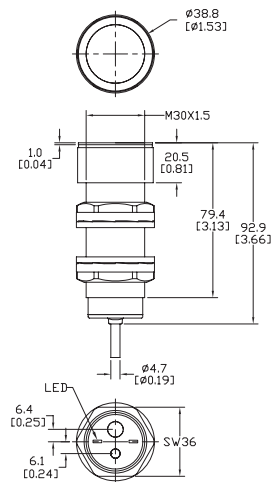

UT2 Series 2m Cable

UT2 Series Ultrasonic Sensors

Specifications	
Model	UT2F
Nominal Sensing Distance	350 mm – 6000 mm (13.78 in – 236.22 in)
Operating Distance (Sensing Range)	350 mm – 6000 mm (13.78 in – 236.22 in)
Output Type	See "Output State" column in selection chart
Operating Voltage	12 – 30 VDC; 15 – 30 VDC (for 0 – 10 VDC analog models)
No-load Supply Current	≤50 mA
Operating (Load) Current	100 mA
Off-state (Leakage) Current	<10 μA (VDC max)
Analog Output	Voltage: minimum load is 3 kΩ / Current: maximum load is 500 Ω at 24 VDC supply
Voltage Drop	2.2 V max @ 100 mA
Switching Frequency	1 Hz
Repeat Accuracy	0.5%
Time Delay Before Availability (tv)	≤≤300; ≤≤900 ms for UT2F-EW-0*, UT2F-EM-0*
Reverse Polarity Protection	Yes
Short-Circuit Protection	Yes
Linearity Error	1%
Ultrasonic Frequency	75 kHz
Ultrasonic Beam Angle	15° ± 2°
Max. Response Time (digital output)	500 ms
Sensitivity Adjustment	Yes, via teach-in button
Input Voltage Transient Protection	Yes
Operating Temperature	-20° to +70°C (-4° to +158°F)
Temperature Compensation	Yes
Protection Degree	IEC IP67
Indication/Switch Status	Multi-function LED indicator
Housing Material	Polybutylene Terephthalate (PBT)
Shock/Vibration	See Terminology Section
Tightening Torque	1 Nm (0.737 lb-ft)
Weight	130 g (4.59 oz) (plug exit) 199 g (7.02 oz) (cable exit)
Connection	M12 (12 mm) connector or 2 m prewired output cable
Agency Approvals	CE, cULus file E187310, RoHS

Wiring Diagrams

Diagram 1




Diagram 2




Diagram 3





Diagram 4



Connector


M12 connector



UT2 Series Ultrasonic Sensors


Characteristic Curves

UT2F models

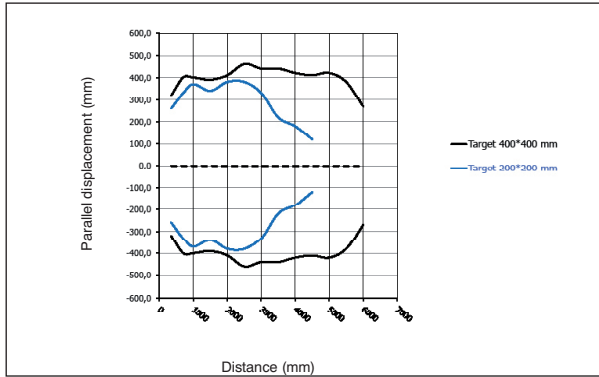


Functions

Models with digital output + analog output

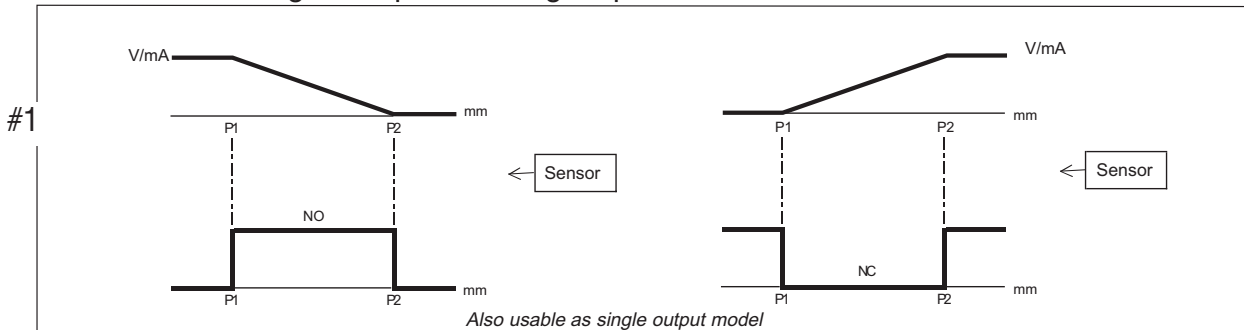

Note: P1 maximum selected working distance and first point to select
 P2 minimum selected working distance and second point to select

Models with double digital output: hysteresis or standard window

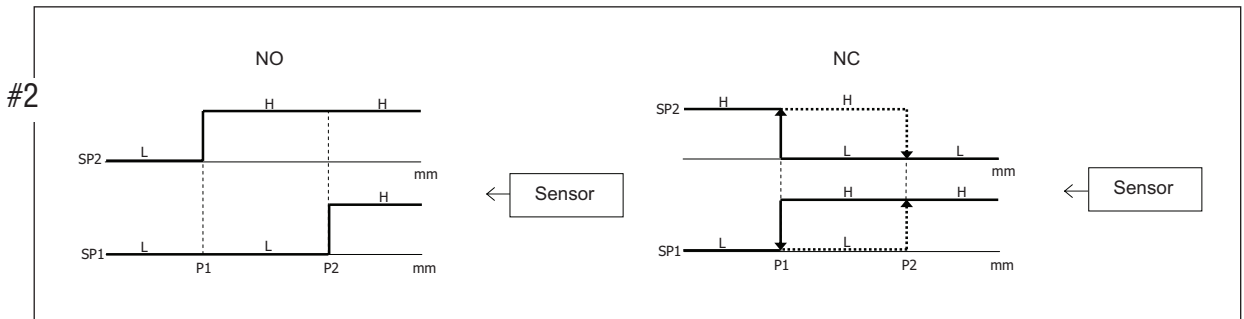

SU Series Ultrasonic Sensors



M18 (18 mm) plastic –PNP or analog output

- High resolution
- 2 PNP models with adjustable sensitivity
- 3 analog models available
- Complete overload protection
- IP67 rated
- LED status indicator on PNP models
- Purchase cable separately (for quick-disconnect model)
- Lifetime warranty



SU Series Ultrasonic DC Output Sensor Selection Chart

Part Number	Price	Sensing Range	Output State	Logic	Connection	Wiring
SU1-B0-0A	\$282.00	100 to 600 mm (3.94-23.62 in)	NO	PNP	2 m (6.5') axial cable	Diagram 1
SU2-A0-0A	\$228.75	200 to 1500 mm (7.87-59.06 in)		PNP	2 m (6.5') axial cable	

SU Series Ultrasonic Analog Output Sensor Selection Chart

Part Number	Price	Sensing Range	Output	Connection	Wiring
SU1-B1-0A	\$282.00	100 to 600 mm (3.94-23.62 in)	0-10 VDC	2 m (6.5') axial cable	Diagram 2
SU1-B1-0E	\$282.00			M12 (12 mm) connector	
SU2-A1-0E	\$282.00	200 to 1500 mm (7.87-59.06 in)		M12 (12 mm) connector	


Specifications

	SU1-B0-0A	SU2-A0-0A	SU1-B1-0*	SU2-A1-0E
Mounting Type				
Nominal Sensing Distance	100 to 600 mm (3.94-23.62 in)	200 to 1500 mm (7.87-59.06 in)	100 to 600 mm (3.94-23.62 in)	200 to 1500 mm (7.87-59.06 in)
Operating Distance	NA			
Output Type	PNP / NO		0-10 VDC	
Operating Voltage	15-30 VDC		18-30 VDC	
No-load Supply Current			≤35 mA	
Operating (Load) Current	≤500 mA		≤5 mA	
Off-state (Leakage) Current			≤10 µA	
Voltage Drop	≤2.5 volts			
Switching Frequency	25 Hz	8 Hz	NA	
Differential Travel	±2.5%	±2.0%		
Repeat Accuracy	0.2%		±2 mm	
Time Delay Before Availability (tv)	≤200 ms		≤500 ms	
Reverse Polarity Protection	Yes			
Short-Circuit Protection	Yes (switch auto-resets after overload is removed)			
Linearity Error	-		≤0.3%	
Ultrasonic Frequency	300 kHz	180 kHz	300 kHz	180 kHz
Ultrasonic Beam Angle	8°			
Max. Response Time	-		50 ms	150 ms
Control Input	Hold / Sync			
Sensitivity Adjustment	Yes		-	
Input Voltage Transient Protection	Yes, only if transient peak does not exceed 30 VDC			
Operating Temperature	-25° to +70°C (-13° to 158°F)			
Temperature Compensation	Yes			
Protection Degree	IEC IP67			
Indication/Switch Status	Yellow (output energized)		-	
Housing Material	Polybutylene Terephthalate (PBT)			
Shock/Vibration	See Terminology Section			
Tightening Torque	3 Nm (2.21 lb-ft)			
Weight (cable/connector)	54 g (1.90 oz) / 38 g (1.34 oz.)			
Connection	2 m (6.5') axial cable		2 m (6.5') axial cable or M12 (12 mm) connector	
Agency Approvals	CE, UL listed file E187310			

SU Series Ultrasonic Sensors

Dimensions

mm [inches]

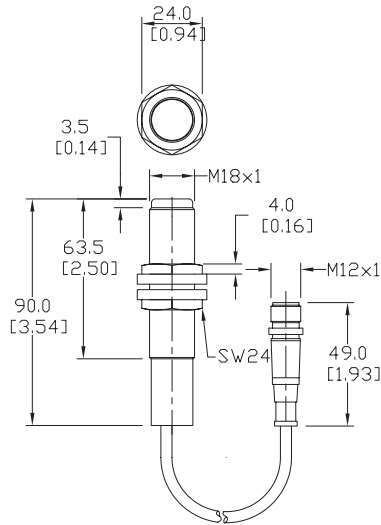

Wiring Diagrams

Diagram 1*


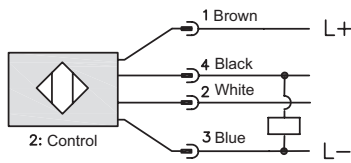


Diagram 2*



*Note: Control wire can be used to inhibit sensor or to synchronize with another sensor.


Connector




Must be used with 2M or 7M cable (4-wire)

Characteristic Curves


Analog Output



Detection Area SU1 Analog output

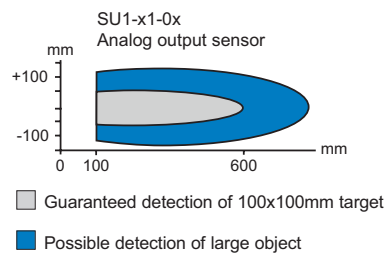

Detection Area SU2 Analog output

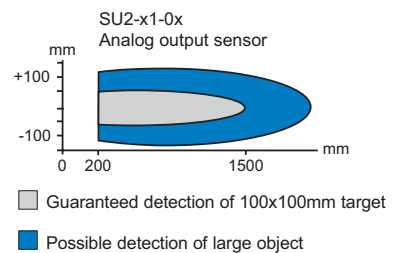

TU Series Ultrasonic Sensors



M30 (30 mm) plastic – PNP or Analog Output

- High resolution
- PNP output model with adjustable sensitivity
- Complete overload protection
- IP67 rated
- LED status indicator on PNP models
- Purchase cable separately
- Lifetime warranty




TU Series Ultrasonic PNP Output Sensor Selection Chart						
Part Number	Price	Sensing Range	Output State	Logic	Connection	Wiring
TU1-C0-0E	\$302.00	300 to 2500 mm (11.81-98.43 in)	NO	PNP	M12 (12 mm) connector	Diagram 1

TU Series Ultrasonic Analog Output Sensor Selection Chart					
Part Number	Price	Sensing Range	Output	Connection	Wiring
TU1-C1-0E	\$302.00	300 to 2500 mm (11.81-98.43 in)	0 to 10 VDC	M12 (12 mm) connector	Diagram 2

Dimensions

mm [inches]

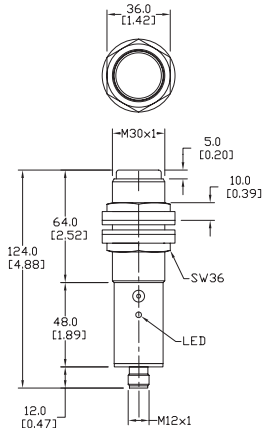

Specifications		
Mounting Type	TU1-C0-0E	TU1-C1-0E
Nominal Sensing Distance	300 to 2500 mm (11.81-98.43 in)	300 to 2500 mm (11.81-98.43 in)
Operating Distance	NA	NA
Output Type	PNP / NO	0 to 10 VDC
Operating Voltage	19 to 30 VDC	
No-load Supply Current	≤35 mA	
Operating (Load) Current	≤500 mA	≤5 mA
Off-state (Leakage) Current	≤10 μA	
Voltage Drop	≤2.5 volts	NA
Switching Frequency	1 Hz	NA
Differential Travel	±2.0%	NA
Repeat Accuracy	0.2%	±2 mm
Linearity Error	-	≤0.3%
Ultrasonic Frequency	130 kHz	
Ultrasonic Beam Angle	8°	
Max. Response Time	-	100 ms
Time Delay Before Availability (tv)	≤200 ms	≤1 s
Control Input	Hold / Sync	
Sensitivity Adjustment	Yes	-
Reverse Polarity Protection	Yes	
Short-Circuit Protection	Yes (switch auto-resets after overload is removed)	
Operating Temperature	-25° to +70°C (-13° to 158°F)	
Temperature Compensation	Yes	
Protection Degree	IEC IP67	
Indication/Switch Status	Yellow (output energized)	NA
Housing Material	Polybutylene Terephthalate (PBT)	
Tightening Torque	3 Nm (2.21 lb-ft)	
Weight (connector)	124 g (4.37 oz)	
Connection	M12 (12 mm) connector	
Agency Approvals	CE, UL listed file E187310	

Wiring Diagrams

Diagram 1*


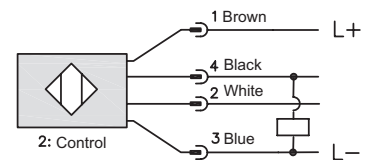


Diagram 2*

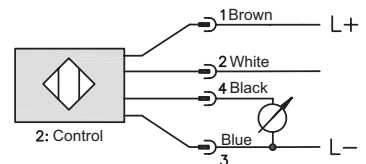

*Note: Control wire can be used to inhibit sensor or to synchronize with another sensor.


Connector

M12 connector




Must be used with 2M or 7M cable

Characteristic Curves (analog)



Detection Area



UHZ Series Ultrasonic Sensors



Measuring only 30 mm x 20 mm, these miniature sensors are specifically designed for applications with limited mounting space. Through-beam pair sensors are often the most accurate and reliable sensor configurations, but can also be the most costly when compared to traditional diffuse or retro-reflective sensors. The low price of a UHZ series through-beam pair allows it to be a competitive alternative to similarly priced but less accurate sensors.

Ultrasonic sensors (rectangular) are ideal for detecting objects in applications where the use of a normal photo-cell does not, such as:

- level measurement: for tanks containing solid or liquid
- diameter or loop detection: for materials such as paper, sheet iron, etc.
- transparent object detection: for plastic or glass bottles, plastic filters, etc.

Overview

The principle of ultrasonic sensors is based on the emission of a sound impulse and the measurement of the time elapsing of the return echo signal reflected by the detected object. The ultrasonic beam is well reflected by almost all materials (metal, wood, plastic, glass, liquid, etc.) and is not affected by colored, transparent, or shiny objects.

This allows the user to standardize on one sensor for many materials without any extra setup or sensing concerns.



Ultrasonic Through-Beam Sensors Specifications	
Specifications	UHZ
Nominal Sensing Distance	300 mm (11.81 in)
Operating Distance	NA
Output Type	PNP/NPN, NO/ NC
Operating Voltage	18 - 30 VDC
No Load Supply Current	< 40 mA
Operating (Load) Current	500 mA
Off-state (Leakage) Current	<10 µA @ 30 VDC
Voltage Drop	NA
Switching Frequency	150 Hz
Sensing Beam	Beam angle 15°
Differential Travel (% of Nominal Distance)	NA
Repeat Accuracy	NA
Ripple	NA
Time Delay Before Availability (tv)	NA
Response Time	1 ms
Reverse Polarity Protection	Yes
Short-Circuit Protection	Output short circuit and overcurrent protection, reverse polarity protection
Operating Temperature	5°F to 140°F (-15°C to +60°C)
Protection Degree	IEC-IP67
Indication/Switch Status	Yellow Output State
Case Material	PBTP
Active Head Material	Ceramic
Shock/Vibration	per IEC EN 60947-5-2
Tightening Torque	NA
Weight	161 g (5.68 oz)
Connection	2 m (6.5') axial cable
Agency Approvals	CE

UHZ Series Ultrasonic Sensors

The UHZ series of miniature ultrasonic sensors includes four models of rectangular through-beam units. These tiny 20 mm x 30 mm sensors have a maximum sensing distance of 300 mm, with no dead zone at close range. This enables object sensing at a variety of distances. All models have an LED indicator on the receiver and are IP67 protection rated.

With two pre-drilled mounting holes, the UHZ units can be surface mounted more easily than traditional 18 mm or 30 mm threaded tubular designs, which often require a separate mounting bracket or a large mounting hole and additional locknuts.


Features

- 30x20x12 mm emitter/receiver rectangular ultrasonic sensor
- LED status indicator for all models
- Complete protection against electrical damage
- IP67 protection
- Strong plastic housing
- Switching frequency 150 Hz
- Sensing distance (sn): 300mm
- Beam angle: 15°
- Supply voltage: 18 - 30 VDC
- NPN or PNP, NO or NC models
- Lifetime warranty


Rectangular Ultrasonic Through-Beam Sensors Selection Chart									
Part Number	Price	Voltage Range	Sensing Range	Switching Frequency	Sensing Beam	Thru-Beam Component	Output Type	Connection Type	Wiring
UHZ-AN-0A	\$160.00	18 - 30 VDC	11.81 in. (0.3 m)	150 Hz	ultrasonic	pair	NPN / NO	2 meter cable	Diagram 1
UHZ-AP-0A	\$160.00					pair	PNP / NO		Diagram 2
UHZ-CN-0A	\$160.00					pair	NPN / NC		Diagram 3
UHZ-CP-0A	\$160.00					pair	PNP / NC		Diagram 4

Wiring Diagram


Emitter




Receiver (NPN) Diagram 1




Receiver (PNP) Diagram 2



Receiver (NPN) Diagram 3




Receiver (PNP) Diagram 4



Dimensions

mm [inches]

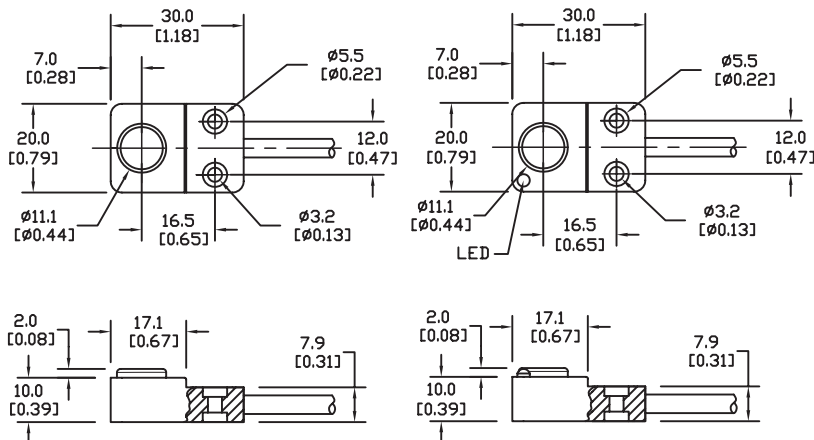


EMITTER

RECEIVER

Warning: These products are not safety sensors and are not suitable for use in personal safety applications.

IP69K-rated Proximity Sensors

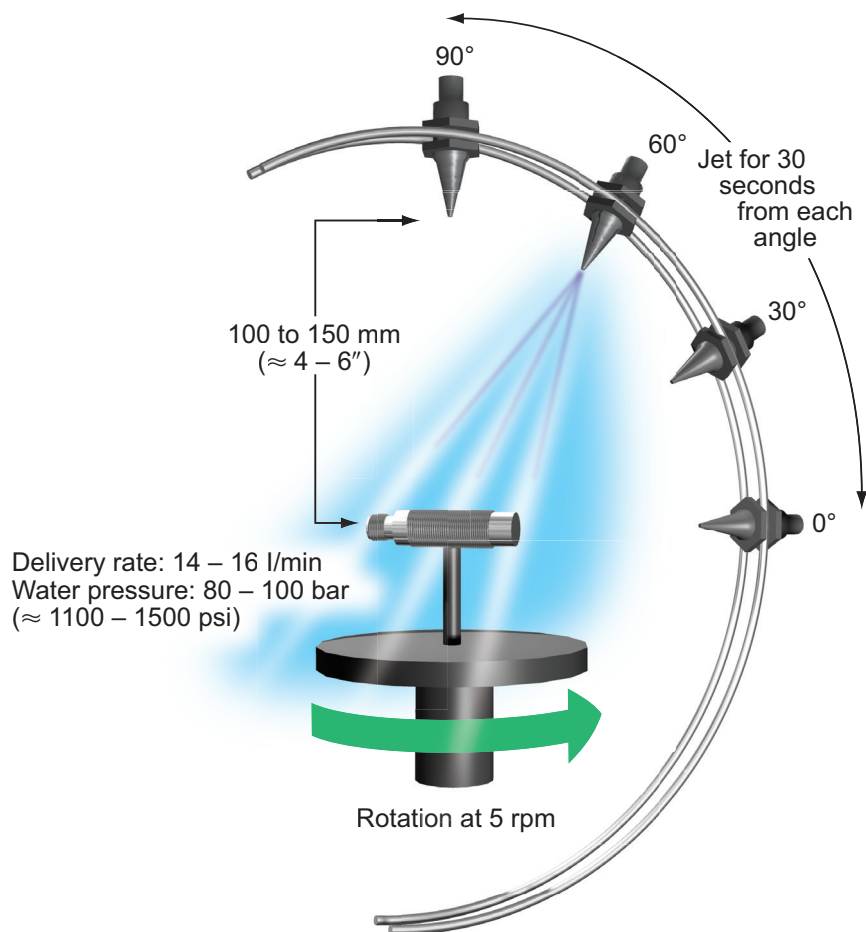

Overview

IP69K high-pressure cleaning test

The ADC Food and Beverage products were tested in accordance with the IP69K standard, according to DIN 40050 part 9. The goal of this test was to duplicate pressure cleaning conditions on a plant floor. In the test fixture, the sensors were exposed to a 1500 psi spray of water at a temperature of 176 °F. The duration of each cleaning cycle was 30 seconds. The test was performed at specified angles using a spray nozzle located at a distance of 4" from the switch. The sensors withstood test conditions and were still operable, providing 100% of sensing range.

Thermal endurance

In pressure cleaning environments, proximity and photo sensors can be exposed to extreme temperature conditions. A thermal shock test was performed on the proximity sensors by cycling the temperature to ensure their consistent high reliability. All proximity and FFRS photoeyes can withstand temperatures up to 100°C (212°F).

FDA certified Materials

The ADC Food & Beverage sensors are manufactured from materials capable of withstanding solutions used during equipment cleaning. These materials are all approved by the FDA for use in food production environments:

- 316L (V4A) stainless steel
- PMMA (acrylic)
- PEEK (Polyether Ether Ketone)
- PPS (Techtron)

Third Party chemical testing companies such as ECOLAB and Johnson Diversey have tested these products with common cleaning agents, such as P3-clint KF and P3-topax 52, to assure continued operation.

PFM Series IP69K-rated Proximity Sensors

12 mm stainless steel - DC



PFM1-BN-1H

- 10 models available
- 12 mm diameter
- 316 L stainless steel housing
- M12 quick-disconnect plug with gold-plated pins (purchase cable separately)
- Complete overload protection
- IP69K rated for food and beverage applications
- M12 mounting hex nuts included
- Lifetime warranty



PFM Series Food and Beverage DC Inductive Prox Selection Chart								
Part Number	Price	Sensing Range	Housing	Output State	Logic	Connection	Wiring	Dimensions
Standard								
PFM1-BN-1H	\$42.50	0 to 2 mm (0 to 0.08 in)	Shielded	NO/NC	NPN	M12 (12 mm) connector	Diagram 1	Figure 2
PFM1-BP-1H	\$42.50				PNP	M12 (12 mm) connector	Diagram 2	Figure 2
PFM1-BN-2H	\$42.50	0 to 4 mm (0 to 0.157 in)	Unshielded	NO/NC	NPN	M12 (12 mm) connector	Diagram 1	Figure 2
PFM1-BP-2H	\$42.50				PNP	M12 (12 mm) connector	Diagram 2	Figure 2
Extended								
PFM1-BN-3H	\$42.50	0 to 4 mm (0 to 0.157 in)	Shielded	NO/NC	NPN	M12 (12 mm) connector	Diagram 1	Figure 2
PFM1-BP-3H	\$42.50				PNP	M12 (12 mm) connector	Diagram 2	Figure 2
PFM1-AP-3H	\$35.50			NO	PNP	M12 (12 mm) connector	Diagram 3	Figure 1
PFM1-BN-4H	\$42.50	0 to 8 mm (0 to 0.315 in)	Unshielded	NO/NC	NPN	M12 (12 mm) connector	Diagram 2	Figure 2
PFM1-BP-4H	\$42.50				PNP	M12 (12 mm) connector	Diagram 2	Figure 2
PFM1-AP-4H	\$35.50	0 to 7 mm (0 to 0.275 in)		NO	PNP	M12 (12 mm) connector	Diagram 3	Figure 1

Wiring diagrams

Diagram 1





Diagram 2



Connector

M12 connector





Diagram 3



NOTE: CLASS 2 POWER SUPPLY REQUIRED

PFM Series IP69K-rated Proximity Sensors

PFM Series Specifications	Standard		Extended			
Mounting Type	Shielded	Unshielded	Shielded	Unshielded	Shielded	Unshielded
Nominal Sensing Distance	2 mm (0.08 in)	4 mm (0.157 in)	4 mm (0.157 in)	8 mm (0.315 in)	4 mm (0.157 in)	7 mm (0.275 in)
Operating Distance	NA					
Material Correction Factors	See Material Influence table #2 later in this section.					
Output Type	NPN or PNP/4-wire, NO/NC				PNP, NO only	
Operating Voltage	10 - 30 VDC				10 - 36 VDC	
No-load Supply Current	≤15 mA				≤10 mA	
Operating (Load) Current	≤200 mA				≤100 mA	
Off-state (Leakage) Current	≤10 μA				NA	
Voltage Drop	≤2.0 V				≤2.5 V	
Switching Frequency	2000 Hz				800 Hz	
Differential Travel (% of Nominal Distance)	1 - 20%				3 - 15%	
Repeat Accuracy	5%				10%	
Ripple	≤10%				NA	
Time Delay Before Availability (tv)	50 ms				30 ms	
Reverse Polarity Protection	Yes					
Short-Circuit Protection	Yes (switch auto-resets after overload is removed)					
Operating Temperature	-40° to 80°C (-40° to 176°F), Short exposure (15 minutes) to 100°C (212°F) during cleaning processes				0° to 100°C (32° to 212°F)	
Temperature Drift	≤10% Sr					
Protection Degree (DIN 40050)	IEC IP67, IP68, IP69K				IEC IP68, IP69K	
Indication/Switch Status	Normally Open output energized - Yellow					
Housing Material	316 L stainless steel					
Sensing Face Material	PPS (FDA certified)				PEEK (Polyether Ether Ketone)	
Shock/Vibration	See Terminology Section					
Tightening Torque	20 Nm (14.75 lb-ft)				20 Nm (14.75 lb-ft)	
Weight	35 g (1.23 oz)				25 g (0.88 oz)	
Connection	M12 plug with gold-plated pins					
Agency Approvals	UL file E187310, CE, ECOLAB, RoHS				UL file E328811, CE, ECOLAB, RoHS	

Dimensions

mm [inches]

Figure 1


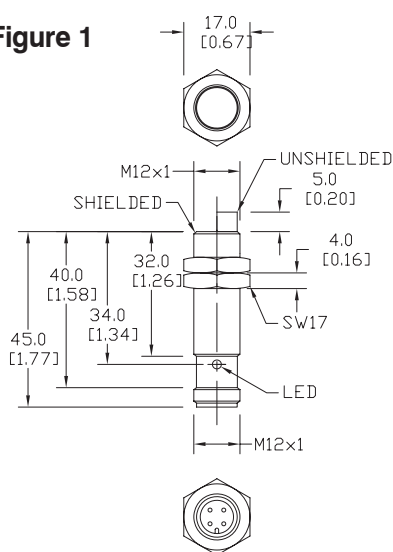


Figure 2



PFK Series IP69K-rated Proximity Sensors

18 mm stainless steel - DC

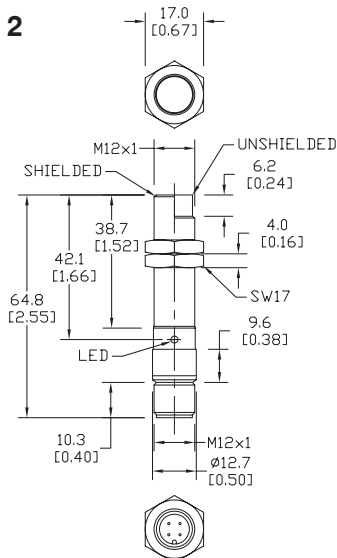

PFK1-BN-1H

- 10 models available
- 18 mm diameter
- 316 L stainless steel housing
- M12 quick-disconnect plug with gold-plated pins (purchase cable separately)
- Complete overload protection
- IP69K rated for food and beverage applications
- M18 mounting hex nuts included
- Lifetime warranty



PFK Series Food and Beverage DC Inductive Prox Selection Chart								
Part Number	Price	Sensing Range	Housing	Output State	Logic	Connection	Wiring	Dimensions
Standard								
PFK1-BN-1H	\$49.50	0 to 5 mm (0 to 0.197 in)	Shielded	NO/NC	NPN	M12 (12 mm) connector	Diagram 1	Figure 3
PFK1-BP-1H	\$49.50				PNP	M12 (12 mm) connector	Diagram 2	Figure 3
PFK1-BN-2H	\$49.50	0 to 8 mm (0 to 0.315 in)	Unshielded	NO/NC	NPN	M12 (12 mm) connector	Diagram 1	Figure 3
PFK1-BP-2H	\$49.50				PNP	M12 (12 mm) connector	Diagram 2	Figure 3
Extended								
PFK1-BN-3H	\$49.50	0 to 8 mm (0 to 0.315 in)	Shielded	NO/NC	NPN	M12 (12 mm) connector	Diagram 1	Figure 3
PFK1-BP-3H	\$49.50				PNP	M12 (12 mm) connector	Diagram 2	Figure 3
PFK1-AP-3H	\$35.50			NO	PNP	M12 (12 mm) connector	Diagram 3	Figure 1
PFK1-BN-4H	\$55.00	0 to 12 mm (0 to 0.472 in)	Unshielded	NO/NC	NPN	M12 (12 mm) connector	Diagram 1	Figure 3
PFK1-BP-4H	\$55.00				PNP	M12 (12 mm) connector	Diagram 2	Figure 3
PFK1-AP-4H	\$35.50			NO	PNP	M12 (12 mm) connector	Diagram 3	Figure 2

Wiring diagrams

Diagram 1

NPN Output





Diagram 2

PNP Output




Connector

M12 connector



Diagram 3

PNP Output






NOTE: CLASS 2 POWER SUPPLY REQUIRED

PFK Series IP69K-rated Proximity Sensors

PFK Series Specifications	Standard		Extended			
	Shielded	Unshielded	Shielded	Unshielded	Shielded	Unshielded
Mounting Type	Shielded	Unshielded	Shielded	Unshielded	Shielded	Unshielded
Nominal Sensing Distance	5 mm (0.196 in)	8 mm (0.315 in)	8 mm (0.315 in)	12 mm (0.472 in)	8 mm (0.315 in)	12 mm (0.472 in)
Operating Distance	NA					
Material Correction Factors	See Material Influence table #2 later in this section.					
Output Type	NPN or PNP/4-wire, NO/NC				PNP, NO only	
Operating Voltage	10 - 30 VDC				10 - 36 VDC	
No-load Supply Current	≤15 mA				≤10 mA	
Operating (Load) Current	≤200 mA				≤100 mA	
Off-state (Leakage) Current	≤10 µA				NA	
Voltage Drop	≤2.0 V				≤2.5 V	
Switching Frequency	1500 Hz				600 Hz	300 Hz
Differential Travel (% of Nominal Distance)	1 - 20%				3 - 15%	
Repeat Accuracy	5%				10%	
Ripple	≤10%				NA	
Time Delay Before Availability (tv)	50 ms				30 ms	
Reverse Polarity Protection	Yes					
Short-Circuit Protection	Yes (switch auto-resets after overload is removed)					
Operating Temperature	-40° to 80°C (-40° to 176°F), Short exposure (15 minutes) to 100°C (212°F) during cleaning processes				0° to 100°C (32° to 212°F)	
Protection Degree (DIN 40050)	IEC IP67, IP68, IP69K				IEC IP68, IP69K	
Indication/Switch Status	Normally Open output energized - Yellow					
Housing Material	316 L stainless steel					
Sensing Face Material	PPS (FDA certified)				PEEK (Polyether Ether Ketone)	
Shock/Vibration	See Terminology Section					
Tightening Torque	107 Nm (79 lb-ft)				50 Nm (37 lb-ft)	
Weight	35 g (1.23 oz)				45 g (1.587 oz)	
Connection	M12 plug with gold-plated pins					
Agency Approvals	UL file E187310, CE, ECOLAB, RoHS				UL file E328811, CE, ECOLAB, RoHS	

Dimensions

mm [inches]

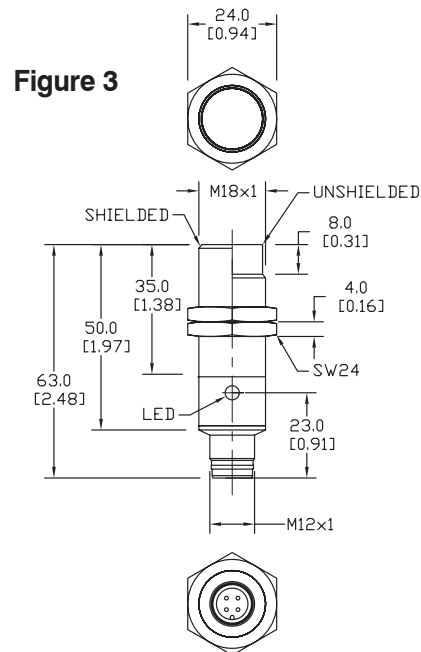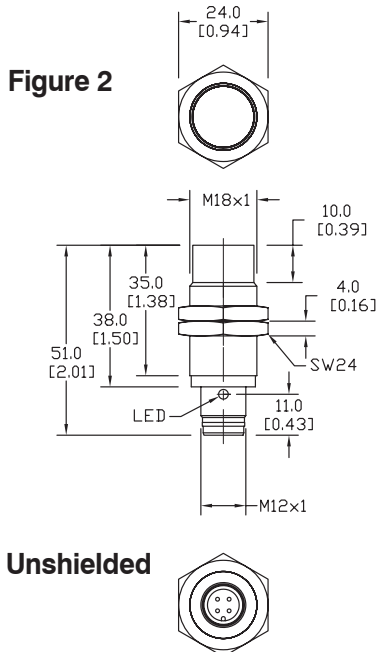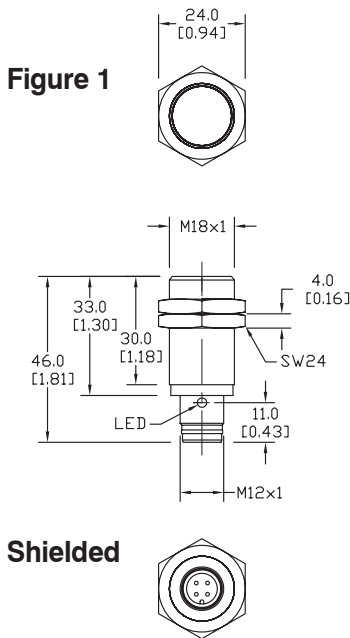

PFT Series IP69K-rated Proximity Sensors



PFT1-AP-3H
PFT1-AP-4H

30 mm stainless steel - DC


- 4 models available:
PFT1 series – short-body length,
PFT2 series – regular body length
- 30 mm diameter
- 316 L stainless steel housing
- M12 quick-disconnect plug with gold-plated pins
(purchase cable separately)
- Complete overload protection
- IP69K rated for food and beverage applications
- M30 mounting hex nuts included
- Lifetime warranty



PFT Series Food and Beverage DC Inductive Prox Selection Chart								
Part Number	Price	Sensing Range	Housing	Output State	Logic	Connection	Wiring	Dimensions
PFT1-AP-3H	\$45.50	0 to 14 mm (0 to 0.551 in)	Shielded	NO	PNP	M12 (12 mm) connector	Diagram1	Figure 1
PFT2-AP-3H	\$45.50	0 to 15 mm (0 to 0.590 in)			PNP	M12 (12 mm) connector	Diagram1	Figure 2
PFT1-AP-4H	\$45.50	0 to 22 mm (0 to 0.866 in)	Unshielded	NO	PNP	M12 (12 mm) connector	Diagram1	Figure 1
PFT2-AP-4H	\$45.50				PNP	M12 (12 mm) connector	Diagram1	Figure 2

Wiring diagram

Diagram 1



Connector





NOTE: CLASS 2 POWER SUPPLY REQUIRED

PFT Series IP69K-rated Proximity Sensors

PFT Series Specifications				
Mounting Type	Shielded		Unshielded	
	PFT1	PFT2	PFT1	PFT2
Nominal Sensing Distance	14 mm (0.551 in)	15 mm (0.590 in)	22 mm (0.866 in)	
Operating Distance	NA			
Material Correction Factors	See Material Influence table #2 later in this section.			
Output Type	PNP, NO only			
Operating Voltage	10 - 36 VDC			
No-load Supply Current	≤10 mA			
Operating (Load) Current	≤100 mA			
Off-state (Leakage) Current	NA			
Voltage Drop	≤2.5 V			
Switching Frequency	50 Hz		100 Hz	
Differential Travel (% of Nominal Distance)	3 - 15%			
Repeat Accuracy	10%			
Ripple	NA			
Time Delay Before Availability (tv)	30 ms			
Reverse Polarity Protection	Yes			
Short-Circuit Protection	Yes (switch auto-resets after overload is removed)			
Operating Temperature	0° to 100°C (32° to 212°F)			
Protection Degree (DIN 40050)	IEC IP68, IP69K			
Indication/Switch Status	Normally Open output energized - Yellow			
Housing Material	316 L stainless steel			
Sensing Face Material	PEEK (Polyether Ether Ketone)			
Shock/Vibration	See Terminology Section			
Tightening Torque	80 Nm (59 lb-ft)			
Weight	110 g (3.88 oz)	130 g (4.58 oz)	107 g (3.77 oz)	124 g (4.37 oz)
Connection	M12 plug with gold-plated pins			
Agency Approvals	UL file E328811, CE ECOLAB, RoHS			

Dimensions

mm [inches]

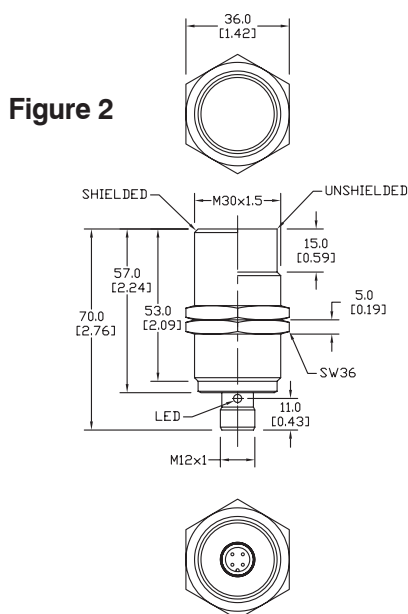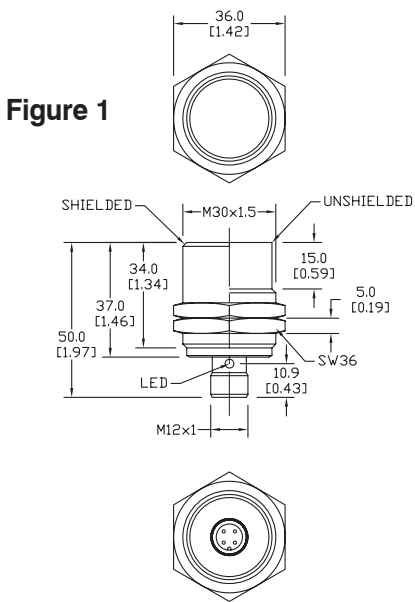

VFK Series IP69K-rated Proximity Sensors



VFK1-A0-1M
VFK1-A0-2M

18 mm stainless steel - AC


- 2 models available
- 18 mm diameter
- 316 L stainless steel housing
- 1/2" micro AC quick-disconnect plug with gold-plated pins (purchase cable separately)
- Complete overload protection
- IP69K rated for food and beverage applications
- M18 mounting hex nuts included
- Lifetime warranty



VFK Series Food and Beverage AC Inductive Prox Selection Chart							
Part Number	Price	Sensing Range	Housing	Output State	Connection	Wiring	Dimensions
VFK1-A0-1M	\$55.00	0 to 5 mm (0 to 0.197 in)	Shielded	NO	1/2" micro AC quick-disconnect plug	Diagram 1	Figure 1
VFK1-A0-2M	\$55.00	0 to 12 mm (0 to 0.472 in)	Unshielded		1/2" micro AC quick-disconnect plug	Diagram 1	Figure 1

Wiring diagram

Diagram 1



Connector



NOTE: CLASS 2 POWER SUPPLY REQUIRED


VFK Series IP69K-rated Proximity Sensors

VFK Series Specifications		
Mounting Type	Shielded	Unshielded
Nominal Sensing Distance	0 to 5 mm (0 to 0.197 in)	0 to 12 mm (0 to 0.472 in)
Operating Distance	NA	
Material Correction Factors	See Material Influence table #2 later in this section.	
Output Type	NO only	
Operating Voltage	20 to 140 VAC/VDC	
No-load Supply Current	NA	
Operating (Load) Current	5 - 200 mA	
Off-state (Leakage) Current	<1 mA	
Voltage Drop	<5.5 V	
Switching Frequency	25 Hz VAC/400 Hz VDC	25 Hz VAC/300 Hz VDC
Differential Travel (% of Nominal Distance)	1 - 20%	
Repeat Accuracy	10%	
Ripple	NA	
Time Delay Before Availability (tv)	1 s	
Reverse Polarity Protection	yes	
Short-Circuit Protection	yes (non latching)	
Operating Temperature	0° to 100°C (32° to 212°F)	
Protection Degree (DIN 40050)	IEC IP68/IP69K, II	
Indication/Switch Status	Normally Open output energized - Yellow	
Housing Material	316 L stainless steel	
Sensing Face Material	PEEK (Polyether Ether Ketone)	
Shock/Vibration	See Terminology Section	
Tightening Torque	50 Nm (37 lb-ft)	
Weight	68 g (2.39 oz)	59 g (2.08 oz)
Connection	1/2" micro AC connector	
Agency Approvals	UL E328811, CE, ECOLAB, RoHS	

Dimensions

mm [inches]

Figure 1

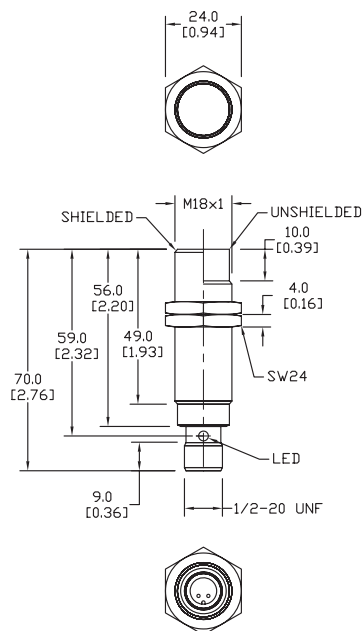

VFT Series IP69K-rated Proximity Sensors



VFT1-A0-1M
VFT1-A0-2M

30 mm stainless steel - AC


- 2 models available
- 30 mm diameter
- 316 L stainless steel housing
- 1/2" micro AC quick-disconnect plug with gold-plated pins (purchase cable separately)
- Complete overload protection
- IP69K rated for food and beverage applications
- M30 mounting hex nuts included
- Lifetime warranty



VFT Series Food and Beverage AC Inductive Prox Selection Chart							
Part Number	Price	Sensing Range	Housing	Output State	Connection	Wiring	Dimensions
VFT1-A0-1M	\$59.00	0 to 14 mm (0 to 0.551 in)	Shielded	NO	1/2" micro AC quick-disconnect plug	Diagram 1	Figure 1
VFT1-A0-2M	\$59.00	0 to 22 mm (0 to 0.866 in)	Unshielded		1/2" micro AC quick-disconnect plug	Diagram 1	Figure 1

Wiring diagram

Diagram 1



Connector



NOTE: CLASS 2 POWER SUPPLY REQUIRED


VFT Series IP69K-rated Proximity Sensors

VFT Series Specifications		
Mounting Type	Shielded	Unshielded
Nominal Sensing Distance	0 to 14 mm (0 to 0.551 in)	0 to 22 mm (0 to 0.866 in)
Operating Distance	NA	NA
Material Correction Factors	See Material Influence Table 2 later in this section.	
Output Type	NO only	
Operating Voltage	20 to 140 VAC/VDC	
No-load Supply Current	NA	
Operating (Load) Current	5 - 200 mA	
Off-state (Leakage) Current	<1 mA	
Voltage Drop	<5.5 V	
Switching Frequency	25 Hz VAC/100 Hz VDC	
Differential Travel (% of Nominal Distance)	2 - 15%	3 - 15%
Repeat Accuracy	10%	
Ripple	NA	
Time Delay Before Availability (tv)	1 s	
Reverse Polarity Protection	yes	
Short-Circuit Protection	yes (non latching)	
Operating Temperature	0° to 100°C (32° to 212°F)	
Protection Degree (DIN 40050)	IEC IP68/IP69K, II	
Indication/Switch Status	Normally Open output energized - Yellow	
Housing Material	316 L stainless steel	
Sensing Face Material	PEEK (Polyether Ether Ketone)	
Shock/Vibration	See Terminology Section	
Tightening Torque	80 Nm (59 lb-ft)	
Weight	149 g (5.25 oz)	142 g (5.01 oz)
Connection	1/2" micro AC connector	
Agency Approvals	UL E328811, CE, ECOLAB, RoHS	

Dimensions

mm [inches]

Figure 1

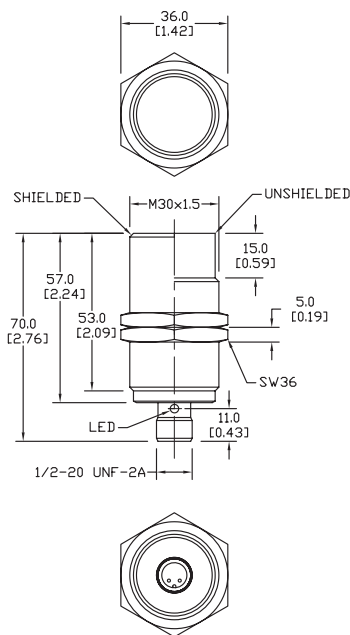

#1 Voted Service

We do not charge for technical support . . . Period.

Rated #1 in Technical Support for 14 Years Straight...and It's FREE!

Are you tired of calling a local distributor to discover their "product expert" is not in? How about waiting hours for technical service to return a message? Or paying for phone support service only to be placed on hold when you try to use it?

It's no accident that our Tech Team routinely demonstrates the best attitude and manners in the industry!

We send our customers surveys to score our attitude, accuracy and timeliness then take these scores and use them as part of the Tech team's report card. The bottom line is that you get great service by design.

Over 85% of customers who have used our service and responded to surveys say it's better than what they have been getting from other automation suppliers. 91% say we are above average to excellent in accuracy, 90% say we are above average to excellent in thoroughness, 91% say we are above average in response time, and 96% rate us above average in courtesy. Isn't it great to get better service AND a better price?



**VOTED #1
Best in SERVICE
14 YEARS**
2001 - 2014

OEMs voted our name 14 years in a row!

The Reader's Choice survey hosted by Control Design magazine aims to identify the best products and service in the industry. Results from 2001-2014 indicate we consistently provide top-notch support to our customers. This is in addition to several other industry awards from independent publications.

Thanks to all who voted, we'll continue to put customer satisfaction as our #1 priority.

Don't forget our tech support site is loaded with tons of information that is readily available 24/7.

FAQs, software, manuals, technical and application notes, videos, wiring diagrams, example programs, CAD drawings, cross reference guides, compliance documents . . . and more

www.AutomationDirect.com/support

Want to watch some videos to learn more about our products?

<http://www.AutomationDirect.com/videos>


www.youtube.com/automationdirect

Is where we have hundreds of helpful videos posted, from new product overviews to detailed tutorials on topics such as PID and motion control

- "As always, your service is stellar and your staff is very friendly and great to work with. Wish the rest of my vendors were as good to work with as AutomationDirect."
- "Your tech support is really excellent - the folks there are very knowledgeable and very willing to help. Please tell them they are doing a way better than average job."
- "You all are the greatest! And that gets reinforced each time I have to call any other vendor for technical support."
- "Very good technical support; much, much better than the distributor with whom we have previously worked."
- "Tech was outstanding, great advice on drives and also helped lower the cost of the system. You are my first choice for Automation and Power Transmission products. Keep up the great work."
- "Your presales (tech) folks helped me find the right parts the first time - terrific!"

YOU SAY -

M Series Magnetic Proximity Sensors

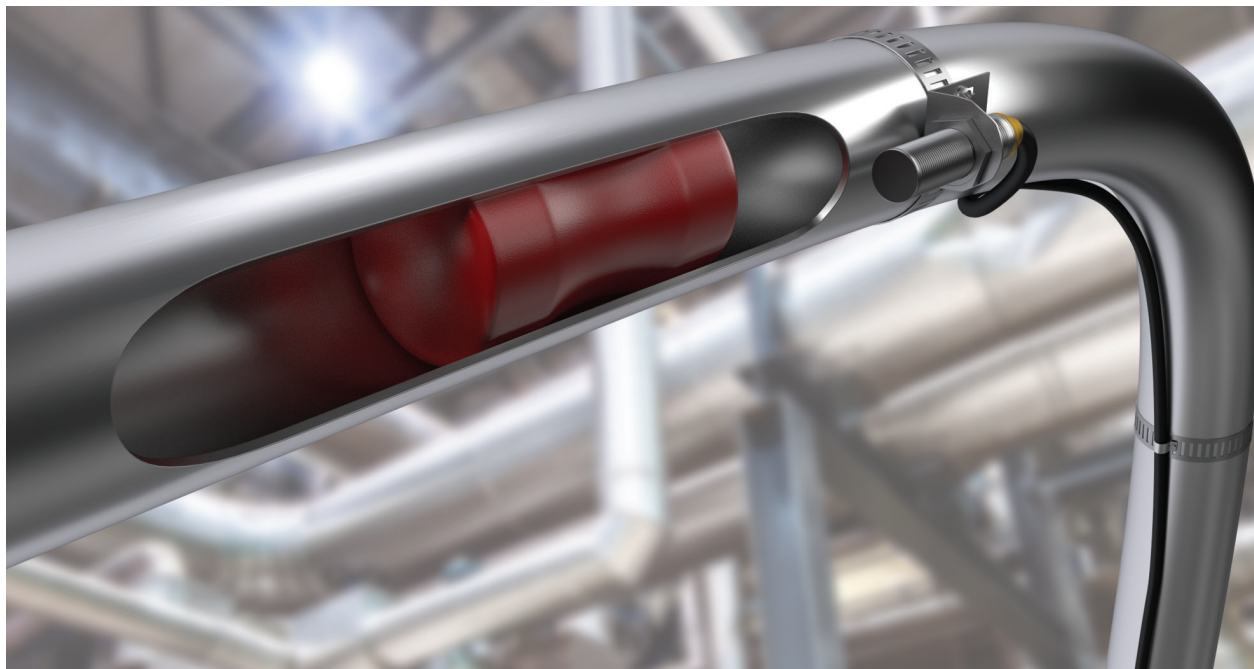

Overview

Magnetic proximity sensors are used for non-contact position detection beyond the normal limits of inductive sensors. In conjunction with a separate “damping” magnet, magnetic sensors offer very long sensing ranges from a small package size. Depending on the orientation of the magnetic field the sensor can be damped from the front or from the side.

Since magnetic fields penetrate all non-magnetisable materials, these sensors can detect magnets through walls made of non-ferrous metal, stainless steel, aluminium, plastic or wood.

In the food industry the magnetic sensor is often used in connection with a “pig” (cleaning devices which pass through the inside of pipes). These magnetic proximity sensors can detect the exact position of the pig from outside the wall of the stainless steel pipe.

Many clean in place (CIP) systems use magnetic proxies at a “diverter panel” to detect the position of a U-tube through a stainless steel faceplate.

Features:

- Detection through plastic, wood, and any non-magnetisable metals
- Small housings with very long sensing ranges up to 70 mm
- Cylinder and rectangular designs satisfy space-dependent applications
- High mechanical stability in case of shock or vibration
- Flush or non-flush installation in non-magnetisable metals

Operating Principle

Magnetic sensors use GMR (Giant Magneto Resistive Effect) technology. The measuring cell consists of resistors with several extremely fine, ferromagnetic and non-magnetic layers. Two of these GMR resistors are used to form a conventional Wheatstone bridge circuit which produces a large signal proportional to the magnetic field when a magnetic field is present. A threshold value is defined and an output signal is switched via a comparator.



M Series Cylindrical Magnetic Proximity Sensors

8mm, 12mm and 18mm stainless steel - DC



- 10 models available
- 8mm, 12mm, or 18mm diameter
- 316L stainless steel and polybutylene terephthalate housing
- Complete overload protection
- IP65/IP67 or IP68/IP69K rated
- M8 or M12 quick-disconnect, as applicable. Mounting hex nuts included
- Lifetime warranty



M Series Magnetic DC Prox Selection Chart								
Part Number	Price	Sensing Range	Housing	Output State	Logic	Connection	Wiring	Dimensions
8 mm Diameter								
MAE-AP-1F	\$49.00	0 to 60 mm (0 to 2.362 in)	Shielded	NO	PNP	M8 connector	Diagram 4	Figure 1
MAE-AP-1A	\$49.00					2m cable	Diagram 2	Figure 2
12 mm Diameter								
MAFM1-A0-1H	\$44.50	0 to 60 mm (0 to 2.362 in)	Shielded	NO	PNP	M12 connector	Diagram 4	Figure 3
MMW-AP-1H	\$51.00				NPN		Diagram 3	
MMW-AN-1H	\$51.00				NC		Diagram 4	
MMW-CP-1H	\$51.00							
18 mm Diameter								
MAFK1-A0-1H	\$49.50	0 to 70 mm (0 to 2.756 in)	Shielded	NO	PNP	M12 connector	Diagram 4	Figure 4
MKW-AP-1H	\$54.00				NPN		Diagram 4	
MKW-AN-1H	\$54.00				NC		Diagram 3	
MKW-CP-1H	\$54.00						Diagram 4	

Wiring diagram

Diagram 1



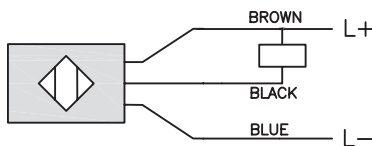


Diagram 2



Connectors

M8 connector



M12 connector



Diagram 3


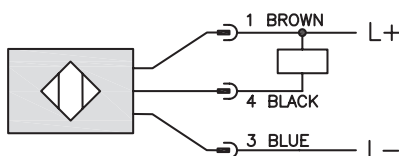


Diagram 4

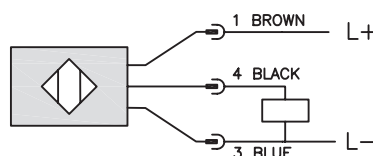

NOTE: CLASS 2 POWER SUPPLY REQUIRED


M Series Cylindrical Magnetic Proximity Sensors

M Series Specifications					
Series	MAE	MAFM	MMW	MAFK	MKW
Mounting Type	Shielded				
Nominal Sensing Distance*	0 to 60 mm (0 to 2.362 in)			0 to 70 mm (0 to 2.756 in)	
Operating Distance	NA				
Material Correction Factors	NA				
Output Type	PNP, NO only	PNP, NO only	PNP/NPN NO, NC	PNP, NO only	PNP/NPN NO, NC
Operating Voltage	10 to 30 VDC				
No-load Supply Current	<10 mA				
Operating (Load) Current	200 mA				
Off-state (Leakage) Current	NA				
Voltage Drop	<2.5 V				
Switching Frequency	5000 Hz VDC				
Differential Travel (% of Nominal Distance)	1 to 10%				
Repeat Accuracy	10%				
Ripple	NA				
Time Delay Before Availability (tv)	10s				
Reverse Polarity Protection	Yes				
Short-Circuit Protection	Yes (non latching)				
Operating Temperature	-25° to 75°C (13° to 167°F)	0° to 100°C (32° to 212°F)	-25° to 75°C (13° to 167°F)	0° to 100°C (32° to 212°F)	-25° to 75°C (13° to 167°F)
Protection Degree (DIN 40050)	IEC IP67 III	IEC IP68/IP69K, II	IEC IP65/IP67 III	IEC IP68/IP69K, II	IEC IP65/IP67 III
Indication/Switch Status	Normally Open output energized - Yellow				
Housing Material	316L stainless steel				
Sensing Face Material	PBT (Polybutylene Terephthalate)	PEEK (Polyether Ether Ketone)	Stainless steel 316L	PEEK (Polyether Ether Ketone)	Stainless steel 316L
Shock/Vibration	See Terminology Section				
Tightening Torque	3.5 Nm (2.58 lb-ft)	20 Nm (14.75 lb-ft)	10 Nm (7.38 lb-ft)	50 Nm (37 lb-ft)	35 Nm (25.81 lb-ft)
Weight	69g (2.4 oz) cable 27g (0.95 oz) connector	33 g (1.16 oz)	29g (1.02 oz)	54 g (1.90 oz)	49g (1.73 oz)
Connection	M8 connector or 2m cable		M12 connector		
Agency Approvals	cULus E32881, CE				

Note: To obtain the most current agency approval information, see the Agency Approval Checklist section on the specific part number's web page.

*Sensing distances are based on MAG-4 magnet.

Note: Purchase magnets separately (see listing for compatible magnets later in this section).



Sensing distances are based on the Mag-4 magnet with North facing the sensor. The sensor will work fine with South facing also, but ranges vary.

M Series Cylindrical Magnetic Proximity Sensors

Dimensions

mm [inches]

Figure 1

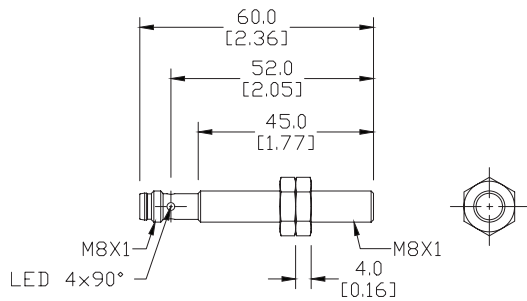


Figure 2

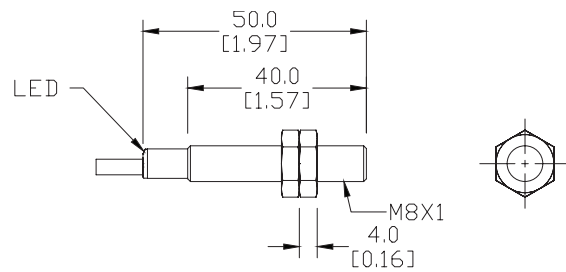


Figure 3


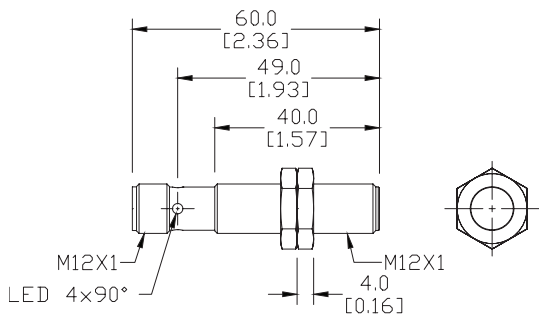


Figure 4



SEE OUR WEBSITE: WWW.AUTOMATIONDIRECT.COM FOR COMPLETE ENGINEERING DRAWINGS.

M Series Rectangular Magnetic Proximity Sensors

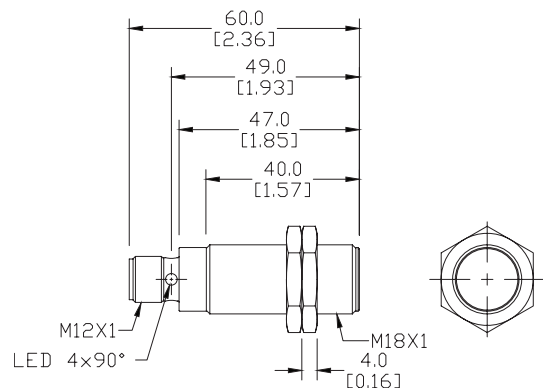

Rectangular DC

- 2 models available
- Rectangular units
- Polybutylene terephthalate housing
- M8 quick-disconnect or 2m cable
- Complete overload protection
- Lifetime warranty



M Series Magnetic DC Prox Selection Chart								
Part Number	Price	Sensing Range	Housing	Output State	Logic	Connection	Wiring	Dimensions
MDR-AP-1F	\$40.00	0 to 60 mm (0 to 2.362 in)	Shielded	NO	PNP	M8 connector	Diagram 4	Figure 1
MDR-AP-1A	\$40.00	0 to 60 mm (0 to 2.362 in)	Shielded			2m cable	Diagram 2	Figure 2

Wiring diagram

Diagram 1


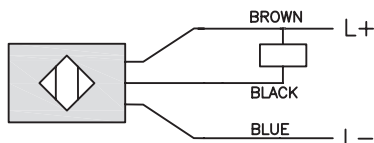


Diagram 2



Connectors



Diagram 3


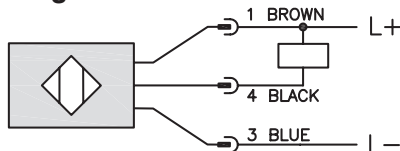


Diagram 4

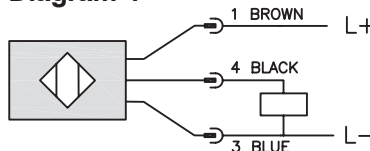

NOTE: CLASS 2 POWER SUPPLY REQUIRED

Dimensions

mm [inches]

Figure 1


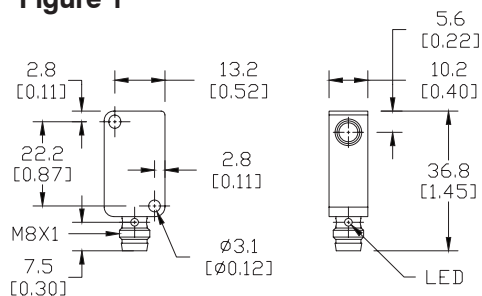


Figure 2

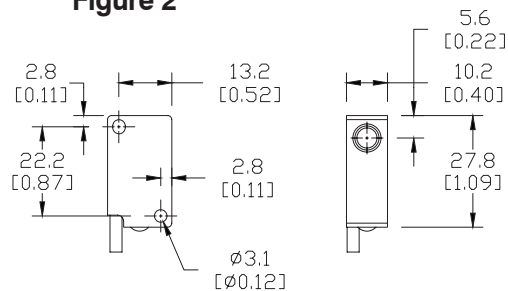

SEE OUR WEBSITE: WWW.AUTOMATIONDIRECT.COM FOR COMPLETE ENGINEERING DRAWINGS.


M Series Rectangular Magnetic Proximity Sensors

MDR Series Specifications	
Series	MDR
Mounting Type	Shielded
Nominal Sensing Distance*	0 to 60 mm (0 to 2.362 in)
Operating Distance	NA
Material Correction Factors	NA
Output Type	PNP, NO only
Operating Voltage	10 to 30 VDC
No-load Supply Current	<10 mA
Operating (Load) Current	200 mA
Off-state (Leakage) Current	NA
Voltage Drop	<2.5 V
Switching Frequency	5000 Hz VDC
Differential Travel (% of Nominal Distance)	1 to 10%
Repeat Accuracy	10%
Ripple	NA
Time Delay Before Availability (tv)	1 s
Reverse Polarity Protection	yes
Short-Circuit Protection	yes (non latching)
Operating Temperature	-25° to 75°C (13° to 167°F)
Protection Degree (DIN 40050)	IEC IP67
Indication/Switch Status	Yellow (Output energized)
Housing Material	PBT (Polybutylene terephthalate)
Sensing Face Material	PBT (Polybutylene terephthalate)
Shock/Vibration	See Terminology Section
Tightening Torque	NA
Weight	Cable: 60g (2.12 oz); M8: 17g (0.6 oz)
Connection	M8 connector or 2m cable
Agency Approvals	cULus E32881, CE

Note: To obtain the most current agency approval information, see the Agency Approval Checklist section on the specific part number's web page.

*Sensing distances are based on MAG-4 magnet.

Note: Purchase magnets separately (see listing for compatible magnets later in this section).



Sensing distances are based on the Mag-4 magnet with North facing the sensor. The sensor will work fine with South facing also, but ranges vary.

Proximity Sensor Damping Magnets



Magnet

- Damping magnet for use with magnet series sensors
- Barium ferrite and Samarium

Damping Magnet		
AW-MAG	\$35.50	Figure 1
AW-MAG-3	\$32.00	Figure 2
MAG-1	\$4.00	Figure 3
MAG-3	\$4.00	Figure 4
MAG-4	\$4.00	Figure 5
MAG-5	\$6.00	Figure 6

AW-MAG Damping Magnet Specifications						
	AW-MAG	AW-MAG-3	MAG-1	MAG-3	MAG-4	MAG-5
Ambient Temperature	-13 to 266°F (-25 to 130°C)	-13 to 266°F (-25 to 130°C)	-58 to 392°F (-50 to 200°C)		-13 to 392°F (-25 to 200°C)	
Housing Materials	Barium ferrite, samarium	Barium Ferrite	Samarium Cobalt		Barium Ferrite	
Coating	Stainless steel (1.4571/316Ti)			-	-	-
Magnetic Field Strength	48 mT	45 mT	136 mT	95 mT	103 mT	115 mT
Weight	82g (2.89 oz)	22g (0.78 oz)	4g (0.14 oz)	11g (0.39 oz)	35g (1.23 oz)	56g (1.98 oz)

Dimensions

mm [inches]

Figure 1

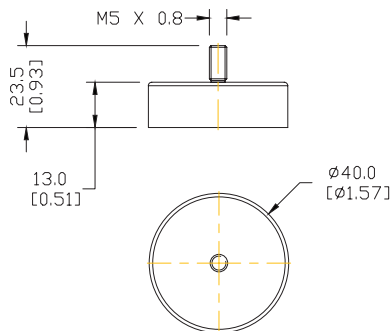


Figure 2

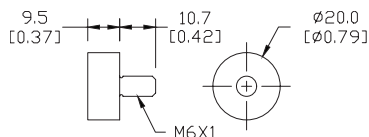


Figure 3




Figure 4




Figure 5


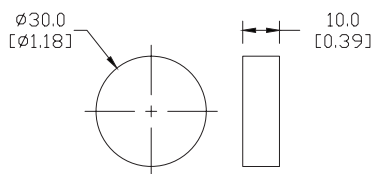


Figure 6

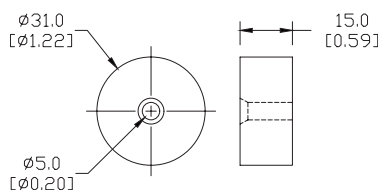

SEE OUR WEBSITE: WWW.AUTOMATIONDIRECT.COM FOR COMPLETE ENGINEERING DRAWINGS.

Accessories: Adapter, Mounting Brackets

ST08A axial bracket

Angular mounting bracket for M8 (8 mm) sensors. Has two mounting holes (use 5 mm screws) and allows the rotation of an optical axis for axial sensors. Hexagonal nuts not included.



ST08C right-angle bracket

Mounting M8 (8 mm) sensors. Has two mounting holes (use 5 mm screws) and allows the rotation of an optical axis for right-beam-angle adapter sensors. Hexagonal nuts not included.





Brackets		
Part Number	Price	Description
ST08A	\$1.00	Zinc-plated steel mounting bracket for M8 sensors axial 1/pk.

Brackets		
Part Number	Price	Description
ST08C	\$1.00	Zinc-plated steel mounting bracket for M8 sensors right angle. 1/pk

All Dimensions

mm [inches]

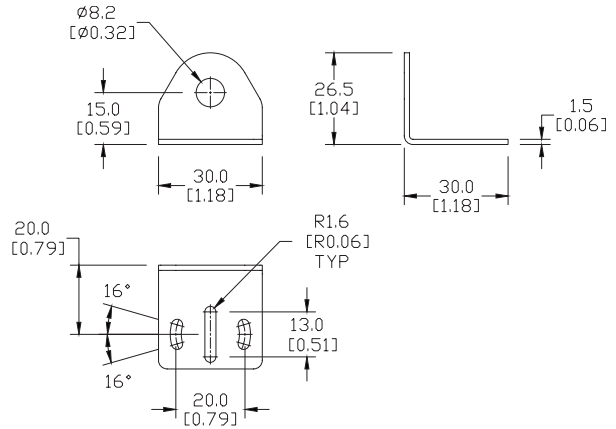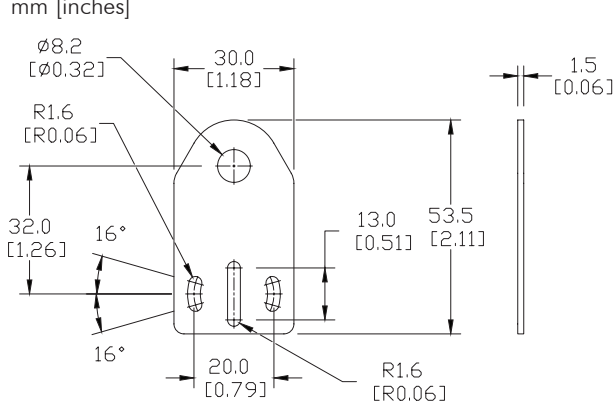

ST12A axial bracket

For mounting M12 (12 mm) sensors. Has two mounting holes (use 3 mm screws) and allows the rotation of an optical axis for right-beam angle adapter sensors. Hexagonal nuts not included.



ST12C right-angle bracket

Angular mounting bracket for use with M12 (12 mm) sensors. Has two mounting holes (use 3 mm screws) and allows the rotation of an optical axis for axial sensors. Hexagonal nuts not included.





Brackets		
Part Number	Price	Description
ST12A	\$2.00	Zinc-plated iron axial bracket for 12 mm sensors, 1/pk
ST12A7W	\$6.00	316 L stainless steel axial bracket for 12 mm sensors, 1/pk

Brackets		
Part Number	Price	Description
ST12C	\$2.00	Zinc-plated iron right angle bracket for 12 mm sensors, 1/pk
ST12C7W	\$6.00	316 L stainless steel right angle bracket for 12 mm sensors, 1/pk

All Dimensions

mm [inches]

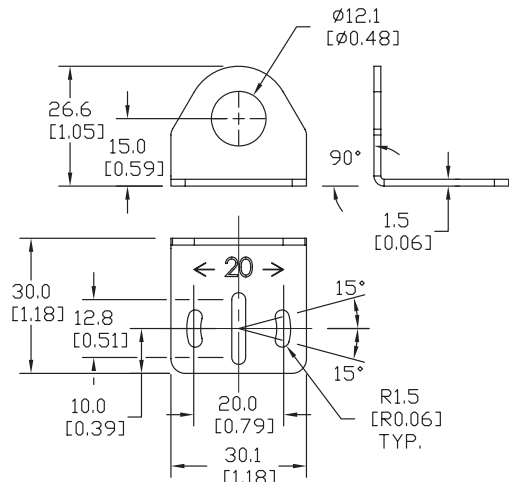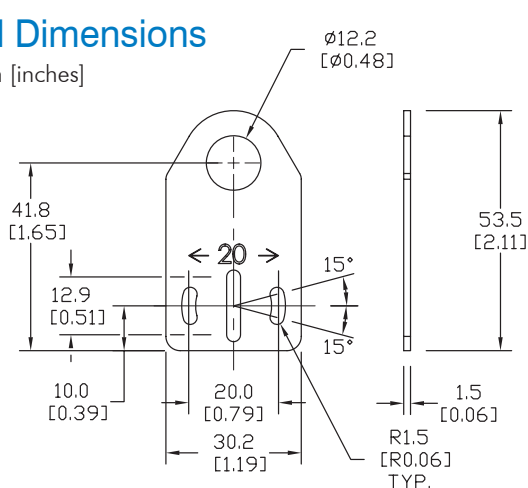

SEE OUR WEBSITE: WWW.AUTOMATIONDIRECT.COM FOR COMPLETE ENGINEERING DRAWINGS.

Accessories: Mounting Brackets

ST18A axial bracket

Mounting bracket for M18 (18 mm) sensors. Has two mounting holes (use 4 mm screws) and allows the rotation of an optical axis for right-beam-angle-adaptor sensors. Hexagonal nuts not included.



ST18C right-angle bracket



Angular mounting bracket for M18 (18 mm) sensors. Has two mounting holes (use 4 mm screws) and allows the rotation of an optical axis for axial sensors. Hexagonal nuts not included.



Brackets		
Part Number	Price	Description
ST18A	\$1.25	Zinc plated iron axial bracket for 18 mm sensors, 1/pk
ST18A7W	\$6.00	316 L stainless steel axial bracket for 18 mm sensors, 1/pk

Brackets		
Part Number	Price	Description
ST18C	\$1.25	Zinc plated iron right angle bracket for 18 mm sensors, 1/pk
ST18C7W	\$6.00	316 L stainless steel right angle bracket for 18 mm sensors, 1/pk

All Dimensions

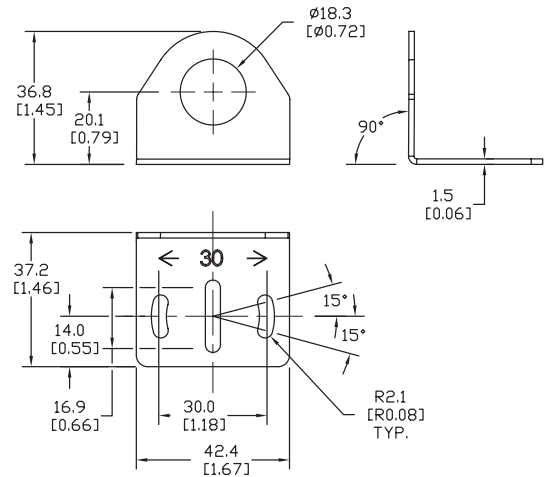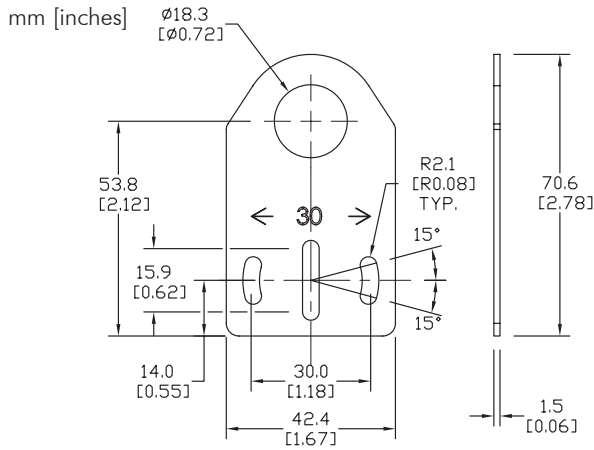

ST30A axial bracket

Mounting M30 (30 mm) sensors. Has two mounting holes (use 5 mm screws) and allows the rotation of an optical axis for right-beam-angle-adaptor sensors. Hexagonal nuts not included.



ST30C right-angle bracket



Angular mounting bracket for M30 (30 mm) sensors. Has two mounting holes (use 5 mm screws) and allows the rotation of an optical axis for axial sensors. Hexagonal nuts not included.



Brackets		
Part Number	Price	Description
ST30A	\$2.25	Zinc plated iron axial bracket for 30 mm sensors, 1/pk

Brackets		
Part Number	Price	Description
ST30C	\$2.25	Zinc plated iron right angle bracket for 30 mm sensors, 1/pk

All Dimensions

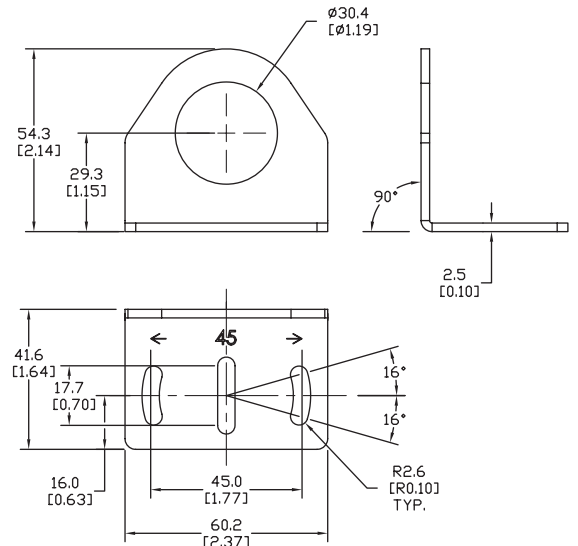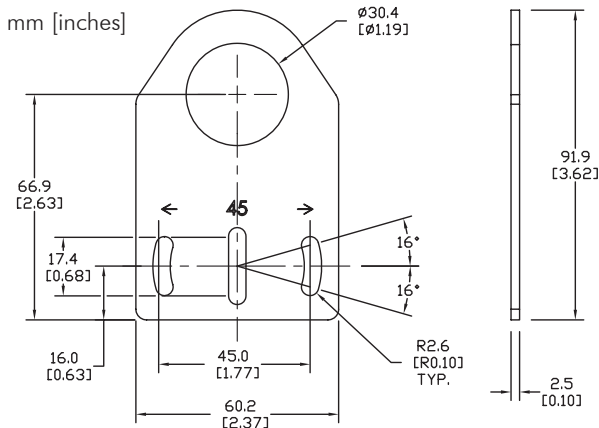


Proximity Sensor Terminology

The following descriptions refer to the European standard EN 60947-5-2. of 2007.

The specifications given here are intended to be minimum performance values described by the standard.

Alignment

Proximity switches must not be mutually influenced. For this reason, a minimum distance between them (referred to as alignment) must be provided.



Size D	Embeddable A (mm)	Non-Embeddable A (mm)
Ø3	0	--
M4	0	--
Ø4	0	--
M5	0	--
5X5	0	--
M8	2 / 3*	8
8X8	2 / 3*	--
M12	6 / 10*	12
M18	12 / 20*	30
M30	30	60

*Extended distance models

Break function (NC, normally closed)

A break function causes load current to flow only when a target is not detected.

Protection degree

If not otherwise specified, proximity switches (when installed in accordance with manufacturer's instructions) have minimum IP65 protection against dust and water jets.

Differential travel (Hysteresis)


The differential travel is given as a percentage of the nominal sensing distance (Sn) and is the maximum difference between the switching distances. The differential is intentionally introduced to guarantee the stability of the output state in case the target is positioned near the switching points.

Electrical connections

Keep sensor cables and power cables separated to avoid electrical interference.

The power supply voltage must not exceed the specified limits Ub.

If a non-stabilized supply voltage is used for DC sensors, the maximum voltage peak under minimum power consumption conditions and minimum voltage peak under maximum power consumption must not exceed Ub limits.

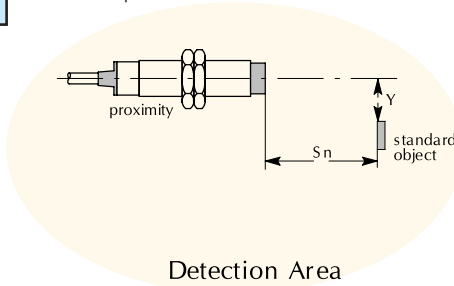

If the power supply of the sensor is also used to switch inductive loads, a suppression device must be provided. A fuse to protect the power supply line is also recommended.

Installation notes

Select a sensor compatible with the operating environment: verify the compatibility between building materials, the presence of chemicals, temperature range, protection degree, vibrations, shocks, EMC, supply voltage available, load type, etc.

Select the sensor by referring to the size and type of material to be detected.

Check the minimum distances between sensor and damping materials or another sensor.

Check that the number of operations does not exceed the maximum switching frequency. If the phase of the output signal is important, check the turn on and turn off time.

Metallic chips or dust must not accumulate on the sensing face. The distance between the sensor and the object to detect must not exceed the assured operating distance Sa; the best sensing range is Sn/2.

Check the effect of vibrations.

Install the sensor using the installation accessories and do not exceed the maximum tightening torque.

Indication/switch status

Proximity switches may incorporate one or more color indicators. The meaning of the colors vary by part. Please see part specifications for meaning.

Make function (NO, normally open)

A make function causes load current to flow only when a target is detected.

Proximity Sensor Terminology

Material influence

The nominal sensing distance (Sn) is defined using precisely defined measuring conditions (See Operating Distance.) Other conditions may result in a reduction of the operating distance. The table below shows the influence different target materials have on the operating distances of the sensors.

Material Influence					
Sensor Series	Target Material Value				
	Steel	Copper	Aluminum	Brass	Stainless Steel
AC1-**-1*	1.00	0.28	0.21	0.32	0.63
AC1-**-3*	1.00	0.29	0.23	0.31	0.66
AE*-A*-1*	1.00	0.29	0.38	0.49	0.78
AE*-A*-2*	1.00	0.43	0.51	0.59	0.83
AE*-A*-3*	1.00	0.35	0.43	0.52	0.78
AE*-A*-4*	1.00	0.47	0.52	0.58	0.79
AE*-A*-5*	1.00	0.27	0.33	0.41	0.72
AE9-10-1*	1.00	0.25	0.28	0.40	0.68
AES-**-1*	1.00	0.15	0.10	0.15	0.55
AES-**-3*	1.00	0.15	0.15	0.21	0.56
AHS-**-1*	1.00	0.10	0.05	0.13	0.54
AHS-**-3*	1.00	0.05	0.05	0.10	0.50
AK1-A*-1*	1.00	0.40	0.48	0.72	0.86
AK1-A*-2*	1.00	0.45	0.53	0.56	0.77
AK1-A*-3*	1.00	0.40	0.45	0.50	0.75
AK1-A*-4*	1.00	0.45	0.53	0.56	0.77
AK9-**-1*	1.00	0.15	0.18	0.28	0.60
AM*-A*-1*	1.00	0.22	0.31	0.41	0.77
AM*-A*-2*	1.00	0.41	0.47	0.56	0.86
AM*-A*-3*	1.00	0.33	0.40	0.50	0.82
AM*-A*-4*	1.00	0.41	0.46	0.52	0.71
AM1-A0-1*	1.00	0.30	0.35	0.50	0.80
AM1-A0-2*	1.00	0.52	0.57	0.62	0.87
AM1-A0-3*	1.00	0.42	0.47	0.55	0.80
AM1-A0-4*	1.00	0.51	0.56	0.62	0.78
AM*/*0-5H	1.00	0.25	0.30	0.40	0.70
AM9-**-1*	1.00	0.20	0.28	0.35	0.47
APS4-12*-E*-D	1.00	0.35	0.45	0.55	0.70
APS25-8*-E-D	1.00	0.40	0.50	0.50	0.75
AT1-A*-1*	1.00	0.35	0.45	0.50	0.75
AT1-A*-2*	1.00	0.45	0.50	0.55	0.80
AT1-A*-3*	1.00	0.35	0.45	0.50	0.70
AT1-A*-4*	1.00	0.45	0.50	0.55	0.75
AT9-**-1*	1.00	0.17	0.20	0.30	0.65
CR5-A*-**	1.00	0.60	0.60	0.70	0.85
CR8-A*-1*	1.00	0.40	0.45	0.55	0.80
CR8-A*-2*	1.00	0.45	0.50	0.60	0.80
CR8-A*-3*	1.00	0.27	0.36	0.45	0.77
DR10-A*-1*	1.00	0.25	0.28	0.37	0.63
DR10-A*-2*	1.00	0.41	0.50	0.55	0.75
DW-A*-62*-03-96*	1.00	0.45	0.50	0.60	0.80
DW-A*-62*-03	1.00	0.45	0.50	0.60	0.80

Proximity Sensor Terminology

Material influence

The nominal sensing distance (Sn) is defined using precisely defined measuring conditions (See Operating Distance.) Other conditions may result in a reduction of the operating distance. The table below shows the influence different target materials have on the operating distances of the sensors.

Material Influence					
Sensor Series	Target Material Value				
	Steel	Copper	Aluminum	Brass	Stainless Steel
DW-A*-62*-M4-96*	1.00	0.45	0.50	0.60	0.80
DW-A*-62*-M4	1.00	0.45	0.50	0.60	0.80
DW-A*-50*-04	1.00	0.25	0.28	0.36	0.60
DW-A*-50*-M5	1.00	0.30	0.33	0.42	0.67
DW-A*-50*-M8-001	1.00	0.27	0.33	0.41	0.72
DW-A*-50*-M8	1.00	0.27	0.33	0.41	0.72
DW-A*-51*-M8	1.00	0.44	0.47	0.55	0.77
DW-A*-51*-M8-001	1.00	0.44	0.47	0.55	0.77
DW-A*-50*-M12	1.00	0.25	0.30	0.40	0.70
DW-A*-50*-M18	1.00	0.26	0.30	0.40	0.67
DW-A*-50*-M18-002	1.00	0.26	0.30	0.40	0.67
DW-A*-51*-M18	1.00	0.42	0.44	0.50	0.69
DW-A*-51*-M18-002	1.00	0.42	0.44	0.50	0.69
DW-A*-50*-M30	1.00	0.35	0.40	0.45	0.66
DW-A*-50*-M30-002	1.00	0.35	0.40	0.45	0.66
DW-A*-51*-M30	1.00	0.37	0.42	0.47	0.78
DW-A*-51*-M30-002	1.00	0.37	0.42	0.47	0.78
DW-A*-71*-M8	1.00	0.85	1.00	1.40	0.90
DW-A*-71*-M8-001	1.00	0.85	1.00	1.40	0.90
DW-A*-71*-M12	1.00	0.80	1.00	1.40	0.65
DW-A*-71*-M18-002	1.00	0.90	1.00	1.35	0.70
DW-A*-71*-M18	1.00	0.90	1.00	1.35	0.70
DW-A*-71*-M18-002	1.00	0.90	1.00	1.35	0.70
DW-A*-71*-M30	1.00	0.90	1.00	1.20	0.25
DW-A*-71*-M30-002	1.00	0.90	1.00	1.20	0.25
DW-A*-70*-C23	1.00	0.80	1.00	1.20	0.85
DW-A*-70*-C23-276	1.00	0.80	1.00	1.20	0.85
LF40-**-*H	1.00	0.30	0.40	0.40	0.70
PBK-A*-*H	1.00	0.00	0.10	0.20	0.50
PBM-A*-*H	1.00	0.10	0.30	0.30	0.60
PBT-A*-*H	1.00	0.30	0.40	0.40	0.70
PD1-A*-1*	1.00	0.45	0.50	0.55	0.80
PD1-A*-3*	1.00	0.40	0.40	0.50	0.75
PEW-A*-1*	1.00	0.30	0.40	0.50	0.70
PFK1-B*-1H	1.00	0.25	0.35	0.40	0.70
PFK1-B*-2H	1.00	0.27	0.35	0.42	0.70
PFK1-**-3H	1.00	0.20	0.30	0.40	0.65
PFK1-**-4H	1.00	0.30	0.38	0.42	0.65
PFM1-B*-1H	1.00	0.25	0.30	0.40	0.75
PFM1-B*-2H	1.00	0.33	0.40	0.50	0.80
PFM1-**-3H	1.00	0.30	0.35	0.40	0.75
PFM1-**-4H	1.00	0.33	0.40	0.45	0.75

Proximity Sensor Terminology

Material influence

The nominal sensing distance (Sn) is defined using precisely defined measuring conditions (See Operating Distance.) Other conditions may result in a reduction of the operating distance. The table below shows the influence different target materials have on the operating distances of the sensors.


Material Influence					
Sensor Series	Target Material Value				
	Steel	Copper	Aluminum	Brass	Stainless Steel
<i>PFT1*-AP-*H</i>	1.00	0.30	0.40	0.40	0.70
<i>PKW-**-1H</i>	1.00	0.12	0.20	0.26	0.62
<i>PKW-**-2H</i>	1.00	0.30	0.37	0.46	0.78
<i>PKW-A*-5*</i>	1.00	0.80	1.00	1.20	0.50
<i>PKW-A*-5* (if Embedded)</i>	0.75	-	0.90	0.75	0.80
<i>PMW-**-1H</i>	1.00	0.02	0.08	0.20	0.68
<i>PMW-**-2H</i>	1.00	0.34	0.41	0.51	0.88
<i>PMW-A*-5*</i>	1.00	0.85	1.00	1.30	0.50
<i>PMW-A*-5* (if Embedded)</i>	0.70	-	1.15	1.05	0.80
<i>PNM SERIES</i>	1.00	0.30	0.40	0.50	0.70
<i>PNM6 SERIES</i>	1.00	0.30	0.40	0.50	0.70
<i>PNK SERIES</i>	1.00	0.30	0.40	0.50	0.70
<i>PNK6 SERIES</i>	1.00	0.30	0.40	0.50	0.70
<i>PNT SERIES</i>	1.00	0.30	0.40	0.50	0.70
<i>PNT6 SERIES</i>	1.00	0.30	0.40	0.50	0.70
<i>PTW-A*-**</i>	1.00	0.30	0.40	0.40	0.70
<i>PY3-A*-1A</i>	1.00	0.50	0.55	0.65	0.80
<i>PY3-A*-3A</i>	1.00	0.45	0.50	0.60	0.80
<i>PY4-A*-1A</i>	1.00	0.50	0.55	0.65	0.80
<i>PY4-A*-3A</i>	1.00	0.45	0.50	0.60	0.80
<i>VFK1-A0-*M</i>	1.00	0.30	0.40	0.50	0.70
<i>VFT1-A0-*M</i>	1.00	0.30	0.40	0.40	0.70
<i>VK1-A0-1*</i>	1.00	0.35	0.40	0.50	0.80
<i>VK1-A0-2*</i>	1.00	0.40	0.45	0.55	0.95
<i>VM1-A0-1*</i>	1.00	0.40	0.50	0.55	0.75
<i>VM1-A0-2*</i>	1.00	0.45	0.50	0.60	0.80
<i>VT1-A0-1B</i>	1.00	0.40	0.45	0.50	0.82
<i>VT1-A0-2B</i>	1.00	0.45	0.50	0.55	0.82

Proximity Sensor Terminology

Mounting type

Shielded (embeddable) on flush proximity switches


These proximity switches may be flush mounted regardless of the metal being used. For reliable operation, it is necessary to observe the minimum distances from adjacent metal targets.

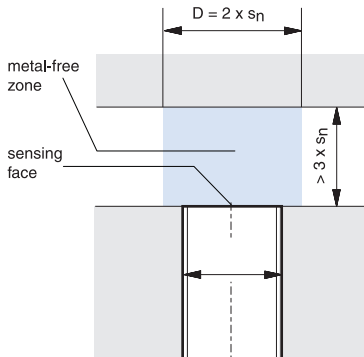

s_n = Nominal sensing distance (see Rated operating distance)

Unshielded (non-embeddable) on non-flush proximity switches

When mounting non-embeddable mounting proximity switches in conducting materials (metals), it is necessary to observe the minimum distances from adjacent metal targets. Flush mounting in non-conducting materials is permitted.

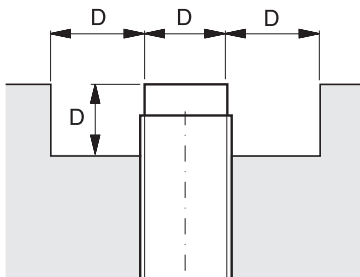

Off-state (leakage) current

This is the current that flows through the load circuit of the proximity switch in the OFF state at the maximum supply voltage.

Open collector

The output transistor is not internally connected to a pull-up or pull-down load. It is therefore possible to connect an external load supplied by an external voltage.

Operating distance (assured sensing range) (S_a)

The operating distance is the distance at which a standard target approaching the active face of the sensor causes a sensor output state change.

Output type and load connections – 3-wire NPN

There are two power wires and one output wire. The switching element is connected between the output wire and the negative terminal, and the load is connected between the output wire and the positive terminal. In the ON state, the current sinks from the load into the switching element.

Output type and load connections – 3-wire PNP

There are two power wires and one output wire. The switching element is connected between the output wire and the positive terminal, and the load is connected between the output wire and the negative terminal. In the ON state, the current flows from the switching element into the load.

Overvoltage protection

No damage will occur in the presence of surge pulses exceeding U_b and energy less than 0.5J.

Polarity reversing protection

No damage will occur to proximity switches if the supply wires are reversed.

Protection against inductive loads

Unless otherwise specified, DC sensors are protected against inductive over-voltage by use of a surge diode or a zener diode.

Unshielded proximity switches

The sensor housing does not cover the side of the sensing head. This type of sensor has a higher sensing range than the shielded type.

Rated insulation voltage (U_i)

Unless specified differently, all of the sensors with a supply voltage of up to 50 VAC and 75 VDC are tested at 500 VAC.

Sensors with a supply voltage up to 250 VAC are tested as follows:

- Class 1 (with earth terminal) at 1500 VAC
- Class 2 (with double insulation, without earth terminal) at 3000 VAC.

Nominal sensing distance — (Rated operating distance) (S_n)

This distance does not take into account manufacturing tolerances ($\pm 10\%$) or variations due to external conditions, such as voltages and temperatures not falling within the rated values.

Repeat accuracy (R)

The repeat accuracy of the effective operating distance (S_r) is measured over an eight hour period at an ambient temperature of 73°F ($\pm 9^\circ$) [23°C ($\pm 5^\circ$)] at a specified humidity and with a specified supply voltage. The difference between the measurements shall not exceed the specified value, or if not specified, 10% of S_n .

Ripple

This is given as a percentage of the mean supply voltage. It is the maximum peak-to-peak value of the admitted ripple voltage. A ripple voltage of $< 10\% U_b$ is desirable.

Proximity Sensor Terminology

Shocks

In accordance with IEC 60068-2-27

Pulse shape: half-sine

Peak acceleration: 30g

Pulse duration: 11 ms

Shielded proximity switches

A metal housing surrounds the coil, and only the front of the active face is sensitive. The device allows flush installation on metal plates without any performance change. Refer to Alignment when installing shielded sensors side-by-side.

Short-circuit protection


All DC sensors have integrated short-circuit protection. AC sensors should be protected externally by such devices as fuses.

No load supply (current consumption)

Amount of current consumed by sensor when output is not energized.

Standard target

A standard target is square, 1 mm thick, and made from type FE360 carbon steel. The length of the side of the square is equal to the diameter of the sensor's active surface, or three times the rated operating distance (S_n), whichever is greater.



Nominal Sensing Distance

Switching frequency (f)

Switching frequency is the maximum output switching frequency performed by the output circuit when standard targets cross the sensing field at a distance of $S_n/2$. The targets are spaced $2d$.

- For DC sensors, the minimum output pulse width must not fall below $50 \mu\text{s}$.
- For AC sensors, the minimum output pulse must not fall below half a sine period (ie. for 60 Hz, $1/60 \div 2 = 8.33 \text{ ms}$.)

Temperature range

Unless otherwise specified, the minimum temperature range is -13 to $+158^\circ\text{F}$ (-25 to $+70^\circ\text{C}$).

Turn-on time

Turn-on time is the elapsed time from when the target enters the sensing range until the output switches.

Turn-off time

Turn-off time is the elapsed time from when the target is removed until the output switches.

Operating voltage (U_b)

Supply voltage range for safe and correct sensor operation.

Operating (load) Current

Maximum current the sensor output is capable of switching.

Voltage drop (U_d)

This is the voltage measured across the active output of the proximity switch when the rated operational current (I_e) flows in the load at the rated supply voltage and the temperature is at 73°F ($\pm 9^\circ$) [23°C ($\pm 5^\circ$)]. Unless specified differently, the following values are guaranteed:

- Two-wire DC models $< 8 \text{ VDC}$
- Three-wire DC models $< 3.5 \text{ VDC}$
- Two-wire AC models $< 10 \text{ VAC}$

Vibration

In accordance with IEC 60868-2-6

Frequency range: 10-55 Hz

Amplitude: 1 mm

Sweep cycle duration: 5 min.

Duration of endurance at 55 Hz: 30 min. in each of the three axis directions

4-wire NPN or PNP (programmable output state)

There are two power wires: one NO/NC selection input wire and one output wire. The output state is programmable by connecting the input wire to one of the power supply lines.

4-wire NPN or PNP (complementary outputs)

There are two power wires: one normally open output wire and one normally closed output wire.

4-wire NPN and PNP

There are two power wires, and the output type is wiring programmable. An NPN output is available by connecting the PNP terminal to the negative power supply line. A PNP output is available by connecting the NPN terminal to the positive power supply line.


Time delay before availability (t_v)

The time delay before availability is the time between the switching on of the supply voltage and the instant at which the sensor becomes ready to operate correctly.


During the reset the output circuit is in OFF-state; false signal may be present but the duration shall not exceed 2 ms. If not specified otherwise, the reset duration doesn't exceed 300 ms.

Field Device Examples – 3-Wire Connections

NPN (Sinking)
Field Device Example

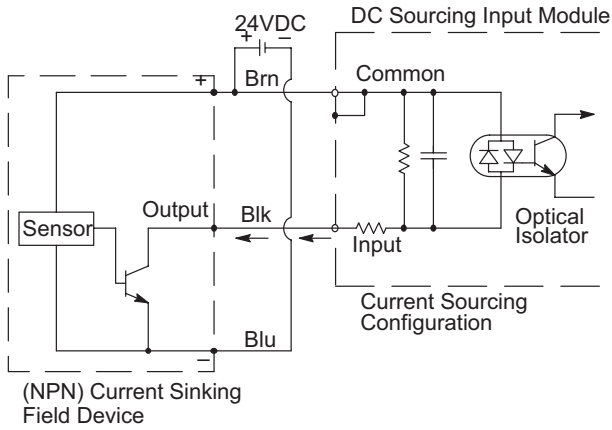

PNP (Sourcing)
Field Device Example

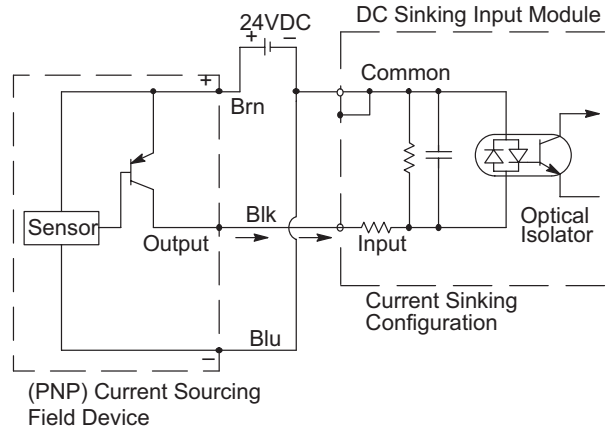

Frequently Asked Questions

How do inductive proximity switches work?

Inductive proximity switches are used to detect the presence of metallic objects without actually contacting the object. Their high-speed switching and small size make them indispensable in automation applications.

Inductive proximity switches consist of a coil driven by an oscillator. The oscillator creates an electromagnetic field which appears at the active face of the switch. If a metal target enters this area, the electromagnetic field is reduced and the switch turns on or off.

Some typical inductive sensor applications are: counting metallic objects, monitoring the position of elements in a machine, sensing the presence of metallic parts like screws, etc., and measuring the rotational speed of axial detecting cams.

What is the difference between inductive and capacitive sensors?

The primary difference is sensing material. Inductive sensors only detect metallic objects while capacitive sensors will detect materials such as wood, paper, liquids, cardboard, etc.

How do I know what size proximity sensor I need?

It depends on two factors: mounting space and sensing distance. Each application has a specific space available for the sensor and each application has a requirement for how close the sensor can be mounted to the sensed object.

What is the difference between shielded and unshielded?

With a shielded proximity sensor, the face of the sensor may be mounted flush with metal, whereas an unshielded sensor may NOT be mounted flush with metal (otherwise the sensor will always be ON). In many applications, flush mounting is a requirement. Also, unshielded proximity sensors allow for greater sensing distances.

What output do I need? NPN or PNP?

This is determined by the device you are connecting the sensor to. Most DirectLOGIC PLC modules (except 305 series) allow NPN or PNP sensors to be connected. This is determined by how the sensor is wired to the PLC.

How do I choose between normally open (NO) and normally closed (NC)?

NO sensors do not pass power to the PLC until an object is detected. NC sensors always pass power to the PLC until an object is detected. The majority of Centsable sensors are NO; however, some sensors offer the option of NC, such as PKW, PMW and CT1 series.

When do I want quick disconnects (Q/D) versus embedded cable output?

There is a slight cost increase to purchase a sensor and a Q/D cable compared to only purchasing a sensor with a pre-attached cable. However, the Q/D output allows easy replacement of a failed sensor. This is important in minimizing machine or operation downtime.

What is the difference between 2-wire, 3-wire, and 4-wire sensors?

2-wire sensors: allows either NPN or PNP outputs (don't have to select).

3-wire sensors: standard sensors. When ordering, you must choose between NPN and PNP output.

4-wire sensors: Allow either NO or NC outputs (don't have to select). Must still select NPN or PNP output.

Do AutomationDirect supplied sensors operate on AC or DC voltage?

The majority of AutomationDirect supplied sensors operate on 10-30 VDC. However, we do offer the VT1, VK1, VM1, VFT and VFK series that operate on 20-253VAC.

Can my sensor be installed in a washdown area?

Yes. Although most AutomationDirect sensors carry an IP67 protective rating which is suitable for submersion, we do offer units designed for harsh high-pressure cleaning environments. These units include the PFM, PFK, PFT, VFK and VFT series.

What does switching frequency mean to my application?

This is how fast your sensor can sense an object, reset, and sense another object. For example, if a sensor has a switching frequency of 100 Hz or 100 cycles per second, the sensor can sense a maximum of 100 objects per second. This is very critical in many applications such as gear rotation measurement.

Can the sensor be put into a vibrating environment?

Yes. Frequency range of 10-55 Hz, maximum amplitude of 1mm. Duration in any axis a maximum of 30 minutes.

What is the temperature range of the sensors?

Most sensors operate between -25°F and 70°F. However, check the specifications for exact ranges.

If I wire my proximity sensor wrong, will it damage it?

Possibly. All sensors contain polarity reversal, short-circuit and transient noise protection. However, the transient protection is only effective under 30 VDC.