


RHINO PSP Series 5,12 & 24 VDC Power Supplies

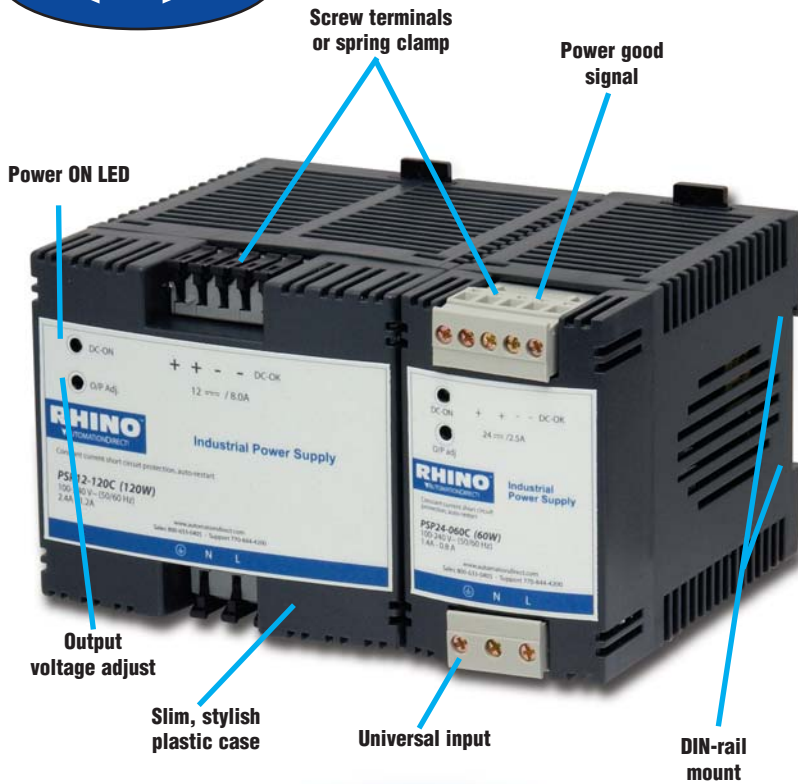

Slimline Power Supplies

RHINO PSP series power supplies are plastic housed ultracompact switching supplies available in 5V, 12V and 24V adjustable models. There are 13 models available with power ratings of 20W to 240W and up to 10A output current. They are DIN rail or panel-mountable and feature universal 85-264 VAC/DC inputs, adjustable DC voltage outputs, power good signal and feature low output ripple along with short circuit, overvoltage and overload protection.

The RHINO PSP series of switching power supplies offer an excellent price/performance ratio. They provide tightly regulated output voltage for sensitive loads in industrial environments. The slim plastic case is lightweight and compact, and comes in both screw and spring clamp terminal versions. The constant-current, short-circuit protection limits the output current as the voltage is reduced, to safely protect the control components from direct shorts and device failures. Once a fault is corrected, the power supply automatically resumes supplying full-voltage power. (PSPxx-024x models have foldback current protection with auto-recovery.)

The RHINO PSP power supplies have a **Power ON** LED for easy visual indication of operation as well as a **Power Good** signal for feedback to your system controller.

With a UL 508C rating, the RHINO PSP series is the right choice for space limited applications.

Features

- Regulated switch mode type
- Ultra-compact plastic case
- Finger-safe terminals
- Reliable snap-on mounting on DIN-rails
- Wall mounting bracket included
- Universal input 85-264 VAC, 50/60 Hz or 85-375 VDC (no DC input on PSP24-240S)
- Models with 5, 12 or 24 VDC output
- Output voltage adjustable
- Parallel operation up to five units (not PSP24-240S)
- Power good signal (some models)
- Low ripple and noise
- Overload and short-circuit protection
- UL/cUL 508 listed, UL/cUL 60950 recognized*
- Worldwide safety approvals
- 3-year product warranty

* Note: PSP24-240S is not cUL listed.
PSP05-020S, PSP12-024S, and PSP24-240S are not UL 60950 recognized.



Company Information

Systems Overview

Programmable Controllers

Field I/O

Software

C-more & other HMI

Drives

Soft Starters

Motors & Gearbox

Steppers/ Servos

Motor Controls

Proximity Sensors

Photo Sensors

Limit Switches

Encoders

Current Sensors

Pressure Sensors

Temperature Sensors

Pushbuttons/ Lights

Process

Relays/ Timers

Comm.

Terminal Blocks & Wiring

Power

Circuit Protection

Enclosures

Tools

Pneumatics

Appendix

Product Index

Part # Index

RHINO PSP Series Power Supplies Specifications



PSP05-020S
PSP12-024S
PSP24-024S



PSP24-024C



PSP12-060S
PSP24-060S



PSP12-060C
PSP24-060C




PSP12-120C
PSP24-120C



PSP24-120S
PSP12-120S



PSP24-240S




The unit can be mounted on a chassis or wall using the included mounting bracket.

Input Specifications							
Part Number	Input Voltage Range		Input Freq. Range	Input Current (Typical) at full load		Efficiency (Typ.)	C-Curve Circuit Breaker or Slow-blow Fuse
				115 VAC	230 VAC		
PSP05-020S	85-264 VAC 85-375 VDC	30% output derating below 93 VAC/ 130 VDC	47-63 Hz	0.35 A	0.2A	88%	5.0 A
PSP12-024S							
PSP24-024S							
PSP24-024C							
PSP12-060S		20% output derating below 93 VAC/ 130 VDC		0.35 A	0.2 A	88%	
PSP12-060C							
PSP24-060S		15% output derating below 93 VAC/ 130 VDC		1.2 A	0.6 A	88%	
PSP24-060C							
PSP12-120S							
PSP12-120C							
PSP24-120S		2.0 A		1.0 A	88%		
PSP24-120C							
PSP24-240S	85-132/ 187-264 VAC	20% output derating below 93 VAC	3.3 A	1.7 A			

Output Specifications									
Part Number	Price	Output Voltage	Output Volt. Adjust. Range	Output Current (Max.)	Output Power (Max.)	Hold-Up Time		MTBF (IEC 1709 @ 25°C)	
						115 VAC	230 VAC		
PSP05-020S	<--->	5.1 VDC	5-5.25 VDC	4.0 A	20 W	15 ms	125 ms	2,681,000 hours	
PSP12-024S	<--->	12 VDC	12-16 VDC	2.0 A	24 W				
PSP24-024S	<--->	24 VDC	24-28 VDC	1.0 A	24 W				
PSP24-024C	<--->								
PSP12-060S	<--->	12 VDC	12-15 VDC	4.0 A	60 W			2,947,000 hours	
PSP12-060C	<--->								
PSP24-060S	<--->	24 VDC	24-28 VDC	2.5 A	120 W				1,620,000 hours
PSP24-060C	<--->								
PSP12-120S	<--->	12 VDC	12-15 VDC	8.0 A					
PSP24-120S	<--->	24 VDC	24-28 VDC	5.0 A	240 W			1,912,000 hours	
PSP24-120C	<--->								
PSP24-240S	<--->			10.0 A					

Part numbering system

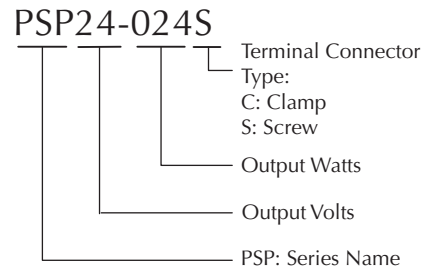

RHINO PSP Series Power Supplies Dimensions



Company Information

Systems Overview

Programmable Controllers

Field I/O

Software

C-more & other HMI

Drives

Soft Starters

Motors & Gearbox

Steppers/ Servos

Motor Controls

Proximity Sensors

Photo Sensors

Limit Switches

Encoders

Current Sensors

Pressure Sensors

Temperature Sensors

Pushbuttons/ Lights

Process

Relays/ Timers

Comm.

Terminal Blocks & Wiring

Power

Circuit Protection

Enclosures

Tools

Pneumatics


Appendix

Product Index

Part # Index

General Specifications							
Temperature	Operating: -10°C to +70°C (14°F to 158°F), Derating at 93-132 VAC or 130-187 VDC: -1.10%/C above 40°C, Derating at 187-264 VAC or 265-375 VDC: -1.67%/C above 50°C, Derating at 85-93 VAC or 85-130 VDC: -1.30%/C above 30°C, Temperature Coefficient: 0.02%/C Storage: -25°C to +85°C (-13°F to 185°F)						
Humidity	95% (non-condensing) relative humidity max.						
Output Regulation	2.5% (1% for PSP12-060x), 10 to 90% load variation						
Switching Frequency	55 - 180 kHz depending on load						
Safety Standards	IEC/EN 60950 (output SELV), UL 60950, UL 508, EN 50178, EN 60204, EN 61558-2-8						
Output Voltage Ripple	<50 mV peak-to-peak						
Output Protection	Current Limit at 120% typ., constant current, auto recovery (PSPxx-024x foldback, auto-recovery), Voltage Limit <40 VDC						
Power Good Signal*	<table border="0"> <tr> <td>Trigger Point</td> <td>Output Signal (reference to -Vout)</td> </tr> <tr> <td>12 VDC Models: >11 V</td> <td>11.0 V +/- 1.0 V @ 60 mA max.</td> </tr> <tr> <td>24 VDC Models: >22 V</td> <td>22.0 V +/- 2.0 V @ 30 mA max.</td> </tr> </table>	Trigger Point	Output Signal (reference to -Vout)	12 VDC Models: >11 V	11.0 V +/- 1.0 V @ 60 mA max.	24 VDC Models: >22 V	22.0 V +/- 2.0 V @ 30 mA max.
Trigger Point	Output Signal (reference to -Vout)						
12 VDC Models: >11 V	11.0 V +/- 1.0 V @ 60 mA max.						
24 VDC Models: >22 V	22.0 V +/- 2.0 V @ 30 mA max.						
Electromagnetic Compatibility (EMC)	EN 61000-3-2, EN 61000-6-2, EN 61000-6-3						
Enclosure Rating	IP 20						
Enclosure Material	Plastic FR2010-110C (UL 94 V-0 rated)						
Mounting	35 mm DIN rails, snap on with self-locking spring or wall mount adapter included						
Connection	S models: Plug-in Screw Terminals, C Models: Clamp Terminals. For 28-12 AWG wire						
Agency Approvals	UL/cUL 508 listed File E197592(PSP24-240S not cUL), UL 60950 recognized, file E198298 (except PSP05-020S, PSP12-024S and PSP24-240S).						
*Note: PSP05-020S, PSP12-024S and PSP24-024x models do not have Power Good output.							
Note: All specifications are valid at nominal input voltage, full load and +25°C after warmup time, unless otherwise stated.							


PSP05-020S, PSP12-024S, PSP24-024x

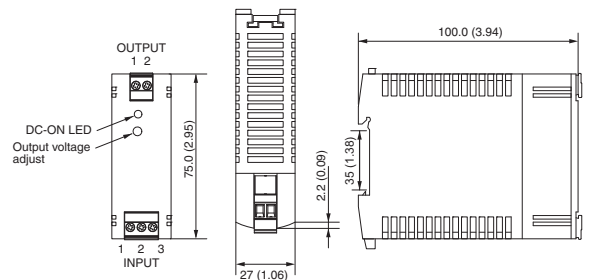

Weight: 140g (4.9 oz.)

Input	Output
1 AC Ground	1 +Vout
2 Neutral	2 -Vout
3 Line	

PSPxx-060x

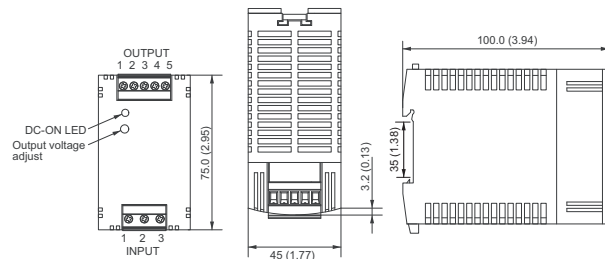


Weight: 265g (9.4 oz.)

Input	Output
1 AC Ground	1 +Vout
2 Neutral	2 +Vout
3 Line	3 -Vout
	4 -Vout
	5 Power Good

Note: All dimensions are in millimeters (inches).


PSPxx-120x

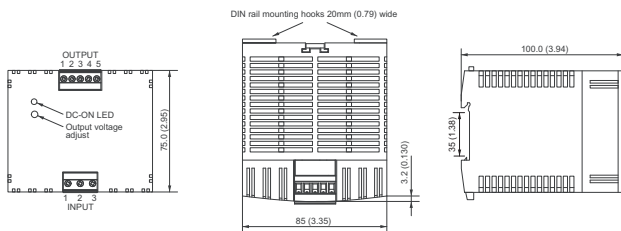

Weight: 440g (15.5 oz.)

Input	Output
1 AC Ground	1 +Vout
2 Neutral	2 +Vout
3 Line	3 -Vout
	4 -Vout
	5 Power Good

PSP24-240S

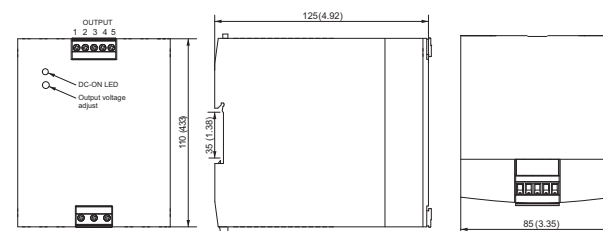

Weight: 950g (33.5 oz.)

Input	Output
1 AC Ground	1 +Vout
2 Neutral	2 +Vout
3 Line	3 -Vout
	4 -Vout
	5 Power Good